

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: ALL-PRO

Report Number: P167652

Luminaire Tested: **REV2XX35-WALL-ODEGREES**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P167652  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P33939)  
Test Lab: INNOVATION CENTER P2  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: ALL-PRO  
Catalog Number: REV2XX35-WALL-0DEGREES  
Description: R-EVOLVE WALL MOUNT WITH TWIN OPTICS.  
(2) LEDS WITH BOTH OPTICS ORIENTED AT 0 DEGREES  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2149.7 lumens  
Efficiency: N/A  
Efficacy: 80.5 lumens/watt  
Luminous Opening: Rectangular w/ Sides (W: 0.75' x L: 0.25' x H: 0.04')  
IES Classification: Type II - Short - Non-Cutoff  
BUG Rating: B0 - U3 - G2


Input Watts (W): 26.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



REPORT NUMBER: P167652  
 CATALOG NUMBER: REV2XX35-WALL-0DEGREES

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

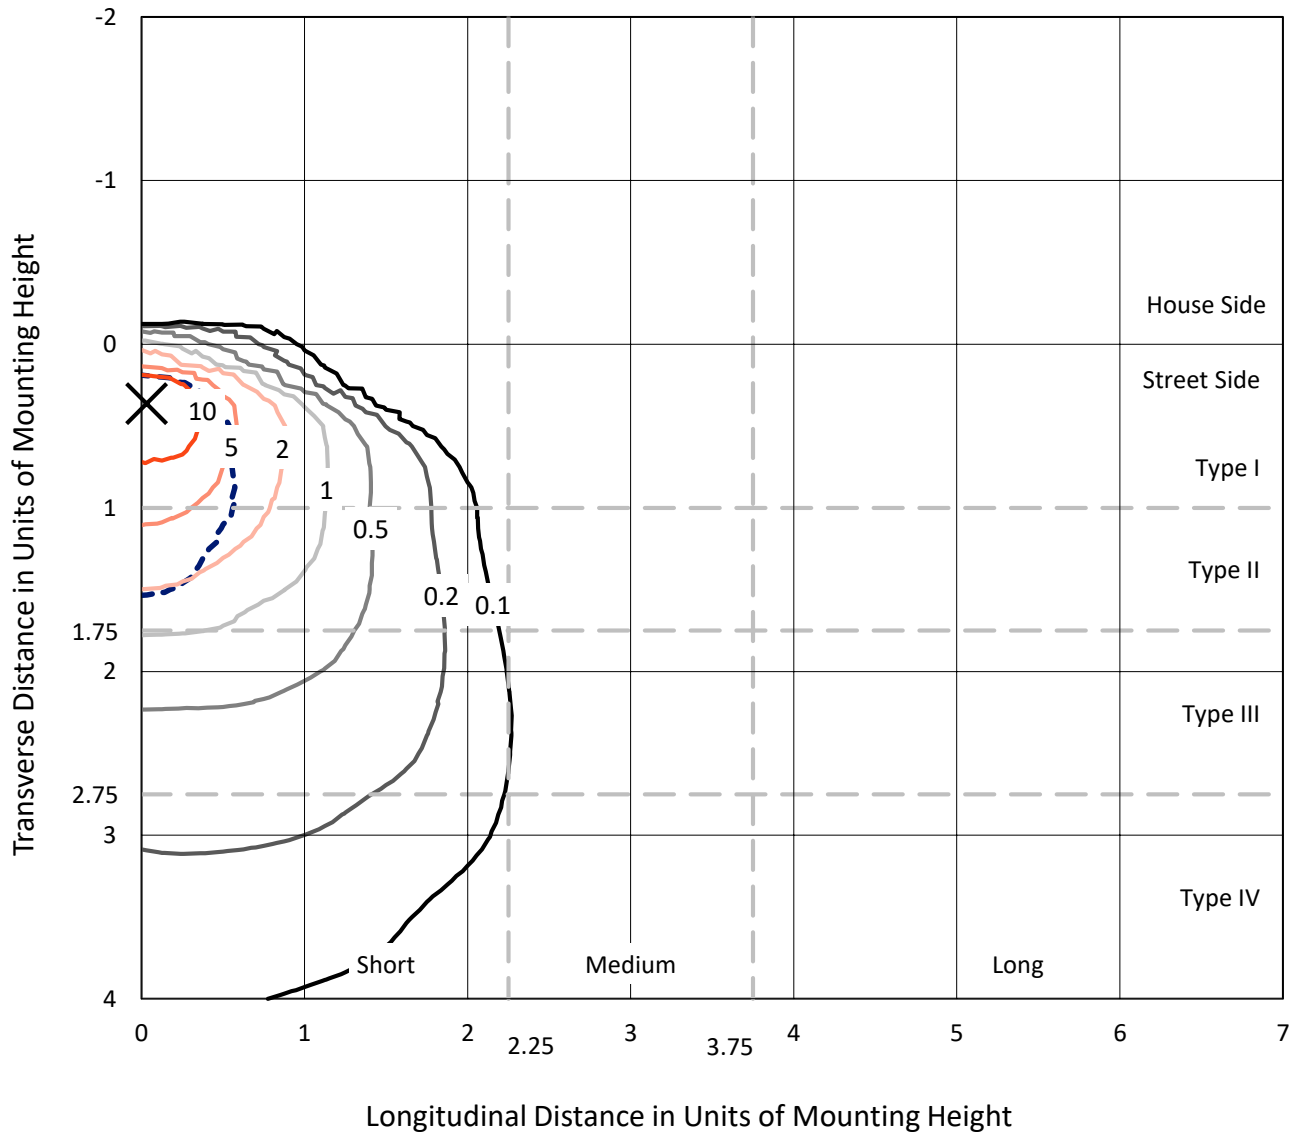

Based on 10 foot mounting height. Maximum calculated value = 18.2 fc  
 Type II - Short - Non-Cutoff

REPORT NUMBER: P167652  
CATALOG NUMBER: REV2XX35-WALL-0DEGREES

### Luminous Intensity Polar Plot

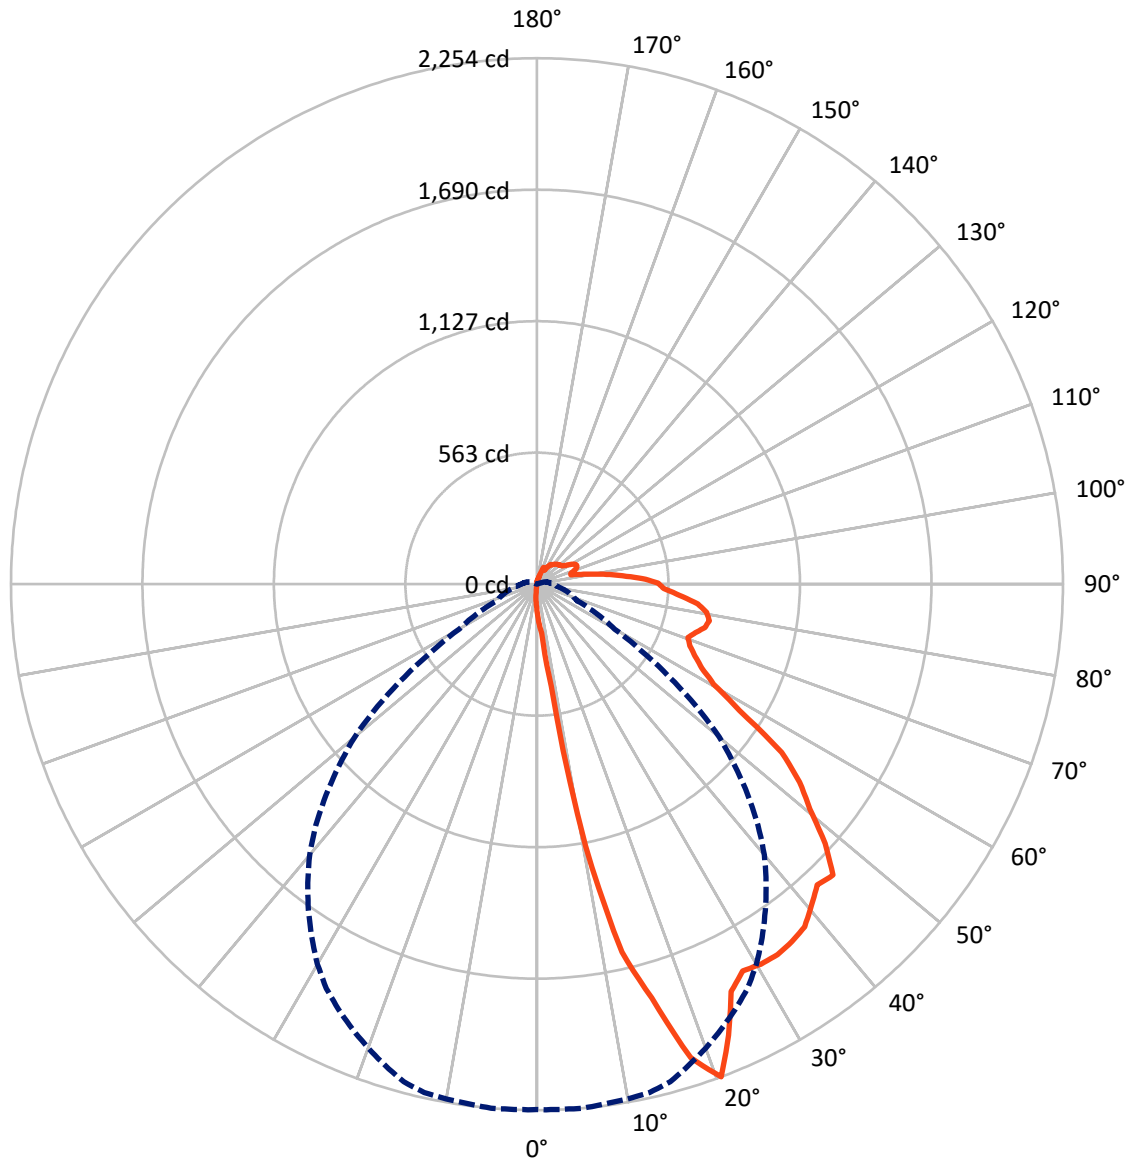

— Vertical Plane Through 5-Deg Lateral      - - - Horizontal Cone Through 20-Deg Vertical

REPORT NUMBER: P167652

CATALOG NUMBER: REV2XX35-WALL-0DEGREES


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	9.3	1.1	10.5
	% Fixture	0.4	0.1	0.5
<b>Street Side</b>	Lumens	1933.5	205.7	2139.2
	% Fixture	89.9	9.6	99.5
<b>Total</b>	Lumens	1942.8	206.9	2149.7
	% Fixture	90.4	9.6	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	15.5	0.7
10°-20°	132.5	6.2
20°-30°	278.3	12.9
30°-40°	341.8	15.9
40°-50°	337.4	15.7
50°-60°	283.4	13.2
60°-70°	225.7	10.5
70°-80°	190.4	8.9
80°-90°	137.7	6.4
90°-100°	75.1	3.5
100°-110°	38.8	1.8
110°-120°	32.0	1.5
120°-130°	22.1	1.0
130°-140°	16.6	0.8
140°-150°	12.0	0.6
150°-160°	7.1	0.3
160°-170°	2.6	0.1
170°-180°	0.6	0.0
0°-90°	1942.8	90.4
0°-180°	2149.7	100.0

**Coefficient of Utilization**

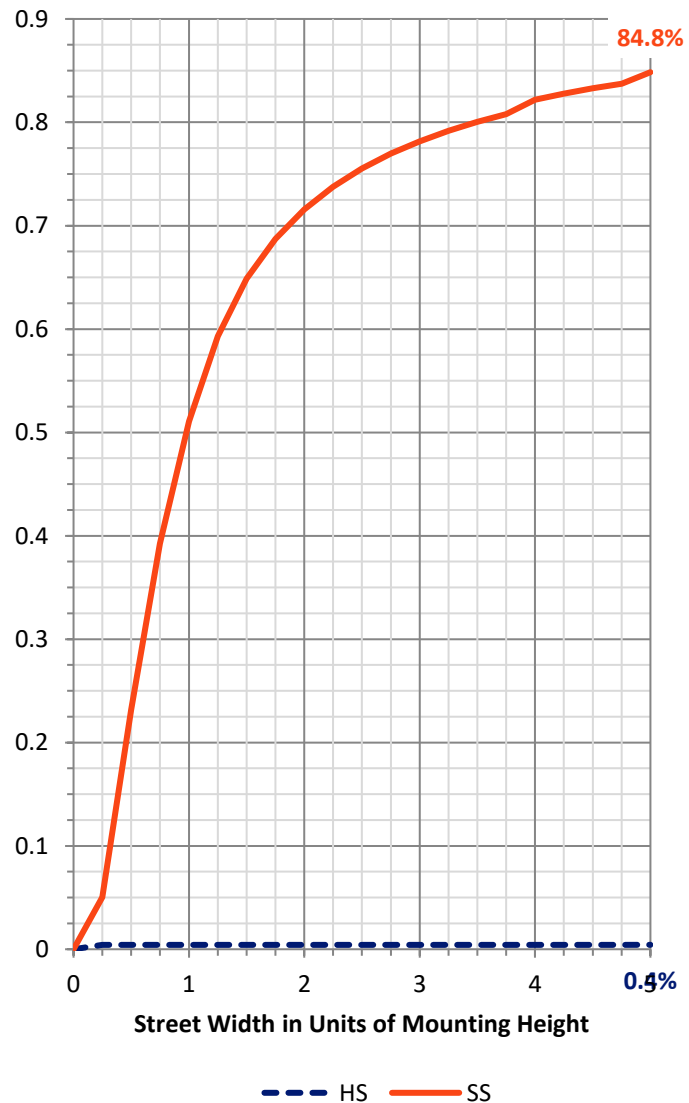

REPORT NUMBER: P167652


CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	419.6	19.5			
FM	(30°-60°)	960.5	44.7			
FH	(60°-80°)	415.8	19.3			G0/660
FVH	(80°-90°)	137.6	6.4			G2/225
BL	(0°-30°)	6.8	0.3	B0/110		
BM	(30°-60°)	2.1	0.1	B0/220		
BH	(60°-80°)	0.3	0.0	B0/110		G0/110
BVH	(80°-90°)	0.1	0.0			G0/10
UL	(90°-100°)	75.1	3.5		U3/500	
UH	(100°-180°)	1.1	0.1		U1/10	

**BUG Rating: B0-U3-G2**

Type II Short

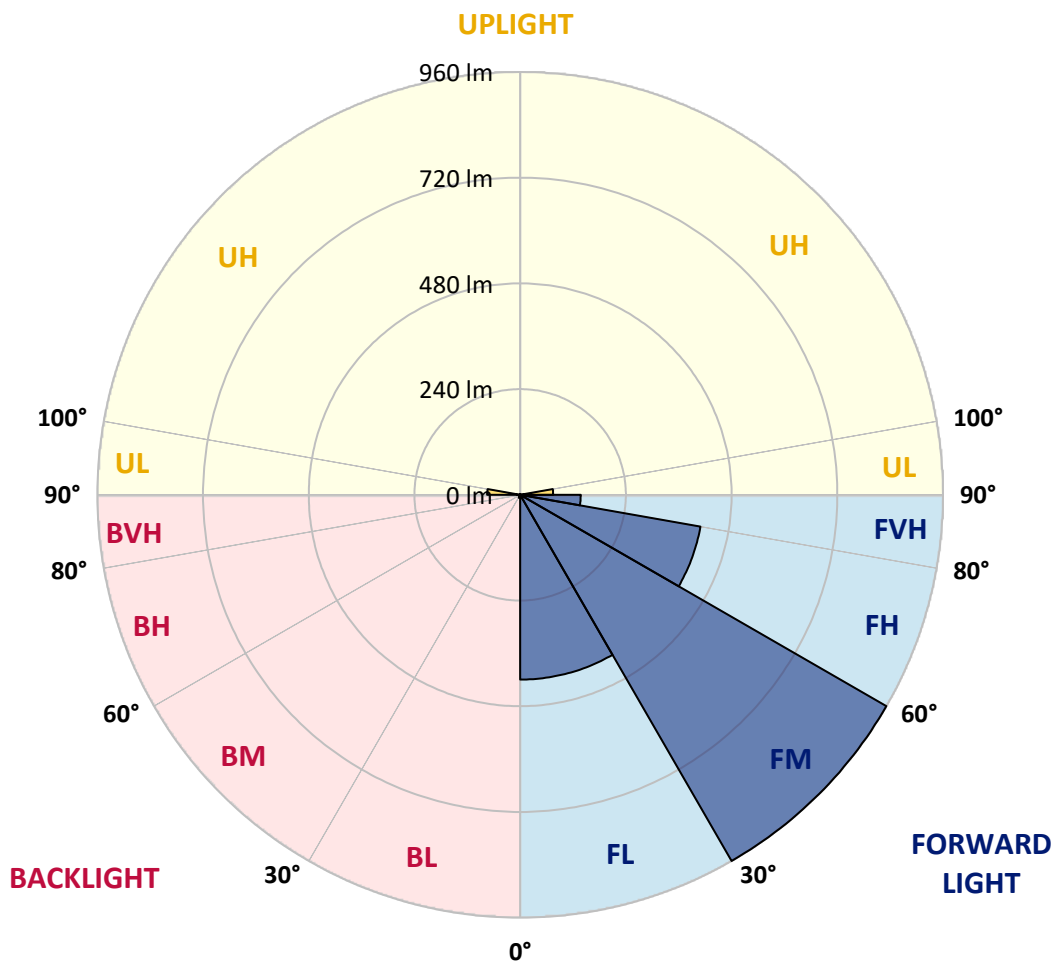



REPORT NUMBER: P167652

CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (FULL):**

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
0°	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8
2.5°	165.0	164.8	164.5	164.3	164.1	163.9	163.6	161.3	160.5	159.6	158.6
5°	210.3	210.1	209.8	209.6	209.4	206.9	205.7	204.4	202.8	201.0	199.1
7.5°	452.5	447.2	442.0	436.8	421.4	410.9	399.4	387.2	374.3	360.7	346.7
10°	1165.9	1153.2	1140.6	1128.0	1073.1	1037.4	997.2	952.6	903.8	850.9	794.3
12.5°	1634.4	1626.1	1617.9	1588.3	1563.0	1532.5	1496.6	1455.1	1408.1	1355.4	1284.7
15°	1828.7	1834.0	1839.4	1832.1	1826.2	1815.9	1800.8	1780.4	1742.9	1681.9	1617.2
17.5°	2137.5	2135.8	2134.1	2114.8	2100.4	2083.1	2063.2	2023.0	1965.1	1903.5	1838.2
20°	2251.9	2252.9	2253.9	2246.1	2239.8	2231.3	2206.9	2162.4	2114.9	2064.3	2010.6
22.5°	2100.2	2100.2	2100.2	2112.8	2122.7	2133.3	2129.1	2123.2	2114.9	2103.3	2087.7
25°	1905.9	1916.5	1934.0	1952.3	1972.5	1986.5	1996.7	2005.8	2013.1	2017.8	2019.5
27.5°	1799.4	1836.8	1876.6	1914.2	1944.5	1944.2	1944.6	1945.8	1947.9	1951.0	1958.4
30°	1826.0	1858.3	1890.0	1922.5	1937.0	1934.3	1932.5	1931.6	1931.8	1933.2	1936.4
32.5°	1812.7	1852.5	1892.5	1931.7	1930.7	1923.5	1918.0	1914.6	1913.5	1914.2	1915.9
35°	1839.4	1859.9	1881.5	1902.0	1895.8	1890.9	1887.3	1885.0	1884.1	1883.0	1800.3
37.5°	1897.9	1879.5	1862.8	1850.3	1839.3	1832.3	1830.2	1833.3	1840.2	1772.8	1688.9
40°	1874.0	1840.5	1810.9	1789.2	1774.0	1762.0	1753.5	1748.9	1716.2	1653.7	1583.9
42.5°	1823.4	1790.5	1761.2	1739.9	1721.7	1704.7	1688.7	1662.6	1602.0	1542.4	1481.9
45°	1834.0	1807.4	1778.5	1732.6	1692.4	1660.9	1640.2	1572.8	1498.0	1433.9	1380.5
47.5°	1647.7	1654.9	1661.7	1612.0	1574.4	1551.1	1524.8	1449.0	1368.4	1301.6	1245.5
50°	1559.9	1540.9	1514.9	1449.9	1397.6	1359.6	1324.7	1279.3	1218.6	1139.9	1114.3
52.5°	1482.7	1453.2	1409.6	1338.0	1268.1	1204.1	1160.0	1135.4	1095.1	1055.3	1022.0
55°	1320.3	1303.2	1272.5	1220.6	1168.7	1119.9	1077.6	1036.0	1001.3	971.4	947.7
57.5°	1019.5	1013.2	1022.6	1021.4	1019.9	1006.0	970.1	936.5	909.7	881.4	855.7
60°	865.1	860.5	869.9	874.9	881.1	886.5	882.6	863.8	841.3	804.3	790.7
62.5°	790.6	788.6	791.6	797.9	810.0	825.1	834.4	835.0	815.6	789.4	785.8
65°	742.7	744.3	744.6	749.9	763.3	777.4	790.7	799.5	799.3	791.4	782.8
67.5°	705.4	706.5	707.3	717.1	734.8	746.0	754.7	765.2	772.2	772.3	767.4
70°	665.5	677.1	686.3	701.1	715.5	724.2	728.7	739.8	743.5	742.6	728.6
72.5°	686.8	701.7	710.1	713.6	716.2	722.9	724.5	731.0	726.2	712.0	688.6
75°	729.4	741.4	743.1	741.8	738.1	730.9	727.6	725.0	717.5	699.1	653.6
77.5°	750.6	757.4	754.8	755.0	745.9	734.9	721.3	716.7	695.4	654.5	607.6
80°	753.3	747.7	737.7	742.4	728.2	716.3	704.0	681.5	653.0	609.0	560.0
82.5°	708.1	701.2	694.2	679.8	679.7	667.5	648.7	630.4	598.0	552.5	508.1
85°	630.9	620.8	612.3	609.8	594.8	593.2	588.4	570.4	536.6	491.1	451.1
87.5°	556.3	550.5	544.0	540.8	539.2	536.0	525.6	498.0	460.8	423.2	392.0
90°	519.1	521.7	519.1	511.1	500.4	484.5	455.2	420.6	383.3	354.0	335.4
92.5°	463.2	468.0	453.5	442.6	428.1	405.7	370.2	339.0	314.6	300.2	278.0
95°	372.7	377.4	368.5	356.9	340.4	321.8	295.2	273.0	256.9	242.2	220.5
97.5°	308.8	309.7	301.3	291.6	274.8	256.0	237.8	222.6	207.9	190.6	168.3
100°	242.2	245.2	235.2	231.2	221.9	204.6	187.3	180.8	163.5	143.6	127.7
102.5°	189.0	188.0	183.0	179.4	174.5	162.6	155.0	144.9	132.6	117.9	100.0
105°	143.7	148.1	150.5	147.8	143.1	138.1	130.4	123.0	113.2	96.3	83.8
107.5°	157.1	158.2	153.6	148.3	140.3	133.1	127.4	116.8	108.0	94.8	76.1
110°	181.0	181.6	173.3	164.6	157.2	146.6	139.3	127.1	113.2	97.9	79.9



REPORT NUMBER: P167652

CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (continued):**

	0°	2.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	25°
112.5°	197.0	195.4	186.4	176.9	166.7	156.4	146.9	135.7	119.3	99.8	79.2
115°	197.0	196.3	188.5	180.2	169.3	159.3	148.6	136.7	120.3	99.5	77.2
117.5°	191.7	190.9	183.0	174.4	165.0	157.0	145.8	131.8	114.2	94.6	76.3
120°	173.0	173.0	166.8	159.0	150.1	142.7	133.7	117.4	102.2	87.8	73.0
122.5°	151.7	151.7	146.9	140.7	133.8	125.9	116.5	107.7	96.0	82.4	69.3
125°	141.1	139.2	135.4	130.6	125.2	118.4	110.5	101.1	89.8	77.7	66.2
127.5°	135.8	134.0	130.5	125.2	119.5	112.8	104.2	94.4	83.4	72.8	63.5
130°	130.4	128.9	126.0	120.6	114.5	107.7	98.9	89.8	80.5	70.8	61.9
132.5°	127.8	126.3	123.7	117.4	110.9	104.3	97.1	88.4	79.3	69.9	60.8
135°	122.4	121.1	119.3	113.6	107.6	101.6	95.5	87.6	79.0	70.6	62.3
137.5°	117.1	115.9	114.3	109.6	104.2	98.6	92.9	86.8	78.9	71.1	63.3
140°	111.8	110.7	109.1	105.6	100.6	95.5	90.2	85.0	78.9	72.1	65.2
142.5°	103.8	103.8	103.7	101.9	97.6	93.3	89.0	84.7	80.3	73.8	67.8
145°	103.8	102.9	101.2	98.9	94.2	89.5	85.0	80.7	76.9	71.3	63.6
147.5°	90.5	89.6	87.8	85.9	82.5	78.5	74.1	69.4	64.2	59.6	55.7
150°	71.9	71.9	71.6	71.3	69.8	67.2	64.4	61.4	58.2	54.7	51.0
152.5°	66.5	66.5	66.5	66.4	65.8	63.3	60.6	57.7	54.6	51.1	48.3
155°	69.2	68.0	67.1	66.3	65.6	64.1	62.2	60.3	58.3	56.1	53.8
157.5°	79.9	78.2	76.6	73.3	70.7	68.0	64.0	60.2	56.6	53.2	50.1
160°	53.2	53.7	54.2	53.6	53.2	52.5	50.9	48.3	45.6	42.9	40.0
162.5°	39.9	39.9	39.9	39.2	38.7	38.1	37.3	36.0	34.4	32.6	30.7
165°	29.3	29.3	29.3	28.9	28.6	28.1	27.6	27.0	26.2	25.0	23.8
167.5°	21.3	21.3	21.3	21.2	21.1	21.0	20.8	20.7	20.5	20.3	19.8
170°	18.6	18.6	18.6	18.6	18.5	18.5	18.4	18.3	18.2	18.0	17.8
172.5°	18.6	18.4	18.3	18.1	17.6	17.2	16.9	16.5	16.0	15.6	15.2
175°	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.5	10.5	10.4	10.4
177.5°	10.6	10.5	10.5	10.4	10.4	10.3	10.3	10.1	10.0	9.9	9.8
180°	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0





REPORT NUMBER: P167652

CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (continued):**

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
0°	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8
2.5°	157.5	156.4	155.2	153.9	152.6	151.2	149.8	148.3	146.7	145.1	143.5
5°	197.0	194.8	192.3	189.7	187.0	184.1	181.0	177.8	174.4	170.9	167.3
7.5°	332.1	317.3	302.1	286.7	271.1	255.4	240.0	222.9	206.3	197.7	191.6
10°	734.0	671.3	599.0	527.2	455.0	382.4	334.6	312.4	290.6	269.1	248.0
12.5°	1204.3	1119.6	1030.8	938.1	842.1	746.7	653.3	562.1	473.3	386.9	303.1
15°	1548.6	1476.3	1400.2	1298.7	1183.3	1063.5	939.4	811.3	679.5	575.6	481.7
17.5°	1769.4	1697.0	1613.1	1522.2	1426.6	1326.5	1222.1	1096.5	942.4	784.2	622.1
20°	1953.7	1880.6	1795.6	1706.3	1612.9	1515.5	1402.1	1277.9	1149.7	1019.4	860.4
22.5°	2054.0	1989.5	1920.7	1847.7	1770.3	1669.0	1542.0	1414.6	1291.5	1146.7	1008.1
25°	2009.7	1992.1	1966.5	1932.3	1831.7	1715.8	1602.7	1488.1	1350.6	1216.7	1096.2
27.5°	1965.2	1966.0	1923.3	1849.5	1766.3	1683.5	1603.4	1475.9	1359.6	1239.3	1100.2
30°	1941.1	1876.1	1807.5	1735.7	1663.3	1590.4	1501.3	1412.3	1314.7	1194.9	1080.5
32.5°	1834.4	1760.4	1688.2	1621.7	1547.3	1471.5	1392.4	1309.9	1217.4	1144.3	1051.4
35°	1719.9	1641.6	1565.7	1493.5	1422.3	1349.6	1281.5	1210.1	1143.4	1071.6	1002.4
37.5°	1602.3	1518.8	1438.8	1360.9	1291.4	1234.6	1172.5	1108.7	1042.4	978.4	913.6
40°	1504.2	1412.9	1317.3	1242.4	1185.6	1127.9	1066.1	1000.1	932.3	866.4	807.0
42.5°	1410.7	1326.0	1241.8	1162.3	1088.3	1028.9	968.8	897.7	823.5	754.8	719.7
45°	1318.7	1252.5	1170.8	1087.1	1008.0	934.7	870.3	814.7	768.9	726.0	681.1
47.5°	1207.5	1157.4	1086.5	1009.4	924.3	847.2	812.1	777.9	742.9	700.5	654.9
50°	1090.7	1050.2	996.6	922.1	869.9	827.6	787.3	745.9	707.4	668.5	630.7
52.5°	991.0	957.6	907.2	880.9	847.9	812.6	768.2	723.2	675.2	632.3	588.3
55°	919.3	891.6	871.9	850.3	822.3	787.9	749.6	701.9	640.1	582.0	532.6
57.5°	850.3	848.7	833.8	814.4	791.9	760.3	712.5	657.3	597.6	532.9	478.4
60°	808.8	810.4	795.4	776.7	752.8	716.6	669.7	612.2	551.0	486.7	424.8
62.5°	794.4	794.6	770.3	742.6	715.7	677.9	628.3	568.7	503.2	441.2	379.5
65°	792.3	782.9	753.7	718.3	685.7	644.3	589.2	526.8	459.2	397.1	338.3
67.5°	759.1	759.0	737.4	700.8	655.9	604.1	542.8	479.3	413.5	350.1	292.1
70°	721.4	724.4	717.1	663.0	610.1	554.8	494.3	430.3	364.1	300.4	243.2
72.5°	675.1	667.1	651.3	614.8	563.2	507.4	444.1	383.4	316.7	257.9	207.6
75°	623.8	607.0	589.1	562.6	513.1	456.6	394.1	331.9	270.4	213.3	167.4
77.5°	573.9	553.8	530.9	500.8	455.8	400.8	340.6	279.6	219.5	165.0	122.7
80°	527.0	502.4	475.5	440.6	396.0	343.2	285.1	229.0	175.6	131.8	101.0
82.5°	477.0	452.2	421.8	384.7	340.6	293.6	238.5	185.7	138.3	104.6	83.5
85°	423.3	399.9	367.1	329.4	285.5	241.7	188.8	138.9	96.8	73.7	64.1
87.5°	368.2	346.0	312.5	273.6	230.3	189.6	141.1	98.5	66.8	54.9	52.0
90°	314.1	290.1	255.5	215.6	175.7	135.8	95.8	66.5	50.6	47.9	45.3
92.5°	252.9	226.4	196.2	160.0	127.6	98.5	72.2	55.3	48.8	44.4	41.9
95°	196.0	170.6	146.9	122.0	98.5	77.7	59.0	48.7	45.6	40.8	38.2
97.5°	141.5	116.0	101.9	89.8	77.1	65.1	52.5	45.4	41.5	37.1	34.6
100°	110.2	93.7	81.0	70.5	61.9	54.0	46.4	41.7	37.2	33.3	31.0
102.5°	84.3	75.8	69.7	62.4	56.6	49.3	43.1	38.8	33.9	30.1	27.9
105°	73.3	66.4	61.3	55.5	51.6	44.7	39.9	36.6	31.3	27.9	26.3
107.5°	63.1	59.8	55.8	51.5	47.1	41.4	37.0	34.9	27.9	25.7	25.0
110°	65.0	55.8	51.1	47.4	44.0	39.5	35.7	31.5	26.0	24.0	24.0



REPORT NUMBER: P167652

CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (continued):**

	27.5°	30°	32.5°	35°	37.5°	40°	42.5°	45°	47.5°	50°	52.5°
112.5°	63.4	55.0	48.8	44.6	41.8	37.4	33.6	28.7	25.2	23.6	22.7
115°	60.9	52.5	46.6	43.3	39.4	35.1	30.8	26.4	24.3	22.7	21.8
117.5°	61.7	50.7	44.5	40.7	36.7	32.6	28.8	25.8	23.3	21.5	21.3
120°	60.6	51.3	43.8	37.9	33.8	30.6	27.7	25.4	23.0	21.6	22.0
122.5°	58.4	49.6	42.3	36.9	32.3	29.5	27.2	24.9	22.7	21.5	22.4
125°	55.6	45.6	40.5	35.8	32.2	29.1	26.5	24.3	22.3	21.5	22.2
127.5°	54.0	46.1	38.8	34.7	31.0	27.9	25.8	23.9	21.9	21.3	20.2
130°	53.9	46.9	40.2	33.6	29.0	27.0	25.4	24.1	22.2	20.9	19.3
132.5°	54.0	47.5	41.1	35.1	30.2	26.6	25.9	23.5	21.3	20.4	19.4
135°	54.1	47.8	42.1	36.8	33.8	31.4	26.2	21.3	21.1	20.3	19.0
137.5°	55.9	48.3	43.3	41.3	39.1	32.7	27.2	24.5	22.2	19.4	18.6
140°	58.5	53.4	49.6	44.1	38.0	33.0	29.4	26.3	23.1	20.8	19.5
142.5°	62.6	55.5	48.3	42.2	37.5	33.5	29.8	26.5	23.7	21.6	20.1
145°	56.3	49.9	45.3	40.9	36.7	32.7	29.0	25.9	23.2	22.0	20.9
147.5°	51.3	47.0	42.8	38.8	34.9	31.8	28.7	25.4	23.9	23.2	20.8
150°	46.8	43.2	39.6	37.6	35.3	32.7	30.9	29.2	27.0	23.1	19.6
152.5°	46.1	43.7	41.5	39.6	37.8	36.1	34.5	29.9	26.0	22.3	18.9
155°	50.0	46.8	44.4	42.6	39.3	35.1	31.1	27.2	23.5	20.1	17.1
157.5°	47.3	43.7	40.2	36.8	33.4	30.0	26.5	23.0	19.7	17.8	16.0
160°	37.1	34.5	31.9	29.3	26.5	23.6	21.4	19.6	17.8	16.1	14.9
162.5°	28.7	26.5	24.8	23.1	21.5	19.9	18.3	17.0	16.2	15.3	14.4
165°	22.5	21.2	19.9	19.0	18.3	17.6	16.9	16.2	15.4	14.7	13.9
167.5°	19.3	18.8	18.2	17.7	17.1	16.5	15.9	15.3	14.7	14.0	13.4
170°	17.5	17.2	16.7	16.3	15.8	15.4	14.7	13.9	13.1	12.2	11.3
172.5°	14.7	14.2	13.7	13.2	12.7	12.2	11.7	11.1	10.4	10.0	9.7
175°	10.3	10.3	10.2	10.1	9.9	9.8	9.7	9.5	9.4	9.2	9.0
177.5°	9.7	9.6	9.5	9.4	9.3	9.1	9.0	8.9	8.8	8.7	8.5
180°	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0



REPORT NUMBER: P167652

CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (continued):**

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°
0°	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8
2.5°	141.8	140.1	138.4	136.6	134.8	132.9	131.1	129.2	127.3	125.4	123.5
5°	163.6	159.7	155.8	152.3	148.7	145.1	141.5	137.8	134.1	130.4	126.7
7.5°	185.3	178.9	172.3	165.7	158.9	152.1	145.2	139.6	134.4	129.1	124.0
10°	227.4	207.2	188.3	178.9	169.8	160.6	151.2	141.8	132.4	125.6	119.5
12.5°	269.9	247.2	225.6	205.0	185.2	169.8	158.0	146.0	134.0	121.9	113.4
15°	393.2	309.8	239.5	217.3	198.6	181.4	165.5	150.8	136.1	121.4	106.6
17.5°	472.0	381.1	312.0	247.5	198.1	183.5	169.1	154.8	139.4	123.8	108.4
20°	691.8	527.1	384.8	317.1	251.3	187.3	170.5	155.2	140.1	124.3	108.6
22.5°	873.2	709.3	542.0	380.6	295.6	231.9	170.6	153.5	137.8	122.2	106.9
25°	941.2	803.1	658.5	496.8	342.8	255.8	197.7	149.8	133.6	117.8	103.0
27.5°	966.1	828.4	692.4	558.0	413.5	275.4	208.8	158.2	128.1	113.0	98.7
30°	955.1	838.2	720.5	601.0	477.9	336.3	208.9	162.6	121.0	106.4	93.3
32.5°	958.0	850.7	737.1	622.7	507.7	380.7	240.7	156.1	118.7	97.7	86.2
35°	918.8	829.7	727.1	620.4	510.9	403.8	269.5	140.3	109.4	87.0	77.6
37.5°	851.2	773.4	691.5	592.6	501.1	396.2	287.8	160.7	100.8	78.8	69.9
40°	749.2	704.0	646.8	582.5	493.8	397.9	294.2	180.8	94.7	73.9	62.2
42.5°	692.4	662.5	628.2	568.8	491.2	400.1	288.8	183.8	89.8	67.5	54.1
45°	646.6	618.4	589.6	544.6	486.0	390.5	282.7	170.6	94.1	59.7	45.6
47.5°	601.0	571.4	543.0	517.4	460.6	378.6	275.8	161.2	92.7	54.6	41.0
50°	574.4	524.2	495.6	469.0	423.8	356.3	259.1	158.2	88.2	49.9	37.6
52.5°	543.0	482.8	450.3	421.8	386.3	325.4	233.2	144.2	77.2	44.2	34.0
55°	493.6	444.7	404.0	375.4	344.5	284.4	202.8	119.9	60.1	38.6	29.7
57.5°	434.8	397.4	357.2	328.4	296.4	245.5	175.7	100.7	52.2	36.1	27.7
60°	373.1	343.6	311.4	283.6	254.9	214.6	156.6	91.4	52.0	34.4	26.0
62.5°	329.8	295.5	265.7	238.4	213.2	178.8	129.1	79.2	47.8	32.0	24.2
65°	287.1	247.2	217.9	191.4	170.8	137.3	96.1	60.8	39.9	29.0	22.3
67.5°	241.8	198.5	168.3	143.3	129.0	104.2	74.1	49.7	35.4	27.6	21.7
70°	200.5	163.4	139.5	122.4	109.6	91.0	66.5	45.2	33.0	26.6	21.4
72.5°	167.6	135.1	113.9	100.2	89.3	75.8	57.0	39.5	30.1	25.3	21.0
75°	131.5	103.5	85.9	76.5	68.5	58.9	46.1	32.7	26.8	23.8	20.6
77.5°	92.5	71.9	61.9	59.0	55.6	50.0	42.0	31.4	25.6	22.4	18.9
80°	81.5	65.7	57.0	54.9	52.6	47.9	41.7	32.3	25.0	21.1	17.1
82.5°	70.3	58.4	52.0	50.6	49.3	45.5	41.0	33.3	24.5	19.8	15.4
85°	57.7	50.4	46.7	46.3	45.9	43.0	40.1	34.5	24.0	18.7	13.4
87.5°	49.1	44.6	43.0	42.9	42.9	41.4	39.9	40.9	29.1	18.6	14.6
90°	42.6	39.9	39.9	39.9	39.9	39.9	39.9	47.9	34.6	18.6	16.0
92.5°	37.7	36.8	36.8	36.9	38.5	41.4	51.2	68.8	64.9	33.6	18.7
95°	33.7	33.9	34.0	34.2	37.1	42.3	60.7	87.3	93.1	48.3	21.3
97.5°	31.3	31.5	31.7	32.1	35.2	41.4	58.2	82.3	89.2	56.2	34.5
100°	28.9	29.2	29.4	30.1	33.4	40.0	55.2	77.6	86.8	64.6	46.6
102.5°	26.5	26.8	27.1	28.1	31.6	38.5	52.4	73.4	85.2	73.2	58.7
105°	25.4	25.2	25.5	26.4	29.5	36.1	48.6	67.8	82.0	79.5	68.8
107.5°	23.9	23.7	24.0	24.4	26.9	32.3	42.0	56.7	69.1	70.5	61.5
110°	22.0	22.2	22.5	21.9	24.2	28.1	34.6	45.3	57.1	61.7	54.3



REPORT NUMBER: P167652  
 CATALOG NUMBER: REV2XX35-WALL-0DEGREES

REPORT N  
 CATALOG

**CANDELA DISTRIBUTION (continued):**

**CANDELA**

	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°	77.5°	80°	
112.5°	21.4	21.5	21.2	18.9	21.3	23.1	25.8	33.5	46.2	53.2	47.3	0°
115°	21.9	21.6	20.0	18.8	20.7	20.8	20.6	25.4	37.8	44.8	40.2	2.5°
117.5°	22.8	20.9	19.2	19.0	20.0	20.1	19.2	22.7	32.0	35.4	31.9	5°
120°	23.5	19.2	18.7	18.9	19.3	19.0	17.9	19.3	24.9	26.2	23.9	7.5°
122.5°	21.2	18.6	18.6	18.6	18.6	17.5	15.9	15.3	16.5	17.2	16.5	10°
125°	19.4	18.6	18.6	18.5	18.0	16.2	14.2	12.2	10.4	10.4	10.5	12.5°
127.5°	18.6	18.6	18.6	18.0	16.8	14.9	13.0	11.0	9.7	9.8	9.8	15°
130°	18.7	18.6	18.6	17.0	15.4	13.5	11.7	9.8	9.0	9.1	9.2	17.5°
132.5°	18.6	18.6	17.7	16.0	14.0	12.2	10.4	8.6	8.4	8.5	8.4	20°
135°	18.6	18.4	16.7	15.0	13.2	11.4	9.6	8.0	7.8	7.8	7.4	22.5°
137.5°	18.6	17.3	15.7	14.0	12.3	10.6	8.9	7.7	7.1	7.2	6.4	25°
140°	18.0	16.2	14.6	13.0	11.4	9.8	8.2	7.1	6.4	6.5	5.4	27.5°
142.5°	18.6	16.5	14.3	12.3	10.7	9.0	7.5	6.2	5.7	5.8	4.4	30°
145°	18.8	16.4	14.1	12.0	10.3	8.7	7.2	5.7	5.4	4.9	3.4	32.5°
147.5°	18.1	15.6	13.3	11.5	10.0	8.5	7.1	6.0	5.5	4.4	3.1	35°
150°	16.7	14.2	12.3	11.0	9.6	8.3	7.0	6.1	5.3	4.0	2.7	37.5°
152.5°	15.7	13.6	12.0	10.5	9.2	8.0	6.8	5.7	4.6	3.5	2.7	40°
155°	15.1	13.4	11.9	10.6	9.4	8.1	6.9	5.6	4.3	3.1	2.8	42.5°
157.5°	14.3	13.0	11.9	10.7	9.6	8.5	7.3	5.9	4.5	3.5	3.4	45°
160°	13.9	12.8	11.8	10.8	9.8	8.8	7.2	5.7	4.3	4.1	4.1	47.5°
162.5°	13.6	12.6	11.7	10.8	9.7	8.2	6.7	5.2	4.8	4.8	4.7	50°
165°	13.1	12.4	11.6	10.1	8.7	7.3	5.9	5.6	5.5	5.4	5.4	52.5°
167.5°	12.4	11.2	10.1	9.0	7.8	7.1	6.8	6.5	6.3	6.1	5.7	55°
170°	10.5	9.6	8.7	8.3	8.0	7.7	7.4	7.1	6.8	6.4	5.9	57.5°
172.5°	9.3	9.0	8.7	8.4	8.1	7.8	7.5	7.2	6.8	6.4	6.1	60°
175°	8.8	8.6	8.3	8.1	7.8	7.6	7.3	7.0	6.8	6.5	6.2	62.5°
177.5°	8.4	8.3	8.2	8.0	7.9	7.8	7.6	7.5	7.4	7.3	7.1	65°
180°	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	67.5°
												70°
												72.5°
												75°
												77.5°
												80°
												82.5°
												85°
												87.5°
												90°
												92.5°
												95°
												97.5°
												100°
												102.5°
												105°
												107.5°
												110°



NUMBER: P167652  
 NUMBER: REV2XX35-WALL-0DEGREES

REPORT NUMBER: P  
 CATALOG NUMBER:

**DISTRIBUTION (continued):**

**CANDELA DISTRIBUTION**

82.5°	85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°	112.5°	82.5°
119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	112.5°	35.0
121.6	119.6	117.7	115.8	114.2	112.7	111.1	109.6	108.1	106.6	105.1	115°	29.7
123.0	119.2	115.5	111.8	109.0	106.3	103.5	100.8	98.1	95.4	92.8	117.5°	23.9
118.9	113.8	108.8	103.8	100.1	96.4	92.8	89.2	85.7	82.2	78.8	120°	18.4
113.4	107.5	101.6	95.8	91.4	87.1	82.9	78.7	74.5	71.1	67.6	122.5°	13.4
106.8	100.4	94.1	87.9	83.1	78.5	73.8	69.3	65.1	61.6	58.2	125°	9.1
99.0	92.5	86.1	79.9	75.1	70.4	65.7	61.6	57.3	53.4	49.7	127.5°	8.3
95.7	88.4	81.1	73.9	68.7	63.6	58.6	54.0	49.7	45.5	39.3	130°	7.4
93.2	84.4	76.1	67.9	62.5	57.1	52.2	47.1	42.4	38.3	24.7	132.5°	6.5
91.8	80.4	71.1	61.9	56.3	50.9	45.5	40.5	35.5	25.0	12.4	135°	5.6
88.9	76.4	66.1	55.9	50.3	44.8	39.4	34.1	27.1	14.9	2.5	137.5°	4.7
85.2	72.4	61.8	51.3	46.1	40.9	35.5	30.1	19.9	7.2	0.0	140°	3.9
80.5	68.1	57.3	46.6	42.0	37.4	32.2	26.9	13.9	0.7	0.0	142.5°	3.3
74.8	63.6	52.7	42.0	38.0	34.0	29.1	21.9	8.4	0.0	0.0	145°	2.7
68.2	58.5	48.0	37.3	34.2	30.8	26.4	17.3	3.6	0.0	0.0	147.5°	2.7
61.7	53.1	43.7	34.0	30.7	27.0	22.4	12.2	0.0	0.0	0.0	150°	2.7
54.6	47.2	39.2	30.6	27.2	23.2	18.2	7.8	0.0	0.0	0.0	152.5°	2.7
47.0	41.0	34.5	27.3	23.7	19.3	14.3	4.4	0.0	0.0	0.0	155°	2.7
39.1	34.4	29.6	24.0	20.2	15.4	9.6	2.0	0.0	0.0	0.0	157.5°	3.4
35.2	31.0	26.7	21.3	17.4	12.9	7.5	0.6	0.0	0.0	0.0	160°	4.0
31.7	27.6	23.8	18.6	14.6	10.6	5.7	0.0	0.0	0.0	0.0	162.5°	4.5
28.0	24.1	20.7	16.0	11.8	8.4	4.2	0.0	0.0	0.0	0.0	165°	4.7
24.1	20.5	17.7	13.3	9.0	6.4	3.0	0.0	0.0	0.0	0.0	167.5°	5.1
22.3	18.5	15.9	12.0	8.1	5.5	2.2	0.0	0.0	0.0	0.0	170°	5.4
20.6	16.7	14.1	10.6	7.2	4.7	1.6	0.0	0.0	0.0	0.0	172.5°	5.7
19.0	14.8	12.2	9.3	6.4	4.0	1.2	0.0	0.0	0.0	0.0	175°	6.0
17.3	12.9	10.4	8.0	5.6	3.2	0.8	0.0	0.0	0.0	0.0	177.5°	7.0
16.9	12.9	10.4	7.4	4.9	3.0	0.6	0.0	0.0	0.0	0.0	180°	8.0
16.6	13.0	10.4	6.7	4.2	2.9	0.5	0.0	0.0	0.0	0.0		
16.2	13.0	10.4	6.0	3.5	2.8	0.4	0.0	0.0	0.0	0.0		
15.8	13.1	10.6	5.3	2.8	2.7	0.3	0.0	0.0	0.0	0.0		
13.9	11.8	9.3	4.7	2.7	2.7	0.2	0.0	0.0	0.0	0.0		
12.0	10.6	8.0	4.0	2.7	2.7	0.1	0.0	0.0	0.0	0.0		
10.1	9.3	6.7	3.4	2.7	2.7	0.1	0.0	0.0	0.0	0.0		
8.0	8.0	5.3	2.7	2.7	2.7	0.0	0.0	0.0	0.0	0.0		
9.3	6.7	5.3	2.7	2.7	2.7	0.0	0.0	0.0	0.0	0.0		
10.6	5.3	5.3	2.7	2.7	2.7	0.0	0.0	0.0	0.0	0.0		
13.3	6.7	5.3	2.7	2.7	2.7	0.0	0.0	0.0	0.0	0.0		
16.0	8.0	5.3	2.7	2.7	2.7	0.0	0.0	0.0	0.0	0.0		
25.5	14.1	8.0	4.0	4.0	3.4	0.1	0.0	0.0	0.0	0.0		
33.9	20.0	10.6	5.3	5.3	4.0	0.2	0.0	0.0	0.0	0.0		
43.0	25.5	13.3	6.7	6.7	4.8	0.3	0.0	0.0	0.0	0.0		
50.8	30.8	16.0	8.0	8.0	5.5	0.5	0.0	0.0	0.0	0.0		
45.5	27.3	15.0	8.7	8.7	5.6	0.7	0.0	0.0	0.0	0.0		
40.2	24.0	14.3	9.3	9.3	5.8	1.0	0.0	0.0	0.0	0.0		

'167652  
 REV2XX35-WALL-0DEGREES

REPORT NUMBER: P167652  
 CATALOG NUMBER: REV2XX35

**TION (continued):**

**CANDELA DISTRIBUTION (con**

85°	87.5°	90°	92.5°	95°	97.5°	100°	102.5°	105°	107.5°		110°	112.5°
20.6	13.6	10.0	10.0	6.0	1.2	0.0	0.0	0.0	0.0	0°	119.8	119.8
17.6	13.0	10.6	10.6	6.3	1.5	0.0	0.0	0.0	0.0	2.5°	103.7	102.3
15.0	11.7	10.0	9.4	5.7	1.6	0.0	0.0	0.0	0.0	5°	90.2	87.6
12.6	10.4	9.3	8.2	5.1	1.6	0.0	0.0	0.0	0.0	7.5°	76.0	73.3
10.1	9.2	8.7	7.0	4.4	1.6	0.0	0.0	0.0	0.0	10°	64.8	61.9
8.0	8.0	8.0	5.8	3.6	1.5	0.0	0.0	0.0	0.0	12.5°	54.9	51.6
7.3	7.3	7.4	4.7	3.2	1.7	0.0	0.0	0.0	0.0	15°	46.4	34.0
6.7	6.7	6.7	3.6	2.7	1.9	0.0	0.0	0.0	0.0	17.5°	27.4	15.5
6.0	6.0	6.0	2.6	2.0	2.1	0.2	0.0	0.0	0.0	20°	12.2	0.0
5.3	5.3	5.3	1.6	1.1	2.3	0.5	0.0	0.0	0.0	22.5°	0.0	0.0
4.6	4.4	4.0	1.3	0.7	1.9	0.6	0.0	0.0	0.0	25°	0.0	0.0
4.0	3.5	2.7	1.0	0.4	1.1	0.5	0.0	0.0	0.0	27.5°	0.0	0.0
3.3	2.6	1.4	0.5	0.1	0.5	0.3	0.0	0.0	0.0	30°	0.0	0.0
2.7	1.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	32.5°	0.0	0.0
2.7	1.8	0.7	0.3	0.0	0.0	0.0	0.0	0.0	0.0	35°	0.0	0.0
2.7	2.0	1.3	0.7	0.0	0.0	0.0	0.0	0.0	0.0	37.5°	0.0	0.0
2.6	2.3	2.0	1.1	0.2	0.0	0.0	0.0	0.0	0.0	40°	0.0	0.0
2.7	2.7	2.7	1.6	0.4	0.0	0.0	0.0	0.0	0.0	42.5°	0.0	0.0
3.2	3.0	2.7	1.9	1.1	0.6	0.3	0.1	0.0	0.0	45°	0.0	0.0
3.6	3.1	2.7	2.2	1.7	1.3	0.9	0.4	0.0	0.0	47.5°	0.0	0.0
3.9	3.3	2.7	2.5	2.3	2.1	1.7	1.1	0.5	0.0	50°	0.0	0.0
4.0	3.4	2.7	2.7	2.7	2.7	2.7	1.9	1.3	0.6	52.5°	0.0	0.0
4.5	3.9	3.4	3.2	3.1	2.9	2.8	2.5	1.9	1.4	55°	0.0	0.0
4.9	4.5	4.0	3.8	3.5	3.3	3.1	2.9	2.7	2.2	57.5°	0.0	0.0
5.4	5.0	4.7	4.4	4.1	3.9	3.7	3.4	3.2	2.9	60°	0.0	0.0
5.8	5.5	5.3	5.1	4.8	4.6	4.4	4.2	4.0	3.8	62.5°	0.0	0.0
6.9	6.8	6.7	6.5	6.3	6.1	6.0	5.8	5.7	5.5	65°	0.0	0.0
8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	67.5°	0.0	0.0
										70°	0.0	0.0
										72.5°	0.0	0.0
										75°	0.0	0.0
										77.5°	0.0	0.0
										80°	0.0	0.0
										82.5°	0.0	0.0
										85°	0.0	0.0
										87.5°	0.0	0.0
										90°	0.0	0.0
										92.5°	0.0	0.0
										95°	0.0	0.0
										97.5°	0.0	0.0
										100°	0.0	0.0
										102.5°	0.0	0.0
										105°	0.0	0.0
										107.5°	0.0	0.0
										110°	0.0	0.0

REPORT NUMBER: P167652  
CATALOG NUMBER: REV2XX35-WALL-0D

5-WALL-0DEGREES

**tinued):**

**CANDELA DISTRIBUTION (continued):**

115°	117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°	110°	112.5°	115°	
119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	112.5°	0.0	0.0	0.0
100.8	99.5	98.1	96.8	95.5	94.3	93.1	91.9	90.8	115°	0.0	0.0	0.0
85.0	82.4	79.9	78.3	76.8	75.3	73.8	72.4	71.1	117.5°	0.0	0.0	0.0
71.1	69.0	66.9	64.9	62.9	61.0	59.1	57.9	51.3	120°	0.0	0.0	0.0
59.2	56.5	53.8	46.3	38.7	31.3	24.0	16.9	10.0	122.5°	0.0	0.0	0.0
45.1	35.6	26.1	16.8	7.6	0.0	0.0	0.0	0.0	125°	0.0	0.0	0.0
23.0	12.1	1.2	0.0	0.0	0.0	0.0	0.0	0.0	127.5°	0.0	0.0	0.0
3.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	130°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	132.5°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	135°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	137.5°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	140°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	142.5°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	145°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	147.5°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	150°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	152.5°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	155°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	157.5°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	160°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	162.5°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	165°	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	167.5°	0.8	0.3	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	170°	1.7	1.3	0.9
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	172.5°	2.7	2.3	2.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	175°	3.6	3.4	3.1
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	177.5°	5.4	5.2	5.1
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	180°	8.0	8.0	8.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0				



REPORT NUMBER: P167652

CATALOG NUMBER: REV2XX35-WALL-0DEGREES

DEGREES

**CANDELA DISTRIBUTION (continued):**

117.5°	120°	122.5°	125°	127.5°	130°	132.5°	135°		137.5°	140°	142.5°	145°
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0°	119.8	119.8	119.8	119.8
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.5°	89.7	88.6	87.6	86.7
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5°	69.8	68.6	67.4	66.3
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	7.5°	46.4	41.3	36.5	31.9
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10°	3.2	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	12.5°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	15°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	17.5°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	22.5°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	25°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	27.5°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	30°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	32.5°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	35°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	37.5°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	40°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	42.5°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	45°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	47.5°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	50°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	52.5°	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	55°	0.0	0.0	0.0	0.0
0.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	57.5°	0.0	0.0	0.0	0.0
1.7	1.4	1.1	0.8	0.5	0.2	0.0	0.0	60°	0.0	0.0	0.0	0.0
2.9	2.7	2.5	2.3	2.1	1.9	1.8	1.6	62.5°	0.0	0.0	0.0	0.0
4.9	4.8	4.6	4.5	4.4	4.2	4.1	4.0	65°	0.0	0.0	0.0	0.0
8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	67.5°	0.0	0.0	0.0	0.0
								70°	0.0	0.0	0.0	0.0
								72.5°	0.0	0.0	0.0	0.0
								75°	0.0	0.0	0.0	0.0
								77.5°	0.0	0.0	0.0	0.0
								80°	0.0	0.0	0.0	0.0
								82.5°	0.0	0.0	0.0	0.0
								85°	0.0	0.0	0.0	0.0
								87.5°	0.0	0.0	0.0	0.0
								90°	0.0	0.0	0.0	0.0
								92.5°	0.0	0.0	0.0	0.0
								95°	0.0	0.0	0.0	0.0
								97.5°	0.0	0.0	0.0	0.0
								100°	0.0	0.0	0.0	0.0
								102.5°	0.0	0.0	0.0	0.0
								105°	0.0	0.0	0.0	0.0
								107.5°	0.0	0.0	0.0	0.0
								110°	0.0	0.0	0.0	0.0





REPORT NUMBER: P167652  
 CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (continued):**

147.5°	150°	152.5°	155°	157.5°	160°	162.5°		137.5°	140°	142.5°	145°	147.5°
119.8	119.8	119.8	119.8	119.8	119.8	119.8	112.5°	0.0	0.0	0.0	0.0	0.0
85.8	85.0	84.2	83.5	82.8	82.2	81.7	115°	0.0	0.0	0.0	0.0	0.0
65.3	64.3	63.4	62.6	61.9	61.2	60.6	117.5°	0.0	0.0	0.0	0.0	0.0
27.7	23.7	20.0	16.6	13.5	10.7	8.2	120°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	122.5°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	125°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	127.5°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	130°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	132.5°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	135°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	137.5°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	140°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	142.5°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	145°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	147.5°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	150°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	152.5°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	155°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	157.5°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	160°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	162.5°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	165°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	167.5°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	170°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	172.5°	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0	175°	1.4	1.3	1.1	1.0	0.8
0.0	0.0	0.0	0.0	0.0	0.0	0.0	177.5°	3.9	3.7	3.6	3.5	3.4
0.0	0.0	0.0	0.0	0.0	0.0	0.0	180°	8.0	8.0	8.0	8.0	8.0
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						
0.0	0.0	0.0	0.0	0.0	0.0	0.0						



REPORT NUMBER: P167652

CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (continued):**

150°	152.5°	155°	157.5°	160°	162.5°		165°	167.5°	170°	172.5°	175°	177.5°
0.0	0.0	0.0	0.0	0.0	0.0	0°	119.8	119.8	119.8	119.8	119.8	119.8
0.0	0.0	0.0	0.0	0.0	0.0	2.5°	81.2	80.8	80.5	80.2	80.1	79.9
0.0	0.0	0.0	0.0	0.0	0.0	5°	60.1	59.6	59.2	59.0	58.8	58.6
0.0	0.0	0.0	0.0	0.0	0.0	7.5°	6.0	4.2	2.7	1.5	0.7	0.2
0.0	0.0	0.0	0.0	0.0	0.0	10°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	12.5°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	15°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	17.5°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	20°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	22.5°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	25°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	27.5°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	30°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	32.5°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	35°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	37.5°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	40°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	42.5°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	45°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	47.5°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	50°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	52.5°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	55°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	57.5°	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	0.0	60°	0.0	0.0	0.0	0.0	0.0	0.0
0.7	0.6	0.5	0.4	0.3	0.3	62.5°	0.0	0.0	0.0	0.0	0.0	0.0
3.3	3.2	3.1	3.1	3.0	2.9	65°	0.0	0.0	0.0	0.0	0.0	0.0
8.0	8.0	8.0	8.0	8.0	8.0	67.5°	0.0	0.0	0.0	0.0	0.0	0.0
						70°	0.0	0.0	0.0	0.0	0.0	0.0
						72.5°	0.0	0.0	0.0	0.0	0.0	0.0
						75°	0.0	0.0	0.0	0.0	0.0	0.0
						77.5°	0.0	0.0	0.0	0.0	0.0	0.0
						80°	0.0	0.0	0.0	0.0	0.0	0.0
						82.5°	0.0	0.0	0.0	0.0	0.0	0.0
						85°	0.0	0.0	0.0	0.0	0.0	0.0
						87.5°	0.0	0.0	0.0	0.0	0.0	0.0
						90°	0.0	0.0	0.0	0.0	0.0	0.0
						92.5°	0.0	0.0	0.0	0.0	0.0	0.0
						95°	0.0	0.0	0.0	0.0	0.0	0.0
						97.5°	0.0	0.0	0.0	0.0	0.0	0.0
						100°	0.0	0.0	0.0	0.0	0.0	0.0
						102.5°	0.0	0.0	0.0	0.0	0.0	0.0
						105°	0.0	0.0	0.0	0.0	0.0	0.0
						107.5°	0.0	0.0	0.0	0.0	0.0	0.0
						110°	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P167652  
CATALOG NUMBER: REV2XX35-WALL-0DEGREES

CANDELA DISTRIBUTION (continued):

180°	182.5°	185°	187.5°	190°		165°	167.5°	170°	172.5°	175°	177.5°	180°
119.8	119.8	119.8	119.8	119.8	112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
79.9	79.9	80.1	80.2	80.5	115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
58.6	58.6	58.8	59.0	59.2	117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.2	0.7	1.5	2.7	120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	175°	0.2	0.1	0.1	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	0.0	177.5°	2.9	2.8	2.8	2.7	2.7	2.7	2.7
0.0	0.0	0.0	0.0	0.0	180°	8.0	8.0	8.0	8.0	8.0	8.0	8.0
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								
0.0	0.0	0.0	0.0	0.0								



REPORT NUMBER: P167652  
 CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (continued):**

182.5°	185°	187.5°	190°		192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°
0.0	0.0	0.0	0.0	0°	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8
0.0	0.0	0.0	0.0	2.5°	80.8	81.2	81.7	82.2	82.8	83.5	84.2	85.0
0.0	0.0	0.0	0.0	5°	59.6	60.1	60.6	61.2	61.9	62.6	63.4	64.3
0.0	0.0	0.0	0.0	7.5°	4.2	6.0	8.2	10.7	13.5	16.6	20.0	23.7
0.0	0.0	0.0	0.0	10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	12.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	15°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	17.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	22.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	27.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.0	60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	0.1	62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
2.7	2.7	2.7	2.8	65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
8.0	8.0	8.0	8.0	67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
				110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P167652  
 CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (continued):**

212.5°	215°	217.5°		192.5°	195°	197.5°	200°	202.5°	205°	207.5°	210°	212.5°
119.8	119.8	119.8	112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85.8	86.7	87.6	115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65.3	66.3	67.4	117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
27.7	31.9	36.5	120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
<b>0.0</b>	<b>0.0</b>	<b>0.0</b>	132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	172.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	0.0	175°	0.1	0.2	0.3	0.3	0.4	0.5	0.6	0.7	0.8
0.0	0.0	0.0	177.5°	2.8	2.9	2.9	3.0	3.1	3.1	3.2	3.3	3.4
0.0	0.0	0.0	180°	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										
0.0	0.0	0.0										



REPORT NUMBER: P167652

CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (continued):**

215°	217.5°		220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°
0.0	0.0	0°	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8
0.0	0.0	2.5°	88.6	89.7	90.8	91.9	93.1	94.3	95.5	96.8	98.1	99.5
0.0	0.0	5°	68.6	69.8	71.1	72.4	73.8	75.3	76.8	78.3	79.9	82.4
0.0	0.0	7.5°	41.3	46.4	51.3	57.9	59.1	61.0	62.9	64.9	66.9	69.0
0.0	0.0	10°	0.0	3.2	10.0	16.9	24.0	31.3	38.7	46.3	53.8	56.5
0.0	0.0	12.5°	0.0	0.0	0.0	0.0	0.0	0.0	7.6	16.8	26.1	35.6
0.0	0.0	15°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.2	12.1
0.0	0.0	17.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	22.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	27.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	32.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	37.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	42.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	47.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	52.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	57.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	0.0	60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
1.0	1.1	62.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
3.5	3.6	65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
8.0	8.0	67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P167652  
 CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (continued):**

245°		220°	222.5°	225°	227.5°	230°	232.5°	235°	237.5°	240°	242.5°	245°
119.8	112.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100.8	115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85.0	117.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
71.1	120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
59.2	122.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45.1	125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
23.0	127.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
3.5	130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	132.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	137.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	142.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	147.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	152.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	157.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	162.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	167.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0.0	170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.9
0.0	172.5°	0.0	0.0	0.0	0.0	0.2	0.5	0.8	1.1	1.4	1.7	2.0
0.0	175°	1.3	1.4	1.6	1.8	1.9	2.1	2.3	2.5	2.7	2.9	3.1
0.0	177.5°	3.7	3.9	4.0	4.1	4.2	4.4	4.5	4.6	4.8	4.9	5.1
0.0	180°	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												
0.0												



REPORT NUMBER: P167652  
 CATALOG NUMBER: REV2XX35-WALL-0DEGREES

REPORT N  
 CATALOG

**CANDELA DISTRIBUTION (continued):**

**CANDELA**

	247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°	
0°	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	112.5°
2.5°	102.3	103.7	105.1	106.6	108.1	109.6	111.1	112.7	114.2	115.8	117.7	115°
5°	87.6	90.2	92.8	95.4	98.1	100.8	103.5	106.3	109.0	111.8	115.5	117.5°
7.5°	73.3	76.0	78.8	82.2	85.7	89.2	92.8	96.4	100.1	103.8	108.8	120°
10°	61.9	64.8	67.6	71.1	74.5	78.7	82.9	87.1	91.4	95.8	101.6	122.5°
12.5°	51.6	54.9	58.2	61.6	65.1	69.3	73.8	78.5	83.1	87.9	94.1	125°
15°	34.0	46.4	49.7	53.4	57.3	61.6	65.7	70.4	75.1	79.9	86.1	127.5°
17.5°	15.5	27.4	39.3	45.5	49.7	54.0	58.6	63.6	68.7	73.9	81.1	130°
20°	0.0	12.2	24.7	38.3	42.4	47.1	52.2	57.1	62.5	67.9	76.1	132.5°
22.5°	0.0	0.0	12.4	25.0	35.5	40.5	45.5	50.9	56.3	61.9	71.1	135°
25°	0.0	0.0	2.5	14.9	27.1	34.1	39.4	44.8	50.3	55.9	66.1	137.5°
27.5°	0.0	0.0	0.0	7.2	19.9	30.1	35.5	40.9	46.1	51.3	61.8	140°
30°	0.0	0.0	0.0	0.7	13.9	26.9	32.2	37.4	42.0	46.6	57.3	142.5°
32.5°	0.0	0.0	0.0	0.0	8.4	21.9	29.1	34.0	38.0	42.0	52.7	145°
35°	0.0	0.0	0.0	0.0	3.6	17.3	26.4	30.8	34.2	37.3	48.0	147.5°
37.5°	0.0	0.0	0.0	0.0	0.0	12.2	22.4	27.0	30.7	34.0	43.7	150°
40°	0.0	0.0	0.0	0.0	0.0	7.8	18.2	23.2	27.2	30.6	39.2	152.5°
42.5°	0.0	0.0	0.0	0.0	0.0	4.4	14.3	19.3	23.7	27.3	34.5	155°
45°	0.0	0.0	0.0	0.0	0.0	2.0	9.6	15.4	20.2	24.0	29.6	157.5°
47.5°	0.0	0.0	0.0	0.0	0.0	0.6	7.5	12.9	17.4	21.3	26.7	160°
50°	0.0	0.0	0.0	0.0	0.0	0.0	5.7	10.6	14.6	18.6	23.8	162.5°
52.5°	0.0	0.0	0.0	0.0	0.0	0.0	4.2	8.4	11.8	16.0	20.7	165°
55°	0.0	0.0	0.0	0.0	0.0	0.0	3.0	6.4	9.0	13.3	17.7	167.5°
57.5°	0.0	0.0	0.0	0.0	0.0	0.0	2.2	5.5	8.1	12.0	15.9	170°
60°	0.0	0.0	0.0	0.0	0.0	0.0	1.6	4.7	7.2	10.6	14.1	172.5°
62.5°	0.0	0.0	0.0	0.0	0.0	0.0	1.2	4.0	6.4	9.3	12.2	175°
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.8	3.2	5.6	8.0	10.4	177.5°
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.6	3.0	4.9	7.4	10.4	180°
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.5	2.9	4.2	6.7	10.4	
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.4	2.8	3.5	6.0	10.4	
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.3	2.7	2.8	5.3	10.6	
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.2	2.7	2.7	4.7	9.3	
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.1	2.7	2.7	4.0	8.0	
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.1	2.7	2.7	3.4	6.7	
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7	2.7	2.7	5.3	
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7	2.7	2.7	5.3	
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7	2.7	2.7	5.3	
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7	2.7	2.7	5.3	
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.7	2.7	2.7	5.3	
97.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.1	3.4	4.0	4.0	8.0	
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.2	4.0	5.3	5.3	10.6	
102.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.3	4.8	6.7	6.7	13.3	
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.5	5.5	8.0	8.0	16.0	
107.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.7	5.6	8.7	8.7	15.0	
110°	0.0	0.0	0.0	0.0	0.0	0.0	1.0	5.8	9.3	9.3	14.3	





NUMBER: P167652  
 NUMBER: REV2XX35-WALL-0DEGREES

REPORT NUMBER: P  
 CATALOG NUMBER:

**DISTRIBUTION (continued):**

**CANDELA DISTRIBUTION**

247.5°	250°	252.5°	255°	257.5°	260°	262.5°	265°	267.5°	270°	272.5°	275°	
0.0	0.0	0.0	0.0	0.0	0.0	1.2	6.0	10.0	10.0	13.6	0°	119.8
0.0	0.0	0.0	0.0	0.0	0.0	1.5	6.3	10.6	10.6	13.0	2.5°	119.6
0.0	0.0	0.0	0.0	0.0	0.0	1.6	5.7	9.4	10.0	11.7	5°	119.2
0.0	0.0	0.0	0.0	0.0	0.0	1.6	5.1	8.2	9.3	10.4	7.5°	113.8
0.0	0.0	0.0	0.0	0.0	0.0	1.6	4.4	7.0	8.7	9.2	10°	107.5
0.0	0.0	0.0	0.0	0.0	0.0	1.5	3.6	5.8	8.0	8.0	12.5°	100.4
0.0	0.0	0.0	0.0	0.0	0.0	1.7	3.2	4.7	7.4	7.3	15°	92.5
0.0	0.0	0.0	0.0	0.0	0.0	1.9	2.7	3.6	6.7	6.7	17.5°	88.4
0.0	0.0	0.0	0.0	0.0	0.2	2.1	2.0	2.6	6.0	6.0	20°	84.4
0.0	0.0	0.0	0.0	0.0	0.5	2.3	1.1	1.6	5.3	5.3	22.5°	80.4
0.0	0.0	0.0	0.0	0.0	0.6	1.9	0.7	1.3	4.0	4.4	25°	76.4
0.0	0.0	0.0	0.0	0.0	0.5	1.1	0.4	1.0	2.7	3.5	27.5°	72.4
0.0	0.0	0.0	0.0	0.0	0.3	0.5	0.1	0.5	1.4	2.6	30°	68.1
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.5	32.5°	63.6
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.7	1.8	35°	58.5
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.7	1.3	2.0	37.5°	53.1
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	1.1	2.0	2.3	40°	47.2
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	1.6	2.7	2.7	42.5°	41.0
0.0	0.0	0.0	0.0	0.1	0.3	0.6	1.1	1.9	2.7	3.0	45°	34.4
0.0	0.0	0.0	0.0	0.4	0.9	1.3	1.7	2.2	2.7	3.1	47.5°	31.0
0.0	0.0	0.0	0.5	1.1	1.7	2.1	2.3	2.5	2.7	3.3	50°	27.6
0.0	0.0	0.6	1.3	1.9	2.7	2.7	2.7	2.7	2.7	3.4	52.5°	24.1
0.3	0.8	1.4	1.9	2.5	2.8	2.9	3.1	3.2	3.4	3.9	55°	20.5
1.3	1.7	2.2	2.7	2.9	3.1	3.3	3.5	3.8	4.0	4.5	57.5°	18.5
2.3	2.7	2.9	3.2	3.4	3.7	3.9	4.1	4.4	4.7	5.0	60°	16.7
3.4	3.6	3.8	4.0	4.2	4.4	4.6	4.8	5.1	5.3	5.5	62.5°	14.8
5.2	5.4	5.5	5.7	5.8	6.0	6.1	6.3	6.5	6.7	6.8	65°	12.9
8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	67.5°	12.9
											70°	13.0
											72.5°	13.0
											75°	13.1
											77.5°	11.8
											80°	10.6
											82.5°	9.3
											85°	8.0
											87.5°	6.7
											90°	5.3
											92.5°	6.7
											95°	8.0
											97.5°	14.1
											100°	20.0
											102.5°	25.5
											105°	30.8
											107.5°	27.3
											110°	24.0

'167652  
 REV2XX35-WALL-0DEGREES

REPORT NUMBER: P167652  
 CATALOG NUMBER: REV2XX35

**TION (continued):**

**CANDELA DISTRIBUTION (con**

277.5°	280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°		275°	277.5°
119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	112.5°	20.6	35.0
121.6	123.5	125.4	127.3	129.2	131.1	132.9	134.8	136.6	138.4	115°	17.6	29.7
123.0	126.7	130.4	134.1	137.8	141.5	145.1	148.7	152.3	155.8	117.5°	15.0	23.9
118.9	124.0	129.1	134.4	139.6	145.2	152.1	158.9	165.7	172.3	120°	12.6	18.4
113.4	119.5	125.6	132.4	141.8	151.2	160.6	169.8	178.9	188.3	122.5°	10.1	13.4
106.8	113.4	121.9	134.0	146.0	158.0	169.8	185.2	205.0	225.6	125°	8.0	9.1
99.0	106.6	121.4	136.1	150.8	165.5	181.4	198.6	217.3	239.5	127.5°	7.3	8.3
95.7	108.4	123.8	139.4	154.8	169.1	183.5	198.1	247.5	312.0	130°	6.7	7.4
93.2	108.6	124.3	140.1	155.2	170.5	187.3	251.3	317.1	384.8	132.5°	6.0	6.5
91.8	106.9	122.2	137.8	153.5	170.6	231.9	295.6	380.6	542.0	135°	5.3	5.6
88.9	103.0	117.8	133.6	149.8	197.7	255.8	342.8	496.8	658.5	137.5°	4.6	4.7
85.2	98.7	113.0	128.1	158.2	208.8	275.4	413.5	558.0	692.4	140°	4.0	3.9
80.5	93.3	106.4	121.0	162.6	208.9	336.3	477.9	601.0	720.5	142.5°	3.3	3.3
74.8	86.2	97.7	118.7	156.1	240.7	380.7	507.7	622.7	737.1	145°	2.7	2.7
68.2	77.6	87.0	109.4	140.3	269.5	403.8	510.9	620.4	727.1	147.5°	2.7	2.7
61.7	69.9	78.8	100.8	160.7	287.8	396.2	501.1	592.6	691.5	150°	2.7	2.7
54.6	62.2	73.9	94.7	180.8	294.2	397.9	493.8	582.5	646.8	152.5°	2.6	2.7
47.0	54.1	67.5	89.8	183.8	288.8	400.1	491.2	568.8	628.2	155°	2.7	2.7
39.1	45.6	59.7	94.1	170.6	282.7	390.5	486.0	544.6	589.6	157.5°	3.2	3.4
35.2	41.0	54.6	92.7	161.2	275.8	378.6	460.6	517.4	543.0	160°	3.6	4.0
31.7	37.6	49.9	88.2	158.2	259.1	356.3	423.8	469.0	495.6	162.5°	3.9	4.5
28.0	34.0	44.2	77.2	144.2	233.2	325.4	386.3	421.8	450.3	165°	4.0	4.7
24.1	29.7	38.6	60.1	119.9	202.8	284.4	344.5	375.4	404.0	167.5°	4.5	5.1
22.3	27.7	36.1	52.2	100.7	175.7	245.5	296.4	328.4	357.2	170°	4.9	5.4
20.6	26.0	34.4	52.0	91.4	156.6	214.6	254.9	283.6	311.4	172.5°	5.4	5.7
19.0	24.2	32.0	47.8	79.2	129.1	178.8	213.2	238.4	265.7	175°	5.8	6.0
17.3	22.3	29.0	39.9	60.8	96.1	137.3	170.8	191.4	217.9	177.5°	6.9	7.0
16.9	21.7	27.6	35.4	49.7	74.1	104.2	129.0	143.3	168.3	180°	8.0	8.0
16.6	21.4	26.6	33.0	45.2	66.5	91.0	109.6	122.4	139.5			
16.2	21.0	25.3	30.1	39.5	57.0	75.8	89.3	100.2	113.9			
15.8	20.6	23.8	26.8	32.7	46.1	58.9	68.5	76.5	85.9			
13.9	18.9	22.4	25.6	31.4	42.0	50.0	55.6	59.0	61.9			
12.0	17.1	21.1	25.0	32.3	41.7	47.9	52.6	54.9	57.0			
10.1	15.4	19.8	24.5	33.3	41.0	45.5	49.3	50.6	52.0			
8.0	13.4	18.7	24.0	34.5	40.1	43.0	45.9	46.3	46.7			
9.3	14.6	18.6	29.1	40.9	39.9	41.4	42.9	42.9	43.0			
10.6	16.0	18.6	34.6	47.9	39.9	39.9	39.9	39.9	39.9			
13.3	18.7	33.6	64.9	68.8	51.2	41.4	38.5	36.9	36.8			
16.0	21.3	48.3	93.1	87.3	60.7	42.3	37.1	34.2	34.0			
25.5	34.5	56.2	89.2	82.3	58.2	41.4	35.2	32.1	31.7			
33.9	46.6	64.6	86.8	77.6	55.2	40.0	33.4	30.1	29.4			
43.0	58.7	73.2	85.2	73.4	52.4	38.5	31.6	28.1	27.1			
50.8	68.8	79.5	82.0	67.8	48.6	36.1	29.5	26.4	25.5			
45.5	61.5	70.5	69.1	56.7	42.0	32.3	26.9	24.4	24.0			
40.2	54.3	61.7	57.1	45.3	34.6	28.1	24.2	21.9	22.5			

REPORT NUMBER: P167652

CATALOG NUMBER: REV2XX35-WALL-0D

5-WALL-0DEGREES

tinued):

CANDELA DISTRIBUTION (continued):

280°	282.5°	285°	287.5°	290°	292.5°	295°	297.5°	300°		302.5°	305°	307.5°
47.3	53.2	46.2	33.5	25.8	23.1	21.3	18.9	21.2	0°	119.8	119.8	119.8
40.2	44.8	37.8	25.4	20.6	20.8	20.7	18.8	20.0	2.5°	140.1	141.8	143.5
31.9	35.4	32.0	22.7	19.2	20.1	20.0	19.0	19.2	5°	159.7	163.6	167.3
23.9	26.2	24.9	19.3	17.9	19.0	19.3	18.9	18.7	7.5°	178.9	185.3	191.6
16.5	17.2	16.5	15.3	15.9	17.5	18.6	18.6	18.6	10°	207.2	227.4	248.0
10.5	10.4	10.4	12.2	14.2	16.2	18.0	18.5	18.6	12.5°	247.2	269.9	303.1
9.8	9.8	9.7	11.0	13.0	14.9	16.8	18.0	18.6	15°	309.8	393.2	481.7
9.2	9.1	9.0	9.8	11.7	13.5	15.4	17.0	18.6	17.5°	381.1	472.0	622.1
8.4	8.5	8.4	8.6	10.4	12.2	14.0	16.0	17.7	20°	527.1	691.8	860.4
7.4	7.8	7.8	8.0	9.6	11.4	13.2	15.0	16.7	22.5°	709.3	873.2	1008.1
6.4	7.2	7.1	7.7	8.9	10.6	12.3	14.0	15.7	25°	803.1	941.2	1096.2
5.4	6.5	6.4	7.1	8.2	9.8	11.4	13.0	14.6	27.5°	828.4	966.1	1100.2
4.4	5.8	5.7	6.2	7.5	9.0	10.7	12.3	14.3	30°	838.2	955.1	1080.5
3.4	4.9	5.4	5.7	7.2	8.7	10.3	12.0	14.1	32.5°	850.7	958.0	1051.4
3.1	4.4	5.5	6.0	7.1	8.5	10.0	11.5	13.3	35°	829.7	918.8	1002.4
2.7	4.0	5.3	6.1	7.0	8.3	9.6	11.0	12.3	37.5°	773.4	851.2	913.6
2.7	3.5	4.6	5.7	6.8	8.0	9.2	10.5	12.0	40°	704.0	749.2	807.0
2.8	3.1	4.3	5.6	6.9	8.1	9.4	10.6	11.9	42.5°	662.5	692.4	719.7
3.4	3.5	4.5	5.9	7.3	8.5	9.6	10.7	11.9	45°	618.4	646.6	681.1
4.1	4.1	4.3	5.7	7.2	8.8	9.8	10.8	11.8	47.5°	571.4	601.0	654.9
4.7	4.8	4.8	5.2	6.7	8.2	9.7	10.8	11.7	50°	524.2	574.4	630.7
5.4	5.4	5.5	5.6	5.9	7.3	8.7	10.1	11.6	52.5°	482.8	543.0	588.3
5.7	6.1	6.3	6.5	6.8	7.1	7.8	9.0	10.1	55°	444.7	493.6	532.6
5.9	6.4	6.8	7.1	7.4	7.7	8.0	8.3	8.7	57.5°	397.4	434.8	478.4
6.1	6.4	6.8	7.2	7.5	7.8	8.1	8.4	8.7	60°	343.6	373.1	424.8
6.2	6.5	6.8	7.0	7.3	7.6	7.8	8.1	8.3	62.5°	295.5	329.8	379.5
7.1	7.3	7.4	7.5	7.6	7.8	7.9	8.0	8.2	65°	247.2	287.1	338.3
8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	67.5°	198.5	241.8	292.1
									70°	163.4	200.5	243.2
									72.5°	135.1	167.6	207.6
									75°	103.5	131.5	167.4
									77.5°	71.9	92.5	122.7
									80°	65.7	81.5	101.0
									82.5°	58.4	70.3	83.5
									85°	50.4	57.7	64.1
									87.5°	44.6	49.1	52.0
									90°	39.9	42.6	45.3
									92.5°	36.8	37.7	41.9
									95°	33.9	33.7	38.2
									97.5°	31.5	31.3	34.6
									100°	29.2	28.9	31.0
									102.5°	26.8	26.5	27.9
									105°	25.2	25.4	26.3
									107.5°	23.7	23.9	25.0
									110°	22.2	22.0	24.0



REPORT NUMBER: P167652

CATALOG NUMBER: REV2XX35-WALL-0DEGREES

DEGREES

**CANDELA DISTRIBUTION (continued):**

310°	312.5°	315°	317.5°	320°	322.5°	325°	327.5°		302.5°	305°	307.5°	310°
119.8	119.8	119.8	119.8	119.8	119.8	119.8	119.8	112.5°	21.5	21.4	22.7	23.6
145.1	146.7	148.3	149.8	151.2	152.6	153.9	155.2	115°	21.6	21.9	21.8	22.7
170.9	174.4	177.8	181.0	184.1	187.0	189.7	192.3	117.5°	20.9	22.8	21.3	21.5
197.7	206.3	222.9	240.0	255.4	271.1	286.7	302.1	120°	19.2	23.5	22.0	21.6
269.1	290.6	312.4	334.6	382.4	455.0	527.2	599.0	122.5°	18.6	21.2	22.4	21.5
386.9	473.3	562.1	653.3	746.7	842.1	938.1	1030.8	125°	18.6	19.4	22.2	21.5
575.6	679.5	811.3	939.4	1063.5	1183.3	1298.7	1400.2	127.5°	18.6	18.6	20.2	21.3
784.2	942.4	1096.5	1222.1	1326.5	1426.6	1522.2	1613.1	130°	18.6	18.7	19.3	20.9
1019.4	1149.7	1277.9	1402.1	1515.5	1612.9	1706.3	1795.6	132.5°	18.6	18.6	19.4	20.4
1146.7	1291.5	1414.6	1542.0	1669.0	1770.3	1847.7	1920.7	135°	18.4	18.6	19.0	20.3
1216.7	1350.6	1488.1	1602.7	1715.8	1831.7	1932.3	1966.5	137.5°	17.3	18.6	18.6	19.4
1239.3	1359.6	1475.9	1603.4	1683.5	1766.3	1849.5	1923.3	140°	16.2	18.0	19.5	20.8
1194.9	1314.7	1412.3	1501.3	1590.4	1663.3	1735.7	1807.5	142.5°	16.5	18.6	20.1	21.6
1144.3	1217.4	1309.9	1392.4	1471.5	1547.3	1621.7	1688.2	145°	16.4	18.8	20.9	22.0
1071.6	1143.4	1210.1	1281.5	1349.6	1422.3	1493.5	1565.7	147.5°	15.6	18.1	20.8	23.2
978.4	1042.4	1108.7	1172.5	1234.6	1291.4	1360.9	1438.8	150°	14.2	16.7	19.6	23.1
866.4	932.3	1000.1	1066.1	1127.9	1185.6	1242.4	1317.3	152.5°	13.6	15.7	18.9	22.3
754.7	823.5	897.7	968.8	1028.9	1088.3	1162.3	1241.8	155°	13.4	15.1	17.1	20.1
726.0	768.9	814.7	870.3	934.7	1008.0	1087.1	1170.8	157.5°	13.0	14.3	16.0	17.8
700.5	742.9	777.9	812.1	847.2	924.3	1009.4	1086.5	160°	12.8	13.9	14.9	16.1
668.5	707.4	745.9	787.3	827.6	869.9	922.1	996.6	162.5°	12.6	13.6	14.4	15.3
632.3	675.2	723.2	768.2	812.6	847.9	880.9	907.2	165°	12.4	13.1	13.9	14.7
582.0	640.1	701.9	749.6	787.9	822.3	850.3	871.9	167.5°	11.2	12.4	13.4	14.0
532.9	597.6	657.3	712.5	760.3	791.9	814.4	833.8	170°	9.6	10.5	11.3	12.2
486.7	551.0	612.2	669.7	716.6	752.8	776.7	795.4	172.5°	9.0	9.3	9.7	10.0
441.2	503.2	568.7	628.3	677.9	715.7	742.6	770.3	175°	8.6	8.8	9.0	9.2
397.1	459.2	526.8	589.2	644.3	685.7	718.3	753.7	177.5°	8.3	8.4	8.5	8.7
350.1	413.5	479.3	542.8	604.1	655.9	700.8	737.4	180°	8.0	8.0	8.0	8.0
300.4	364.1	430.3	494.3	554.8	610.1	663.0	717.2					
257.9	316.7	383.4	444.1	507.4	563.2	614.8	651.3					
213.3	270.4	331.9	394.1	456.6	513.1	562.6	589.1					
165.0	219.5	279.6	340.6	400.8	455.8	500.8	530.9					
131.8	175.6	229.0	285.1	343.2	396.0	440.6	475.5					
104.6	138.3	185.7	238.5	293.6	340.6	384.7	421.8					
73.7	96.8	138.9	188.8	241.7	285.5	329.4	367.1					
54.9	66.8	98.5	141.1	189.6	230.3	273.6	312.5					
47.9	50.6	66.5	95.8	135.8	175.7	215.6	255.5					
44.4	48.8	55.3	72.2	98.5	127.6	160.0	196.2					
40.8	45.6	48.7	59.0	77.7	98.5	122.0	146.9					
37.1	41.5	45.4	52.5	65.1	77.1	89.8	101.9					
33.3	37.2	41.7	46.4	54.0	61.9	70.5	81.0					
30.1	33.9	38.8	43.1	49.3	56.6	62.4	69.7					
27.9	31.3	36.6	39.9	44.7	51.6	55.5	61.3					
25.7	27.9	34.9	37.0	41.4	47.1	51.5	55.8					
24.0	26.0	31.5	35.7	39.5	44.0	47.4	51.1					



REPORT NUMBER: P167652

CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (continued):**

312.5°	315°	317.5°	320°	322.5°	325°	327.5°		330°	332.5°	335°	337.5°	340°
25.2	28.7	33.6	37.4	41.8	44.6	48.8	0°	119.8	119.8	119.8	119.8	119.8
24.3	26.4	30.8	35.1	39.4	43.3	46.6	2.5°	156.4	157.5	158.6	159.6	160.5
23.3	25.8	28.8	32.6	36.7	40.7	44.5	5°	194.8	197.0	199.1	201.0	202.8
23.0	25.4	27.7	30.6	33.8	37.9	43.8	7.5°	317.3	332.1	346.7	360.7	374.3
22.7	24.9	27.2	29.5	32.3	36.9	42.3	10°	671.3	734.0	794.3	850.9	903.7
22.3	24.3	26.5	29.1	32.2	35.8	40.5	12.5°	1119.6	1204.3	1284.7	1355.4	1408.1
21.9	23.9	25.8	27.9	31.0	34.7	38.8	15°	1476.3	1548.6	1617.2	1681.9	1742.9
22.2	24.1	25.4	27.0	29.0	33.6	40.2	17.5°	1697.0	1769.4	1838.2	1903.5	1965.1
21.3	23.5	25.9	26.6	30.2	35.1	41.1	20°	1880.6	1953.7	2010.6	2064.3	2114.9
21.1	21.3	26.2	31.4	33.8	36.8	42.1	22.5°	1989.5	2054.0	2087.7	2103.3	2114.9
22.2	24.5	27.2	32.7	39.1	41.3	43.3	25°	1992.1	2009.7	2019.5	2017.8	2013.1
23.1	26.3	29.4	33.0	38.0	44.1	49.6	27.5°	1966.0	1965.2	1958.4	1951.0	1947.9
23.7	26.5	29.8	33.5	37.5	42.2	48.3	30°	1876.1	1941.1	1936.4	1933.2	1931.8
23.2	25.9	29.0	32.7	36.7	40.9	45.3	32.5°	1760.4	1834.4	1915.9	1914.2	1913.5
23.9	25.4	28.7	31.8	34.9	38.8	42.8	35°	1641.6	1719.9	1800.3	1883.0	1884.1
27.0	29.2	30.9	32.7	35.3	37.6	39.6	37.5°	1518.8	1602.3	1688.9	1772.8	1840.2
26.0	29.9	34.5	36.1	37.8	39.6	41.5	40°	1412.9	1504.2	1583.9	1653.7	1716.2
23.5	27.2	31.1	35.1	39.3	42.6	44.4	42.5°	1326.0	1410.7	1481.9	1542.4	1602.0
19.7	23.0	26.5	30.0	33.4	36.8	40.2	45°	1252.5	1318.7	1380.5	1433.9	1498.0
17.8	19.6	21.4	23.6	26.5	29.3	31.9	47.5°	1157.4	1207.5	1245.5	1301.6	1368.4
16.2	17.0	18.3	19.9	21.5	23.1	24.8	50°	1050.2	1090.7	1114.3	1139.9	1218.6
15.4	16.2	16.9	17.6	18.3	19.0	19.9	52.5°	957.6	991.0	1022.0	1055.3	1095.1
14.7	15.3	15.9	16.5	17.1	17.7	18.2	55°	891.6	919.3	947.7	971.4	1001.3
13.1	13.9	14.7	15.4	15.8	16.3	16.7	57.5°	848.7	850.3	855.7	881.4	909.7
10.4	11.1	11.7	12.2	12.7	13.2	13.7	60°	810.4	808.8	790.7	804.3	841.3
9.4	9.5	9.7	9.8	9.9	10.1	10.2	62.5°	794.6	794.4	785.8	789.4	815.6
8.8	8.9	9.0	9.1	9.3	9.4	9.5	65°	782.9	792.3	782.8	791.4	799.3
8.0	8.0	8.0	8.0	8.0	8.0	8.0	67.5°	759.0	759.1	767.4	772.3	772.2
							70°	724.4	721.4	728.6	742.6	743.5
							72.5°	667.1	675.1	688.6	712.0	726.2
							75°	607.0	623.8	653.6	699.1	717.5
							77.5°	553.8	573.9	607.6	654.5	695.4
							80°	502.4	527.0	560.0	609.0	653.0
							82.5°	452.2	477.0	508.1	552.5	598.0
							85°	399.9	423.3	451.1	491.1	536.6
							87.5°	346.0	368.2	392.0	423.2	460.8
							90°	290.1	314.1	335.4	354.0	383.3
							92.5°	226.4	252.9	278.0	300.2	314.6
							95°	170.6	196.0	220.5	242.2	256.9
							97.5°	116.0	141.5	168.3	190.6	207.9
							100°	93.7	110.2	127.7	143.6	163.5
							102.5°	75.8	84.3	100.0	117.9	132.6
							105°	66.4	73.3	83.8	96.3	113.2
							107.5°	59.8	63.1	76.1	94.8	108.0
							110°	55.8	65.0	79.9	97.9	113.2



REPORT NUMBER: P167652

CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (continued):**

342.5°	345°	347.5°	350°	352.5°	355°		330°	332.5°	335°	337.5°	340°	342.5°
119.8	119.8	119.8	119.8	119.8	119.8	112.5°	55.0	63.4	79.2	99.8	119.3	135.7
161.3	163.6	163.9	164.1	164.3	164.5	115°	52.5	60.9	77.2	99.5	120.3	136.7
204.4	205.7	206.9	209.4	209.6	209.8	117.5°	50.7	61.7	76.3	94.6	114.2	131.8
387.2	399.4	410.9	421.4	436.8	442.0	120°	51.3	60.6	73.0	87.8	102.2	117.4
952.6	997.2	1037.4	1073.1	1128.0	1140.6	122.5°	49.6	58.4	69.3	82.4	96.0	107.7
1455.1	1496.6	1532.5	1563.0	1588.3	1617.9	125°	45.6	55.6	66.2	77.7	89.8	101.1
1780.4	1800.8	1815.9	1826.2	1832.1	1839.4	127.5°	46.1	54.0	63.5	72.8	83.4	94.4
2023.0	2063.2	2083.1	2100.4	2114.8	2134.1	130°	46.9	53.9	61.9	70.8	80.5	89.8
2162.4	2206.9	2231.3	2239.8	2246.1	2253.9	132.5°	47.5	54.0	60.8	69.9	79.3	88.4
2123.2	2129.1	2133.3	2122.7	2112.8	2100.2	135°	47.8	54.1	62.3	70.6	79.0	87.6
2005.8	1996.7	1986.5	1972.5	1952.3	1934.0	137.5°	48.3	55.9	63.3	71.1	78.9	86.8
1945.8	1944.6	1944.2	1944.5	1914.2	1876.6	140°	53.4	58.5	65.2	72.1	78.9	85.0
1931.6	1932.5	1934.3	1937.0	1922.5	1890.0	142.5°	55.5	62.6	67.8	73.8	80.3	84.7
1914.6	1918.0	1923.5	1930.7	1931.7	1892.5	145°	49.9	56.3	63.6	71.3	76.9	80.7
1885.0	1887.3	1890.9	1895.8	1902.0	1881.5	147.5°	47.0	51.3	55.7	59.6	64.2	69.4
1833.3	1830.2	1832.3	1839.3	1850.3	1862.8	150°	43.2	46.8	51.0	54.7	58.2	61.4
1748.9	1753.5	1762.0	1774.0	1789.2	1810.9	152.5°	43.7	46.1	48.3	51.1	54.6	57.7
1662.6	1688.7	1704.7	1721.7	1739.9	1761.2	155°	46.8	50.0	53.8	56.1	58.3	60.3
1572.8	1640.2	1660.9	1692.4	1732.6	1778.5	157.5°	43.7	47.3	50.1	53.2	56.6	60.2
1449.0	1524.8	1551.1	1574.4	1612.0	1661.7	160°	34.5	37.1	40.0	42.9	45.6	48.3
1279.3	1324.7	1359.6	1397.6	1449.9	1514.9	162.5°	26.5	28.7	30.7	32.6	34.4	36.0
1135.4	1160.0	1204.1	1268.1	1338.0	1409.6	165°	21.2	22.5	23.8	25.0	26.2	27.0
1036.0	1077.6	1119.9	1168.7	1220.6	1272.5	167.5°	18.8	19.3	19.8	20.3	20.5	20.7
936.5	970.1	1006.0	1019.9	1021.4	1022.6	170°	17.2	17.5	17.8	18.0	18.2	18.3
863.8	882.6	886.5	881.1	874.9	869.9	172.5°	14.2	14.7	15.2	15.6	16.0	16.5
835.0	834.4	825.1	810.0	797.9	791.6	175°	10.3	10.3	10.4	10.4	10.5	10.5
799.5	790.7	777.4	763.3	749.9	744.6	177.5°	9.6	9.7	9.8	9.9	10.0	10.1
765.2	754.7	746.0	734.8	717.1	707.3	180°	8.0	8.0	8.0	8.0	8.0	8.0
739.8	728.7	724.2	715.5	701.1	686.3							
731.0	724.5	722.9	716.2	713.6	710.1							
725.0	727.6	730.9	738.1	741.8	743.1							
716.7	721.3	734.9	745.9	755.0	754.8							
681.5	704.0	716.3	728.2	742.4	737.7							
630.4	648.7	667.5	679.7	679.8	694.2							
570.4	588.4	593.2	594.8	609.8	612.3							
498.0	525.6	536.0	539.2	540.8	544.0							
420.6	455.2	484.5	500.4	511.1	519.1							
339.0	370.2	405.7	428.1	442.6	453.5							
273.0	295.2	321.8	340.4	356.9	368.5							
222.6	237.8	256.0	274.8	291.6	301.3							
180.8	187.3	204.6	221.9	231.2	235.2							
144.9	155.0	162.6	174.5	179.4	183.0							
123.0	130.4	138.1	143.1	147.8	150.5							
116.8	127.4	133.1	140.3	148.3	153.6							
127.1	139.3	146.6	157.2	164.6	173.3							

REPORT NUMBER: P167652  
 CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (continued):**

345°	347.5°	350°	352.5°	355°		357.5°	360°
146.9	156.4	166.7	176.9	186.4	0°	119.8	119.8
148.6	159.3	169.3	180.2	188.5	2.5°	164.8	165.0
145.8	157.0	165.0	174.4	183.0	5°	210.1	210.3
133.7	142.7	150.1	159.0	166.8	7.5°	447.2	452.5
116.5	125.9	133.8	140.7	146.9	10°	1153.2	1165.9
110.5	118.4	125.2	130.6	135.4	12.5°	1626.1	1634.4
104.2	112.8	119.5	125.2	130.5	15°	1834.0	1828.7
98.9	107.7	114.5	120.6	126.0	17.5°	2135.8	2137.5
97.1	104.3	110.9	117.4	123.7	20°	2252.9	2251.9
95.5	101.6	107.6	113.6	119.3	22.5°	2100.2	2100.2
92.9	98.6	104.2	109.6	114.3	25°	1916.5	1905.9
90.2	95.5	100.6	105.6	109.1	27.5°	1836.8	1799.4
89.0	93.3	97.6	101.9	103.7	30°	1858.3	1826.0
85.0	89.5	94.2	98.9	101.2	32.5°	1852.5	1812.7
74.1	78.5	82.5	85.9	87.8	35°	1859.9	1839.4
64.4	67.2	69.8	71.3	71.6	37.5°	1879.5	1897.9
60.6	63.3	65.8	66.4	66.5	40°	1840.5	1874.0
62.2	64.1	65.6	66.3	67.1	42.5°	1790.5	1823.4
64.0	68.0	70.7	73.3	76.6	45°	1807.4	1834.0
50.9	52.5	53.2	53.6	54.2	47.5°	1654.9	1647.7
37.3	38.1	38.7	39.2	39.9	50°	1540.9	1559.9
27.6	28.1	28.6	28.9	29.3	52.5°	1453.2	1482.7
20.8	21.0	21.1	21.2	21.3	55°	1303.2	1320.3
18.4	18.5	18.5	18.6	18.6	57.5°	1013.2	1019.5
16.9	17.2	17.6	18.1	18.3	60°	860.5	865.1
10.6	10.6	10.6	10.6	10.6	62.5°	788.6	790.6
10.3	10.3	10.4	10.4	10.5	65°	744.3	742.7
8.0	8.0	8.0	8.0	8.0	67.5°	706.5	705.4
					70°	677.1	665.5
					72.5°	701.7	686.8
					75°	741.4	729.4
					77.5°	757.4	750.6
					80°	747.7	753.3
					82.5°	701.2	708.1
					85°	620.8	630.9
					87.5°	550.5	556.3
					90°	521.7	519.1
					92.5°	468.0	463.2
					95°	377.4	372.7
					97.5°	309.7	308.8
					100°	245.2	242.2
					102.5°	188.0	189.0
					105°	148.1	143.7
					107.5°	158.2	157.1
					110°	181.6	181.0

REPORT NUMBER: P167652  
CATALOG NUMBER: REV2XX35-WALL-0DEGREES

**CANDELA DISTRIBUTION (continued):**

	357.5°	360°
112.5°	195.4	197.0
115°	196.3	197.0
117.5°	190.9	191.7
120°	173.0	173.0
122.5°	151.7	151.7
125°	139.2	141.1
127.5°	134.0	135.8
130°	128.9	130.4
132.5°	126.3	127.8
135°	121.1	122.4
137.5°	115.9	117.1
140°	110.7	111.8
142.5°	103.8	103.8
145°	102.9	103.8
147.5°	89.6	90.5
150°	71.9	71.9
152.5°	66.5	66.5
155°	68.0	69.2
157.5°	78.2	79.9
160°	53.7	53.2
162.5°	39.9	39.9
165°	29.3	29.3
167.5°	21.3	21.3
170°	18.6	18.6
172.5°	18.4	18.6
175°	10.6	10.6
177.5°	10.5	10.6
180°	8.0	8.0

(END OF REPORT)