

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: LUMIERE

Report Number: P247024

Luminaire Tested: **203-SS-8LED2725-12-CS-LVR**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P247024  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-42)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 203-SS-8LED2725-12-CS-LVR  
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 2700K CCT, 25 DEGREE NARROW OPTIC, REGRESSED HOOD SILVER, HEX CELL LOUVER  
Light Source: (1) SORAA 2700K 90 CRI LED  
SM16-07-25D-927-03  
Ballast/Driver: (1) CHROMA POWER SUPPLY IN0004

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 231.2 lumens  
Efficiency: N/A  
Efficacy: 32.1 lumens/watt  
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.3  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P247024  
CATALOG NUMBER: 203-SS-8LED2725-12-CS-LVR

### Luminous Intensity Polar Plot

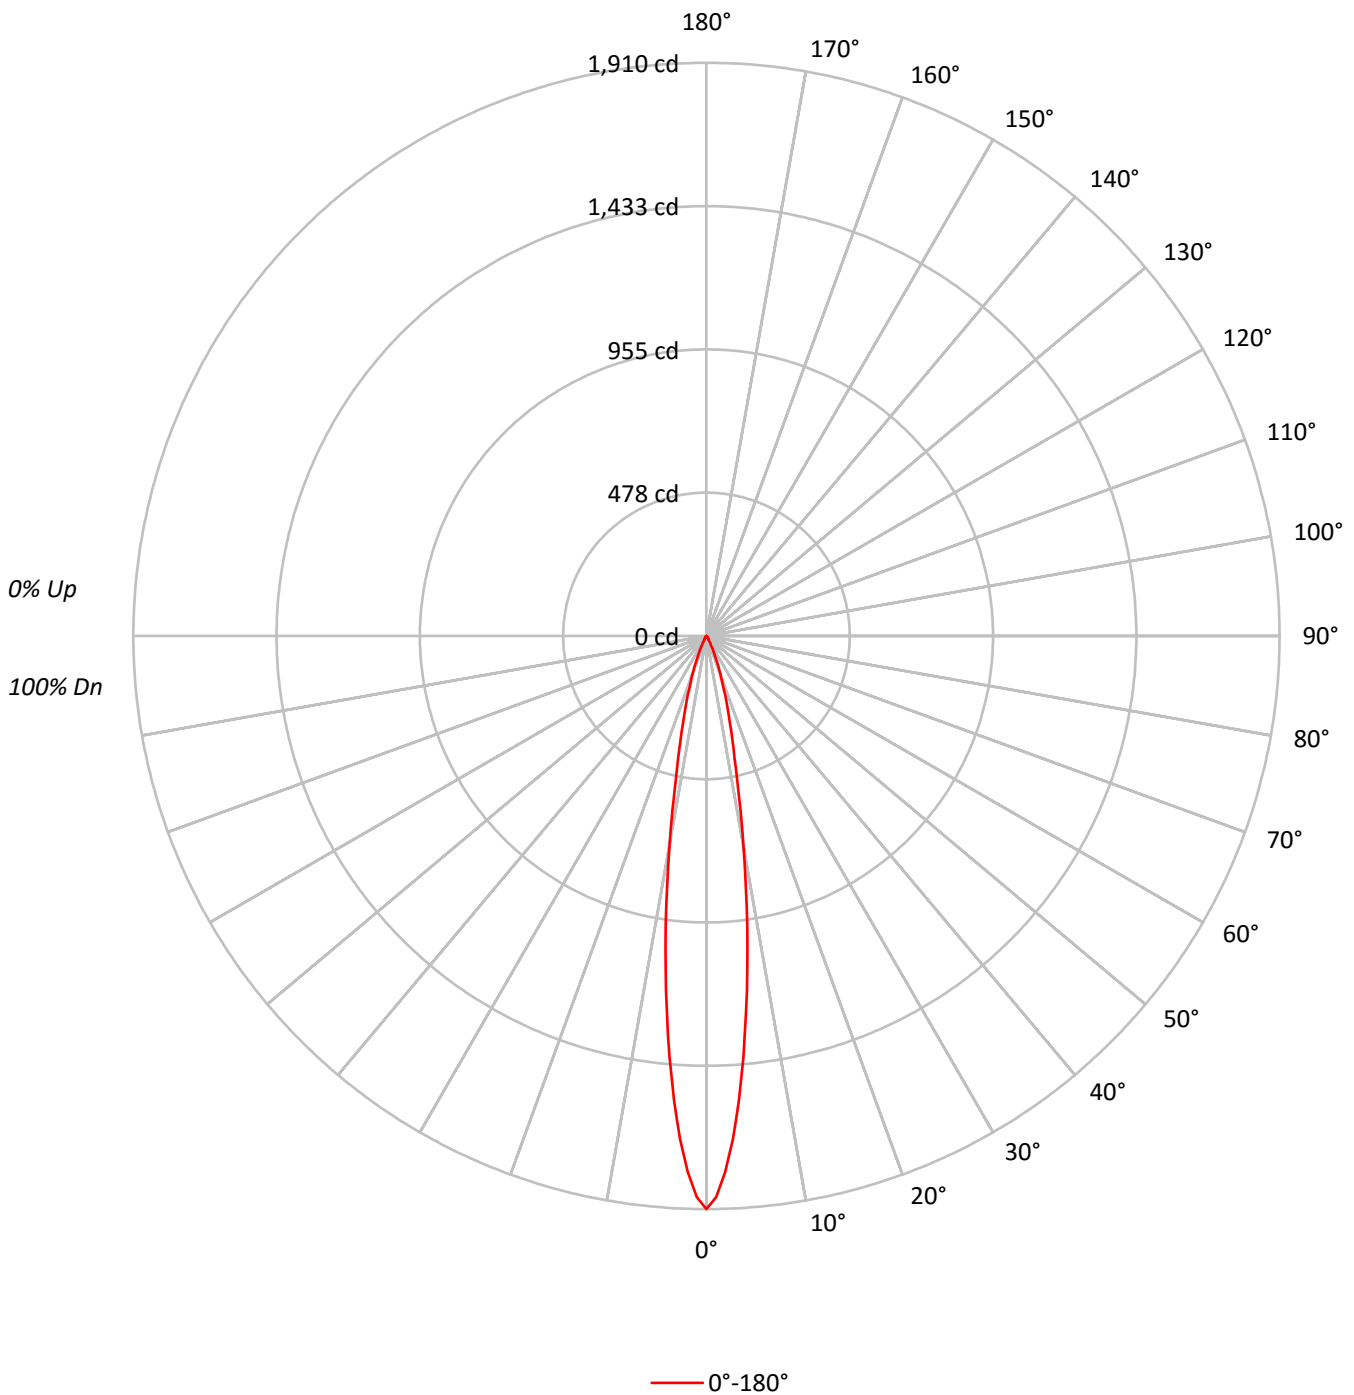



TEST NUMBER: P247024

CATALOG NUMBER: 203-SS-8LED2725-12-CS-LVR

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97
2	112	109	106	104	110	107	105	103	104	102	100	101	100	98	99	97	96	95
3	109	105	102	99	107	104	101	98	101	99	97	99	97	95	97	95	94	93
4	106	101	98	95	105	100	97	95	98	96	94	97	94	92	95	93	91	90
5	104	98	95	92	102	97	94	92	96	93	91	94	92	90	93	91	89	88
6	101	96	92	89	100	95	91	89	94	91	88	92	90	88	91	89	87	86
7	99	93	89	87	98	93	89	87	91	88	86	90	88	86	90	87	85	84
8	97	91	87	85	96	90	87	85	89	86	84	89	86	84	88	85	84	83
9	95	89	85	83	94	88	85	83	88	85	82	87	84	82	86	84	82	81
10	93	87	83	81	92	86	83	81	86	83	81	85	82	81	85	82	80	80

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	942256
5°	697629
10°	355353
15°	154819
20°	70461
25°	26348
30°	7805
35°	3855
40°	2383
45°	1256
50°	691
55°	774
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P247024

CATALOG NUMBER: 203-SS-8LED2725-12-CS-LVR

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	111.3	48.1
10°-20°	88.7	38.4
20°-30°	24.7	10.7
30°-40°	4.5	2.0
40°-50°	1.5	0.6
50°-60°	0.5	0.2
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	224.7	97.2
0°-40°	229.2	99.2
0°-60°	231.2	100.0
0°-90°	231.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	231.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1910	
5°	1409	111
15°	303	89
25°	48	25
35°	6	5
45°	2	1
55°	1	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P247024

CATALOG NUMBER: 203-SS-8LED2725-12-CS-LVR

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1909.8
1°	1869.6
2°	1787.4
3°	1679.7
4°	1550.1
5°	1408.6
6°	1261.6
7°	1116.5
8°	974.0
9°	836.2
10°	709.3
11°	593.4
12°	496.6
13°	417.2
14°	353.3
15°	303.1
16°	260.2
17°	222.7
18°	189.0
19°	159.8
20°	134.2
22.5°	82.2
25°	48.4
26°	36.5
27°	29.2
28°	21.9
29°	17.3
30°	13.7
32.5°	10.0
35°	6.4
37.5°	4.6
40°	3.7
42.5°	2.7
45°	1.8
47.5°	0.9
50°	0.9
52.5°	0.9
55°	0.9
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0



TEST NUMBER: P247024

CATALOG NUMBER: 203-SS-8LED2725-12-CS-LVR

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)