

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: LUMIERE

Report Number: P246967

Luminaire Tested: **203-SS-8LED3010-12-BK-LVR**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P246967  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-26)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 203-SS-8LED3010-12-BK-LVR  
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 3000K CCT, 10 DEGREE SPOT OPTIC,  
REGRESSED HOOD BLACK, HEX CELL LOUVER  
Light Source: (1) SORAA 3000K 95 CRI 10°NSP LED  
SM16-07-10D-930-03  
Ballast/Driver: CHROMA POWER SUPPLY IN0004

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 208.7 lumens  
Efficiency: N/A  
Efficacy: 26.1 lumens/watt  
Spacing Criteria (0/90/45): 0.21 / 0.21 / 0.19  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P246967  
CATALOG NUMBER: 203-SS-8LED3010-12-BK-LVR

### Luminous Intensity Polar Plot

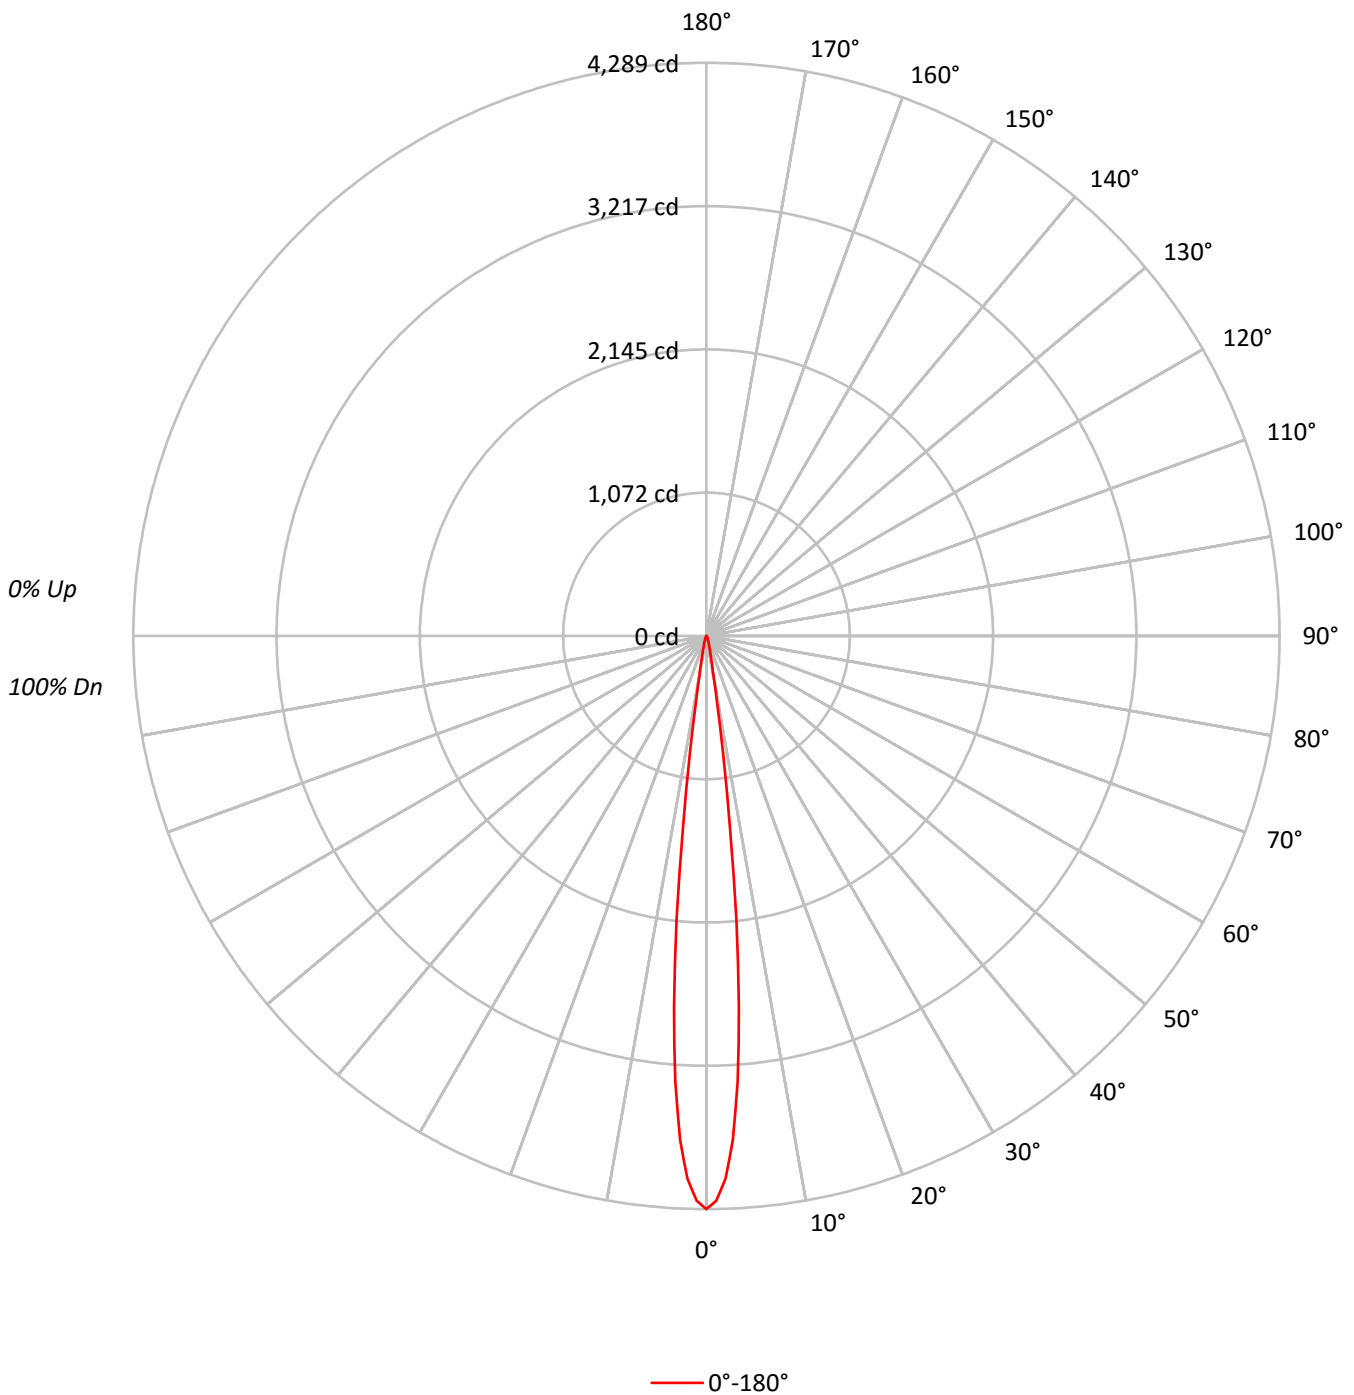



TEST NUMBER: P246967

CATALOG NUMBER: 203-SS-8LED3010-12-BK-LVR

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	115	113	112	114	112	111	110	108	108	107	105	104	103	102	101	101	99	99	99	99
2	114	111	109	107	112	109	107	106	106	105	103	104	102	101	101	100	99	98	98	98	98
3	111	108	105	103	110	107	104	103	104	103	101	102	101	99	100	99	98	97	97	97	97
4	109	106	103	101	108	105	102	100	103	101	99	101	99	98	100	98	97	96	96	96	96
5	108	104	101	99	107	103	100	98	101	99	98	100	98	97	99	97	96	95	95	95	95
6	106	102	99	97	105	101	99	97	100	98	96	99	97	96	98	96	95	94	94	94	94
7	105	101	98	96	104	100	97	96	99	97	95	98	96	95	97	96	94	94	94	94	94
8	104	99	97	95	103	99	96	95	98	96	94	97	95	94	97	95	94	93	93	93	93
9	102	98	96	94	102	98	95	94	97	95	93	97	95	93	96	94	93	92	92	92	92
10	101	97	95	93	101	97	94	93	96	94	93	96	94	92	95	94	92	92	92	92	92

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2116056
5°	1378617
10°	147442
15°	42089
20°	17694
25°	8220
30°	5070
35°	3192
40°	1739
45°	1256
50°	691
55°	774
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P246967

CATALOG NUMBER: 203-SS-8LED3010-12-BK-LVR

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	167.9	80.5
10°-20°	27.9	13.4
20°-30°	7.7	3.7
30°-40°	3.5	1.7
40°-50°	1.2	0.6
50°-60°	0.5	0.2
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	203.5	97.5
0°-40°	207.0	99.2
0°-60°	208.7	100.0
0°-90°	208.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	208.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4289	
5°	2784	168
15°	82	28
25°	15	8
35°	5	3
45°	2	1
55°	1	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P246967

CATALOG NUMBER: 203-SS-8LED3010-12-BK-LVR

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4288.9
1°	4226.8
2°	4063.7
3°	3775.6
4°	3340.3
5°	2783.6
6°	2132.9
7°	1451.2
8°	878.5
9°	493.8
10°	294.3
12.5°	137.4
15°	82.4
17.5°	55.0
20°	33.7
22.5°	21.3
25°	15.1
27.5°	11.5
30°	8.9
32.5°	7.1
35°	5.3
37.5°	4.4
40°	2.7
42.5°	1.8
45°	1.8
47.5°	0.9
50°	0.9
52.5°	0.9
55°	0.9
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)