

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: P220355

Luminaire Tested: **9002-W1-[RW, RI]-LED3590-F-BK-L1-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P220355
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29415)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 9002-W1-[RW, RI]-LED3590-F-BK-L1-UNV
Description: LUMIERE LANTERRA 9002 LED WALL LUMINAIRE, RECESSED LENS, FLOOD OPTIC, BLACK HOUSING.
Light Source: (1) 3500K CCT, 90 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 856.0 lumens
Efficiency: N/A
Efficacy: 85.6 lumens/watt
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.63
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P220355

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3590-F-BK-L1-UNV

Luminous Intensity Polar Plot

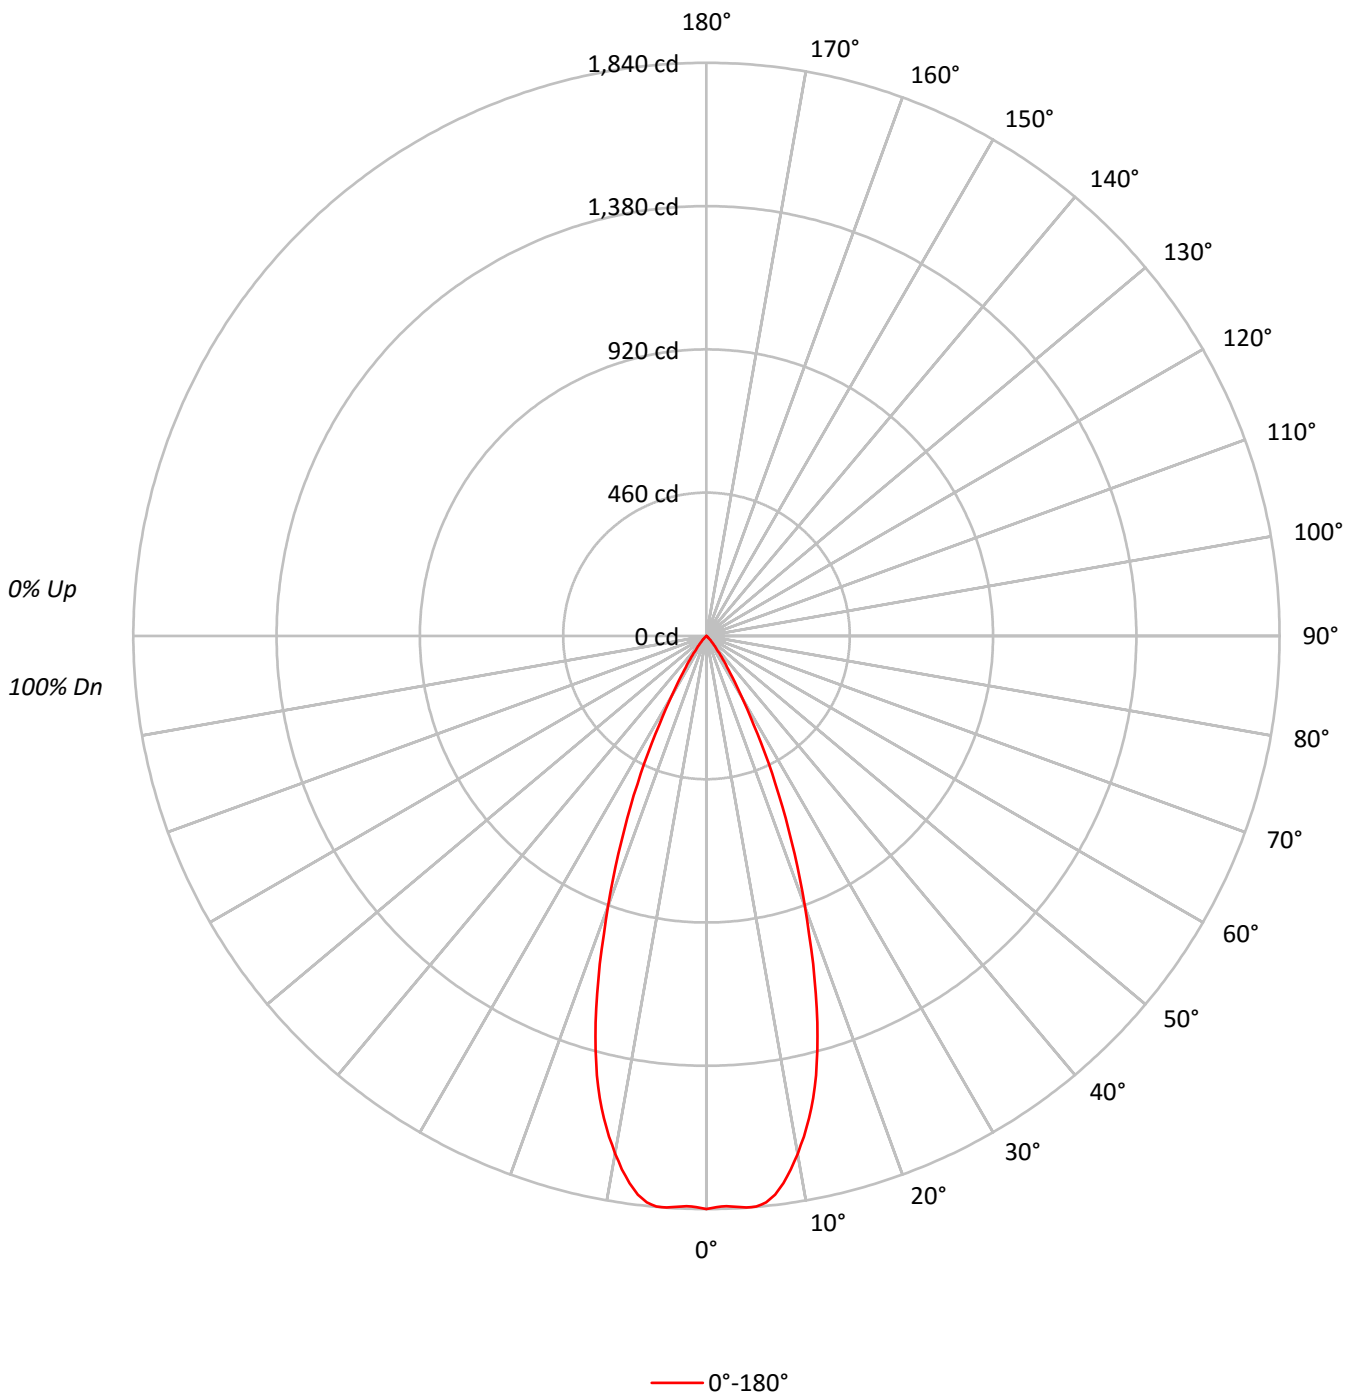



TEST NUMBER: P220355

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3590-F-BK-L1-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91
3	106	101	96	93	104	99	95	92	97	94	91	94	92	90	92	90	88	87
4	102	96	91	88	100	95	90	87	92	89	86	91	88	85	89	86	84	83
5	98	91	86	83	96	90	86	82	89	85	82	87	84	81	86	83	80	79
6	94	87	82	79	93	86	82	78	85	81	78	84	80	77	82	79	77	76
7	91	83	78	75	90	83	78	75	81	77	74	80	77	74	79	76	74	73
8	88	80	75	72	86	79	75	71	78	74	71	77	74	71	77	73	71	70
9	84	77	72	69	84	76	72	68	75	71	68	75	71	68	74	70	68	67
10	82	74	69	66	81	73	69	66	73	68	66	72	68	65	71	68	65	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	907720
5°	910741
10°	845572
15°	702788
20°	484353
25°	285638
30°	127671
35°	54388
40°	21834
45°	7885
50°	2686
55°	774
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P220355

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3590-F-BK-L1-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	170.8	20.0
10°-20°	370.4	43.3
20°-30°	240.1	28.0
30°-40°	63.0	7.4
40°-50°	10.6	1.2
50°-60°	1.2	0.1
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	781.3	91.3
0°-40°	844.3	98.6
0°-60°	856.0	100.0
0°-90°	856.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	856.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1840	
5°	1839	171
15°	1376	370
25°	525	240
35°	90	63
45°	11	11
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P220355

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3590-F-BK-L1-UNV

CANDELA DISTRIBUTION (FULL):

0°	
0°	1839.8
1°	1833.7
2°	1832.0
3°	1835.5
4°	1839.8
5°	1838.9
6°	1828.5
7°	1807.7
8°	1773.8
9°	1733.8
10°	1687.8
11°	1637.4
12°	1582.7
13°	1522.7
14°	1453.3
15°	1375.9
16°	1290.8
17°	1200.5
18°	1107.5
19°	1012.8
20°	922.5
22.5°	713.2
25°	524.7
26°	455.2
27°	385.7
28°	323.1
29°	269.3
30°	224.1
32.5°	140.7
35°	90.3
37.5°	55.6
40°	33.9
42.5°	20.0
45°	11.3
47.5°	6.1
50°	3.5
52.5°	1.7
55°	0.9
57.5°	0.9
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0



TEST NUMBER: P220355

CATALOG NUMBER: 9002-W1-[RW, RI]-LED3590-F-BK-L1-UNV

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)