

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: LUMIERE

Report Number: P220328

Luminaire Tested: **9002-W1-[RW, RI]-LED4097-F-WT-L1-UNV**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P220328  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29411)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 9002-W1-[RW, RI]-LED4097-F-WT-L1-UNV  
Description: LUMIERE LANTERRA 9002 LED WALL LUMINAIRE, RECESSED LENS, FLOOD OPTIC, WHITE HOUSING.  
Light Source: (1) 4000K CCT, 97 CRI LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 867.1 lumens  
Efficiency: N/A  
Efficacy: 86.7 lumens/watt  
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.63  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P220328

CATALOG NUMBER: 9002-W1-[RW, RI]-LED4097-F-WT-L1-UNV

### Luminous Intensity Polar Plot

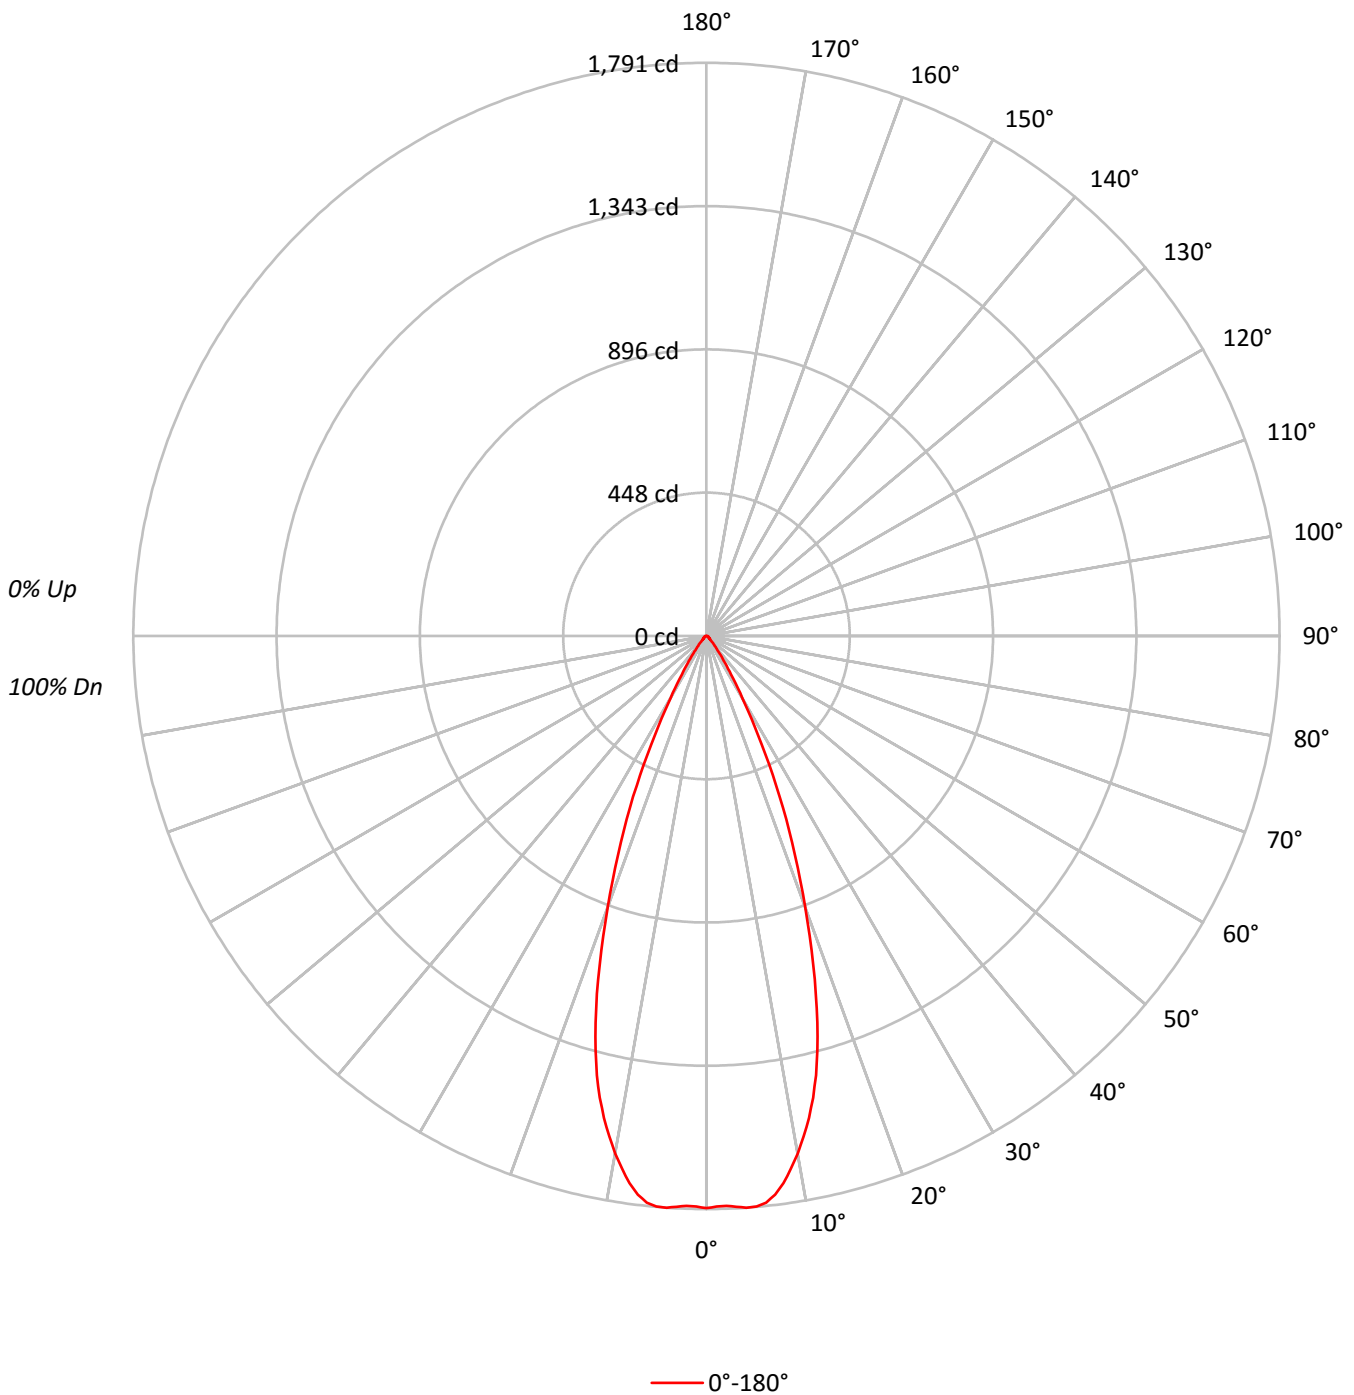



TEST NUMBER: P220328

CATALOG NUMBER: 9002-W1-[RW, RI]-LED4097-F-WT-L1-UNV

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	90
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85
4	101	94	89	86	99	93	89	85	91	87	84	89	86	83	87	85	82	81
5	97	89	84	81	95	89	84	80	87	83	80	85	82	79	84	81	78	77
6	93	85	80	77	92	85	80	76	83	79	76	82	78	75	81	77	75	74
7	89	82	76	73	88	81	76	73	80	75	72	79	75	72	78	74	72	70
8	86	78	73	69	85	77	73	69	76	72	69	76	72	69	75	71	69	67
9	83	75	70	66	82	74	70	66	73	69	66	73	69	66	72	68	66	65
10	80	72	67	64	79	71	67	64	71	66	63	70	66	63	69	66	63	62

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	882064
5°	886671
10°	822627
15°	684655
20°	473274
25°	280739
30°	127215
35°	56677
40°	25762
45°	13397
50°	8980
55°	8602
60°	8190
65°	7822
70°	8367
75°	9531
80°	9376
85°	9624



TEST NUMBER: P220328

CATALOG NUMBER: 9002-W1-[RW, RI]-LED4097-F-WT-L1-UNV

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	166.2	19.2
10°-20°	360.9	41.6
20°-30°	235.8	27.2
30°-40°	65.2	7.5
40°-50°	16.5	1.9
50°-60°	8.8	1.0
60°-70°	6.9	0.8
70°-80°	5.0	0.6
80°-90°	1.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	762.9	88.0
0°-40°	828.2	95.5
0°-60°	853.4	98.4
0°-90°	867.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	867.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1788	
5°	1790	166
15°	1340	361
25°	516	236
35°	94	65
45°	19	17
55°	10	9
65°	7	7
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P220328

CATALOG NUMBER: 9002-W1-[RW, RI]-LED4097-F-WT-L1-UNV

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1787.8
1°	1783.6
2°	1781.9
3°	1786.1
4°	1791.1
5°	1790.3
6°	1780.3
7°	1759.4
8°	1727.0
9°	1686.1
10°	1642.0
11°	1592.8
12°	1539.5
13°	1481.2
14°	1414.6
15°	1340.4
16°	1257.1
17°	1169.6
18°	1079.7
19°	990.5
20°	901.4
22.5°	698.1
25°	515.7
26°	448.2
27°	380.7
28°	320.7
29°	266.6
30°	223.3
32.5°	142.5
35°	94.1
37.5°	60.8
40°	40.0
42.5°	27.5
45°	19.2
47.5°	14.2
50°	11.7
52.5°	10.0
55°	10.0
57.5°	9.2
60°	8.3
62.5°	7.5
65°	6.7
67.5°	6.7
70°	5.8
72.5°	5.0



TEST NUMBER: P220328

CATALOG NUMBER: 9002-W1-[RW, RI]-LED4097-F-WT-L1-UNV

**CANDELA DISTRIBUTION (continued):**

	0°
75°	5.0
77.5°	4.2
80°	3.3
82.5°	2.5
85°	1.7
87.5°	0.8
90°	0.0

(END OF REPORT)