

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: LUMIERE

Report Number: P221128

Luminaire Tested: **9002-W1-[RW, RI]-LED CR-F-WT-LC1-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P221128
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29544)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 9002-W1-[RW, RI]-LEDCR-F-WT-LC1-UNV
Description: LUMIERE LANTERRA 9002 LED WALL LUMINAIRE, RECESSED LENS, FLOOD OPTIC, WHITE HOUSING.
Light Source: (1) COLOR CHAGING MODULE, SET TO 3500K CCT, 90 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 488.7 lumens
Efficiency: N/A
Efficacy: 34.2 lumens/watt
Spacing Criteria (0/90/45): 0.67 / 0.67 / 0.58
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P221128

CATALOG NUMBER: 9002-W1-[RW, RI]-LED CR-F-WT-LC1-UNV

Luminous Intensity Polar Plot

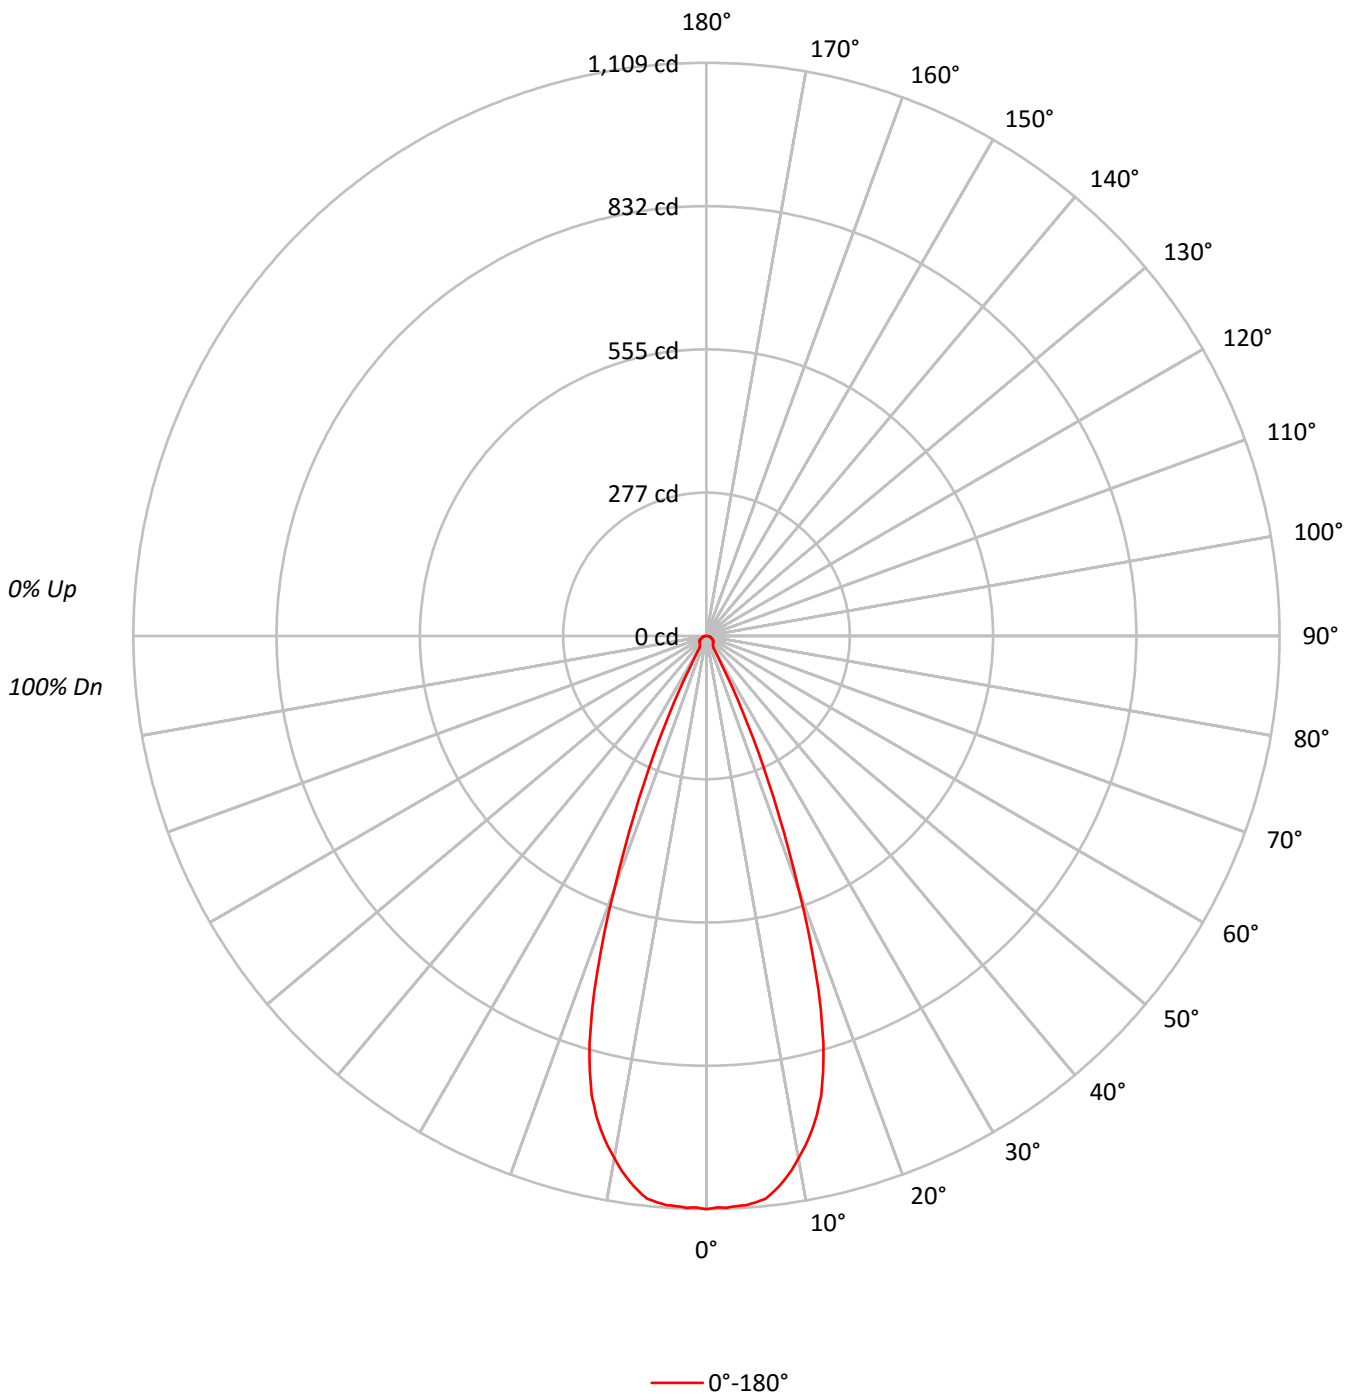



TEST NUMBER: P221128

CATALOG NUMBER: 9002-W1-[RW, RI]-LEDCR-F-WT-LC1-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	94	90	102	97	93	90	94	91	88		92	89	87		90	87	85	84
4	100	93	88	85	98	92	88	84	90	86	83		88	85	82		86	84	81	80
5	96	89	84	80	95	88	83	80	86	82	79		85	81	78		83	80	78	76
6	93	85	80	76	91	84	79	76	83	79	75		81	78	75		80	77	74	73
7	89	81	76	73	88	81	76	72	80	75	72		78	75	72		77	74	71	70
8	86	78	73	70	85	78	73	70	77	72	69		76	72	69		75	71	69	68
9	83	75	70	67	82	75	70	67	74	70	67		73	69	66		72	69	66	65
10	81	72	68	64	80	72	67	64	71	67	64		71	67	64		70	66	64	63

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	547158
5°	544791
10°	514016
15°	445915
20°	274598
25°	103433
30°	15952
35°	13251
40°	12881
45°	12559
50°	13049
55°	13763
60°	13815
65°	12842
70°	11540
75°	13344
80°	14206
85°	11322



TEST NUMBER: P221128

CATALOG NUMBER: 9002-W1-[RW, RI]-LED CR-F-WT-LC1-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.7	21.0
10°-20°	229.6	47.0
20°-30°	93.5	19.1
30°-40°	14.2	2.9
40°-50°	14.2	2.9
50°-60°	14.0	2.9
60°-70°	10.6	2.2
70°-80°	7.3	1.5
80°-90°	2.6	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	425.8	87.1
0°-40°	440.0	90.0
0°-60°	468.2	95.8
0°-90°	488.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	488.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1109	
5°	1100	103
15°	873	230
25°	190	94
35°	22	14
45°	18	14
55°	16	14
65°	11	11
75°	7	7
85°	2	3
90°	0	



TEST NUMBER: P221128

CATALOG NUMBER: 9002-W1-[RW, RI]-LEDCR-F-WT-LC1-UNV

CANDELA DISTRIBUTION (FULL):

0°	
0°	1109
1°	1106
2°	1107
3°	1105
4°	1104
5°	1100
6°	1095
7°	1082
8°	1066
9°	1048
10°	1026
11°	1004
12°	979
13°	950
14°	917
15°	873
16°	821
17°	757
18°	685
19°	605
20°	523
21°	445
22°	373
23°	307
24°	247
25°	190
26°	140
27°	97
28°	63
29°	40
30°	28
32.5°	24
35°	22
37.5°	21
40°	20
42.5°	19
45°	18
47.5°	18
50°	17
52.5°	16
55°	16
57.5°	15
60°	14
62.5°	12
65°	11



TEST NUMBER: P221128

CATALOG NUMBER: 9002-W1-[RW, RI]-LED CR-F-WT-LC1-UNV

CANDELA DISTRIBUTION (continued):

	0°
67.5°	9
70°	8
72.5°	8
75°	7
77.5°	6
80°	5
82.5°	4
85°	2
87.5°	1
90°	0

(END OF REPORT)