

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: P221134

Luminaire Tested: **9002-W1-[RW, RI]-LED CR-W-BK-LC1-UNV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P221134
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29547)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: LUMIERE
Catalog Number: 9002-W1-[RW, RI]-LEDCR-W-BK-LC1-UNV
Description: LUMIERE LANTERRA 9002 LED WALL LUMINAIRE, RECESSED LENS, WIDE FLOOD OPTIC, BLACK HOUSING.
Light Source: (1) COLOR CHAGING MODULE, SET TO 3500K CCT, 90 CRI LED
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 327.9 lumens
Efficiency: N/A
Efficacy: 24.3 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 0.71 / 0.65
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 13.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P221134
CATALOG NUMBER: 9002-W1-[RW, RI]-LEDCR-W-BK-LC1-UNV

Luminous Intensity Polar Plot

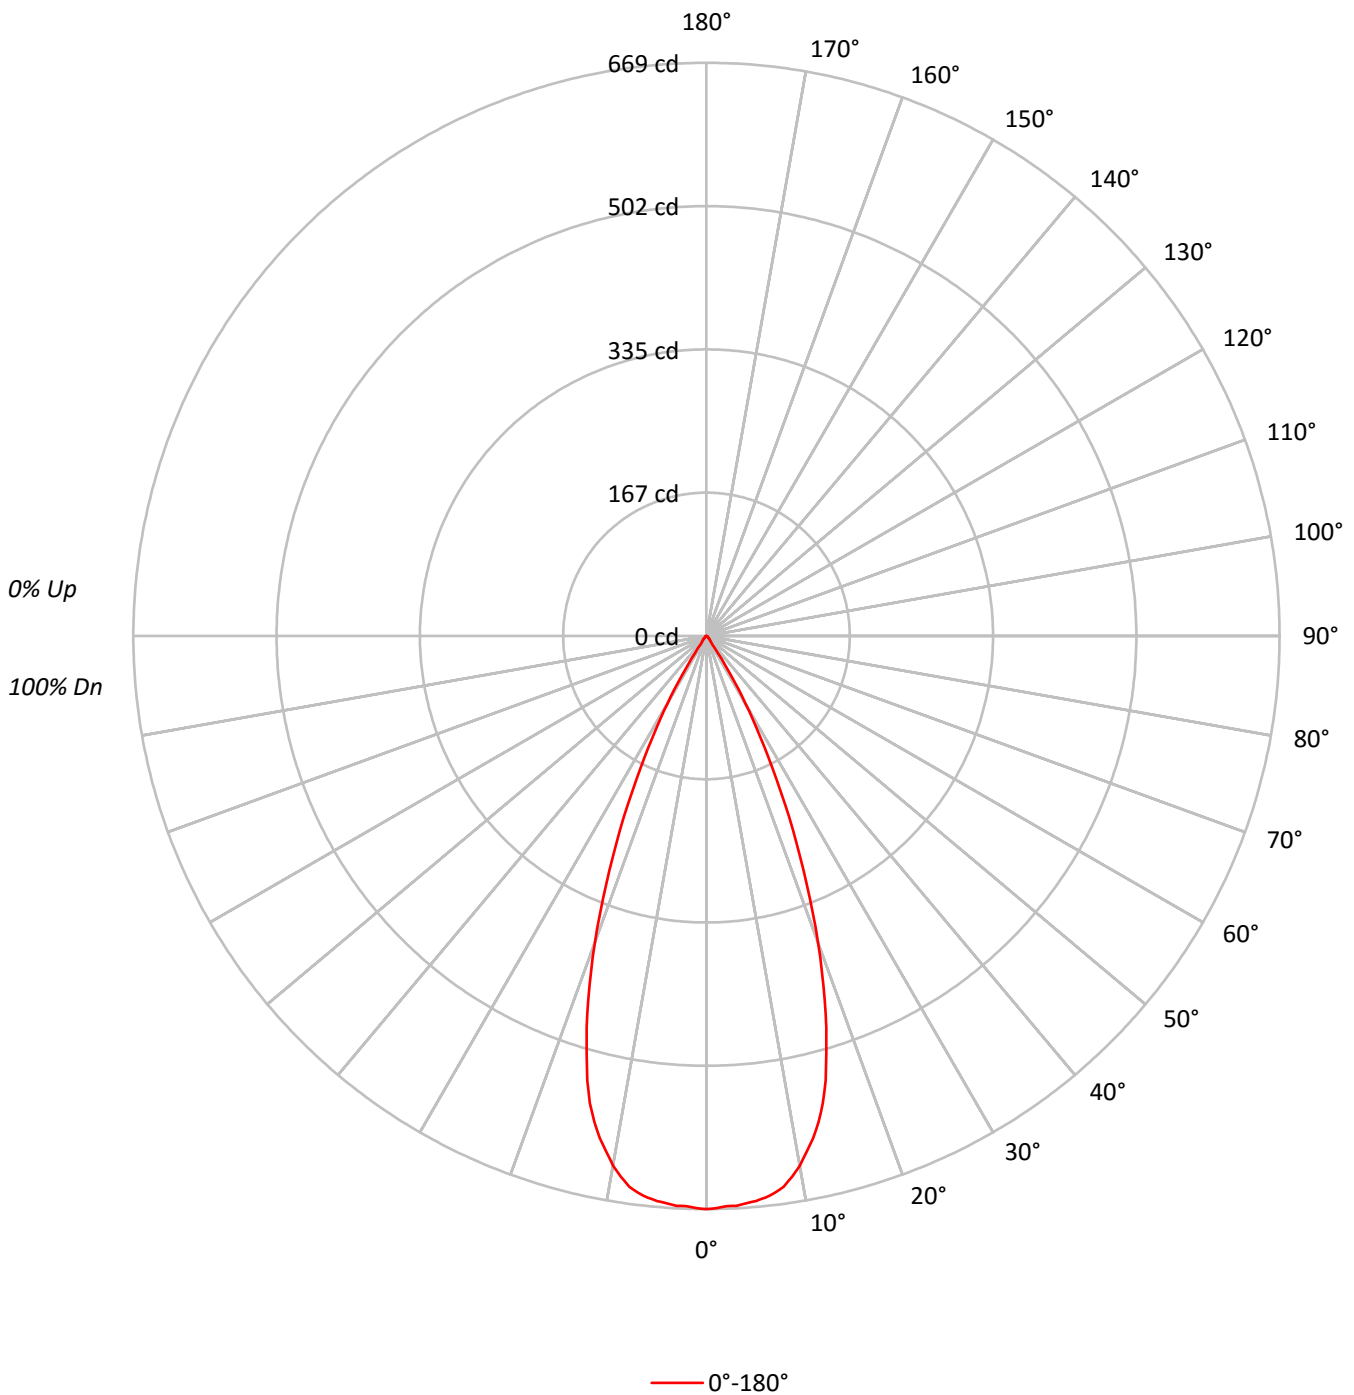



TEST NUMBER: P221134

CATALOG NUMBER: 9002-W1-[RW, RI]-LEDCR-W-BK-LC1-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95
2	110	106	103	100	108	104	101	99	101	99	97	98	96	94	96	94	93	91
3	106	100	96	93	104	99	95	92	97	94	91	94	92	90	92	90	88	87
4	102	96	91	88	100	94	90	87	92	89	86	91	88	85	89	86	84	83
5	98	91	86	83	96	90	86	82	89	85	82	87	84	81	86	83	80	79
6	94	87	82	79	93	86	82	78	85	81	78	84	80	77	82	79	77	76
7	91	83	78	75	90	83	78	75	82	77	74	80	77	74	79	76	74	73
8	88	80	75	72	86	79	75	71	78	74	71	77	74	71	77	73	71	70
9	84	77	72	69	84	76	72	68	75	71	68	75	71	68	74	70	68	67
10	82	74	69	66	81	73	69	66	73	68	66	72	68	65	71	68	65	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	330071
5°	327865
10°	314622
15°	274291
20°	200042
25°	118131
30°	51843
35°	6625
40°	3864
45°	2791
50°	1535
55°	1720
60°	987
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P221134

CATALOG NUMBER: 9002-W1-[RW, RI]-LEDCR-W-BK-LC1-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.2	19.0
10°-20°	144.8	44.2
20°-30°	99.1	30.2
30°-40°	16.7	5.1
40°-50°	3.2	1.0
50°-60°	1.4	0.4
60°-70°	0.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	306.1	93.4
0°-40°	322.8	98.5
0°-60°	327.5	99.9
0°-90°	327.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	327.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	669	
5°	662	62
15°	537	145
25°	217	99
35°	11	17
45°	4	3
55°	2	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P221134

CATALOG NUMBER: 9002-W1-[RW, RI]-LED CR-W-BK-LC1-UNV

CANDELA DISTRIBUTION (FULL):

	0°
0°	669
1°	668
2°	666
3°	666
4°	664
5°	662
6°	659
7°	655
8°	649
9°	639
10°	628
11°	613
12°	599
13°	582
14°	562
15°	537
16°	507
17°	478
18°	447
19°	414
20°	381
21°	347
22°	313
23°	280
24°	248
25°	217
26°	187
27°	159
28°	134
29°	111
30°	91
32.5°	45
35°	11
37.5°	8
40°	6
42.5°	6
45°	4
47.5°	3
50°	2
52.5°	2
55°	2
57.5°	1
60°	1
62.5°	1
65°	0



TEST NUMBER: P221134

CATALOG NUMBER: 9002-W1-[RW, RI]-LED CR-W-BK-LC1-UNV

CANDELA DISTRIBUTION (continued):

	0°
67.5°	0
70°	0
72.5°	0
75°	0
77.5°	0
80°	0
82.5°	0
85°	0
87.5°	0
90°	0

(END OF REPORT)