

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P219469

Luminaire Tested: **SSLED-LD5-24-W-UNV-L840-CD2-SA23-U**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P219469
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27263)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: SSLED-LD5-24-W-UNV-L840-CD2-SA23-U
Description: METALUX ROUND HIGH BAY STEELER LED WITH WIDE DISTRIBUTION LENS WITH Rev.G BOARD. LENS DIFFUSE 2407, 7.5% BLEND. SHROUD ACCESSORY INSTALLED. FIXTURE CENTERED TO LEDS
Light Source: (240) 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 22830.9 lumens
Efficiency: N/A
Efficacy: 119.8 lumens/watt
Spacing Criteria (0/90/45): 1.7 / 1.7 / 1.49
Luminous Opening: Circular (Dia: 1.41' x H: 0')
CIE Type: Direct


Input Watts (W): 190.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219469

CATALOG NUMBER: SSLED-LD5-24-W-UNV-L840-CD2-SA23-U

Luminous Intensity Polar Plot

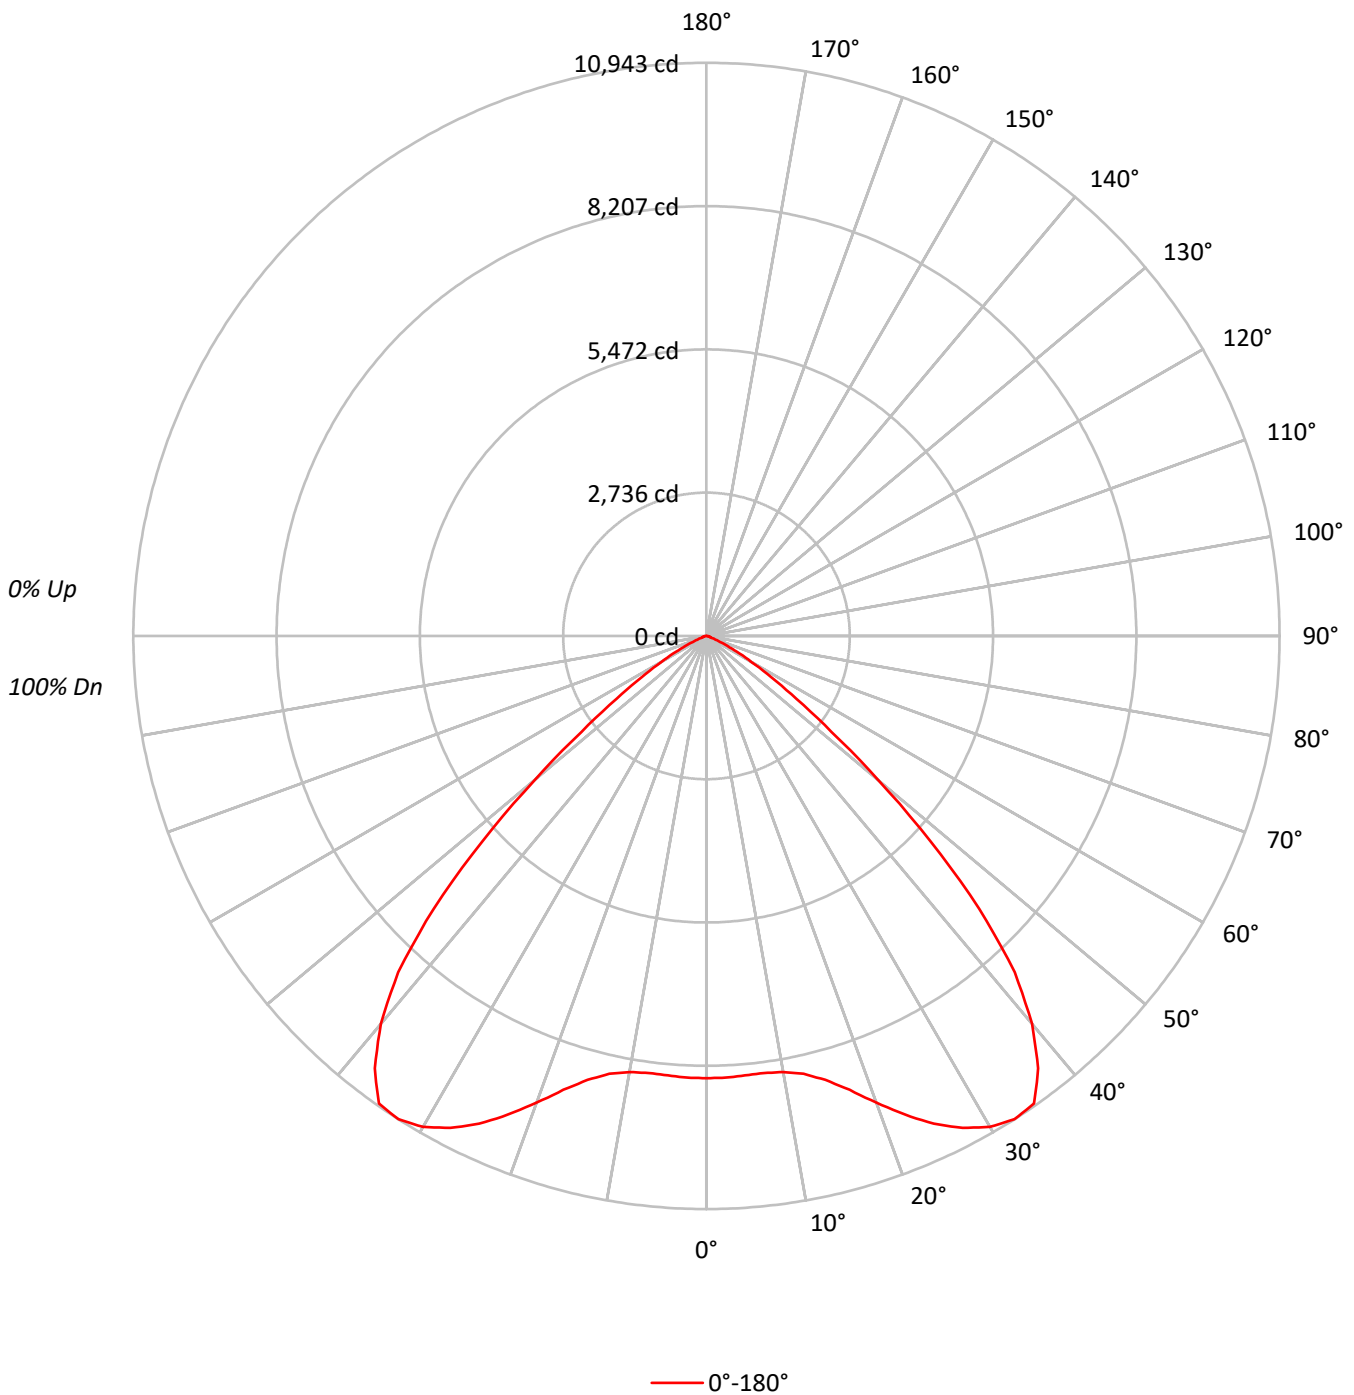



TEST NUMBER: P219469

CATALOG NUMBER: SSLED-LD5-24-W-UNV-L840-CD2-SA23-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90
2	104	98	93	88	102	96	91	87	93	89	85	90	86	83	87	84	82	80
3	97	88	82	77	94	87	81	76	84	79	75	81	77	73	79	75	72	70
4	90	80	72	67	88	78	72	67	76	70	66	74	69	65	72	68	64	62
5	83	72	65	59	81	71	64	59	69	63	58	67	62	58	66	61	57	55
6	77	66	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49
7	72	60	52	47	70	59	52	46	58	51	46	56	50	46	55	50	46	44
8	67	55	47	42	65	54	47	42	53	46	41	52	46	41	50	45	41	39
9	62	50	43	38	61	50	42	38	49	42	37	48	42	37	47	41	37	35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	58204
5°	58267
10°	59179
15°	62607
20°	69537
25°	78170
30°	86143
35°	91727
40°	86998
45°	71827
50°	45820
55°	25160
60°	13619
65°	6396
70°	2012
75°	1569
80°	1624
85°	1740



TEST NUMBER: P219469

CATALOG NUMBER: SSLED-LD5-24-W-UNV-L840-CD2-SA23-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	804.6	3.5
10°-20°	2522.6	11.0
20°-30°	4752.0	20.8
30°-40°	6659.2	29.2
40°-50°	5526.5	24.2
50°-60°	2035.3	8.9
60°-70°	441.6	1.9
70°-80°	65.6	0.3
80°-90°	23.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8079.2	35.4
0°-40°	14738.4	64.6
0°-60°	22300.3	97.7
0°-90°	22830.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	22830.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8443	
5°	8420	805
15°	8772	2523
25°	10277	4752
35°	10900	6659
45°	7368	5526
55°	2093	2035
65°	392	442
75°	59	66
85°	22	23
90°	0	



TEST NUMBER: P219469

CATALOG NUMBER: SSLED-LD5-24-W-UNV-L840-CD2-SA23-U

CANDELA DISTRIBUTION (FULL):

	0°
0°	8443.3
2.5°	8440.3
5°	8420.3
7.5°	8415.3
10°	8454.3
12.5°	8559.0
15°	8772.5
17.5°	9086.9
20°	9479.0
22.5°	9890.1
25°	10277.2
27.5°	10588.5
30°	10822.0
32.5°	10942.7
35°	10899.8
37.5°	10401.9
40°	9667.6
42.5°	8710.7
45°	7367.7
47.5°	5799.1
50°	4272.5
52.5°	3008.3
55°	2093.4
57.5°	1465.7
60°	987.8
62.5°	652.6
65°	392.1
67.5°	213.5
70°	99.8
72.5°	70.8
75°	58.9
77.5°	48.9
80°	40.9
82.5°	32.9
85°	22.0
87.5°	11.0
90°	0.0

(END OF REPORT)