

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P219408

Luminaire Tested: **SSLED-LD5-30-M-UNV-L835-CD2-SA23-U**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

**Test Information**

Test Method: LM-79-08  
Report Number: P219408  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27262)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: METALUX  
Catalog Number: SSLED-LD5-30-M-UNV-L835-CD2-SA23-U  
Description: METALUX ROUND HIGH BAY STEELER LED WITH MEDIUM DISTRIBUTION LENS WITH Rev.G BOARD. LENS DIFFUSE 2407, 7.5% BLEND. SHROUD ACCESSORY INSTALLED. FIXTURE CENTERED TO LEDS  
Light Source: (240) 3500K CCT, 80 CRI LEDS  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 27460.5 lumens  
Efficiency: N/A  
Efficacy: 103.1 lumens/watt  
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.15  
Luminous Opening: Circular (Dia: 1.41' x H: 0')  
CIE Type: Direct


Input Watts (W): 266.35  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P219408

CATALOG NUMBER: SSLED-LD5-30-M-UNV-L835-CD2-SA23-U

### Luminous Intensity Polar Plot

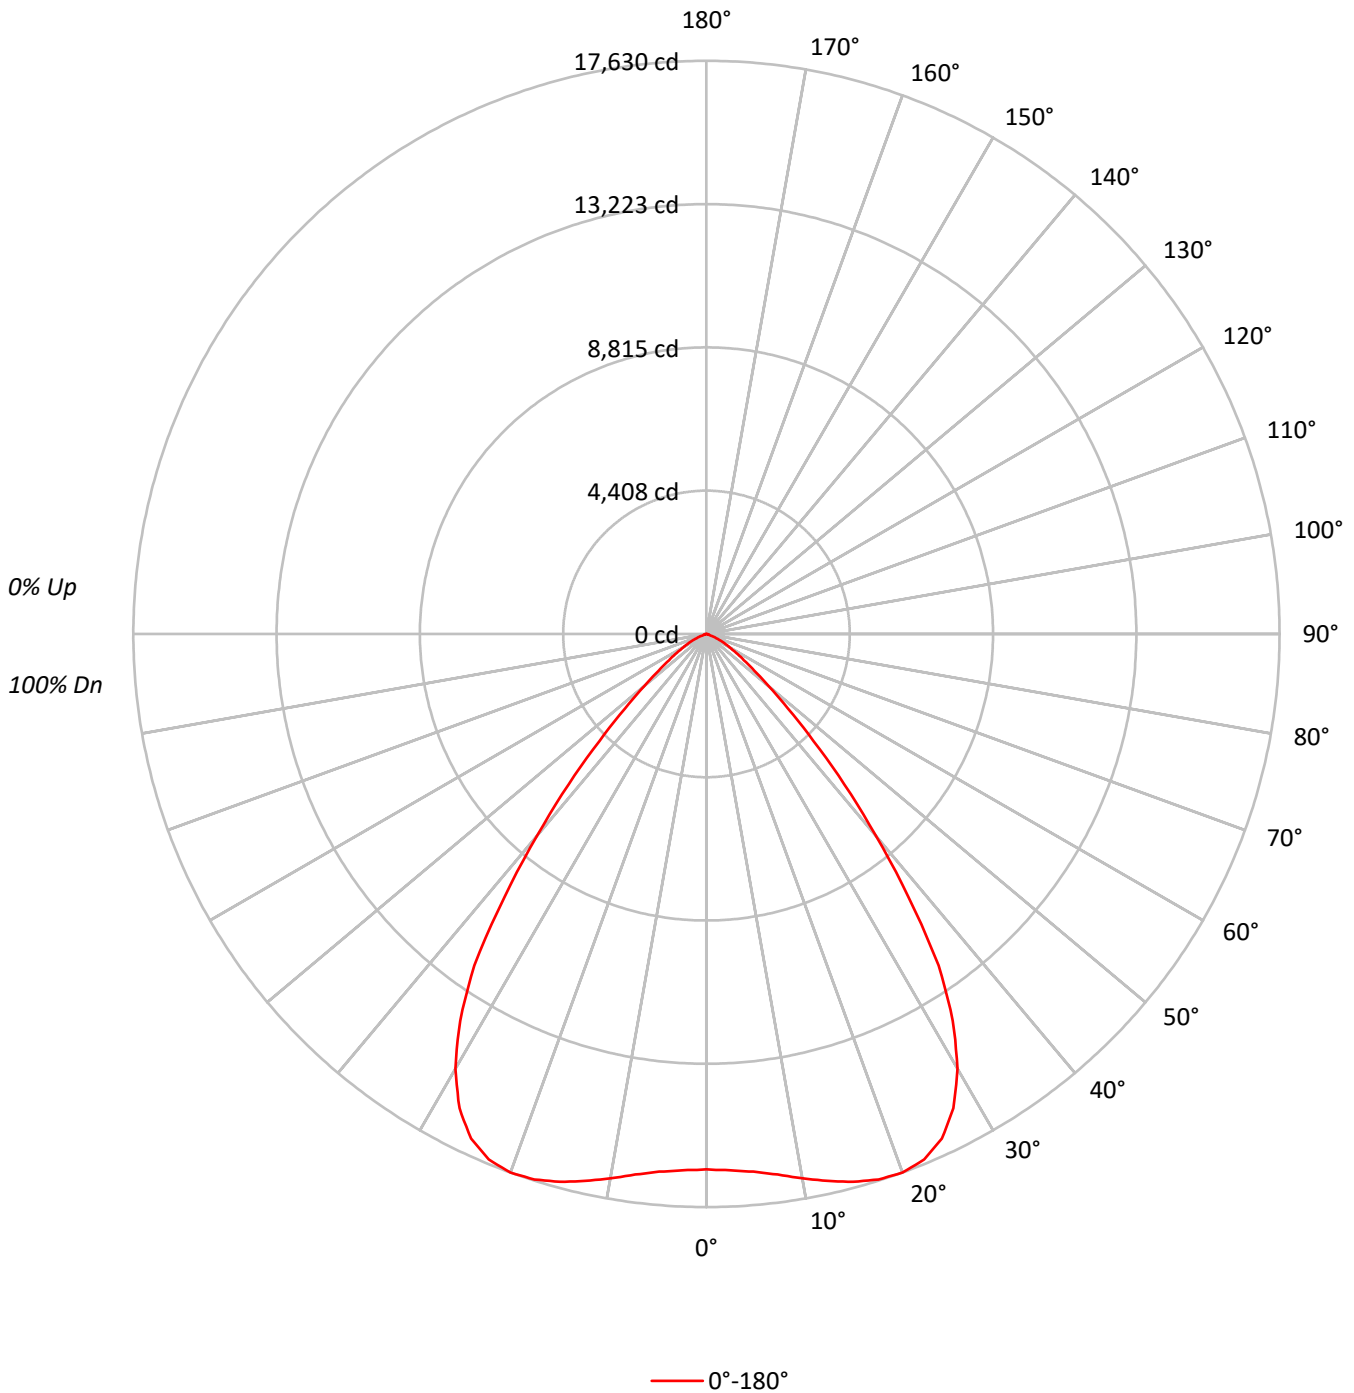



TEST NUMBER: P219408

CATALOG NUMBER: SSLED-LD5-30-M-UNV-L835-CD2-SA23-U

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	95	93	92
2	106	100	95	92	104	98	94	91	95	92	88		92	89	87		89	87	85	83
3	99	92	86	81	97	90	85	81	88	83	79		85	81	78		83	80	77	75
4	93	84	78	73	91	83	77	72	81	76	72		79	74	71		77	73	70	68
5	87	78	71	66	86	77	70	65	75	69	65		73	68	64		71	67	64	62
6	82	72	65	60	80	71	64	59	69	63	59		68	62	59		66	62	58	56
7	77	66	59	54	76	66	59	54	64	58	54		63	58	54		62	57	53	52
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58	53	49	47
9	68	57	50	46	67	57	50	46	56	50	46		55	49	45		54	49	45	44
10	64	53	47	42	63	53	47	42	52	46	42		51	46	42		50	45	42	40

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	113528
5°	114885
10°	119006
15°	124501
20°	129336
25°	130293
30°	122926
35°	104756
40°	72778
45°	45447
50°	26687
55°	16884
60°	11425
65°	7259
70°	2022
75°	1382
80°	1405
85°	1867



TEST NUMBER: P219408

CATALOG NUMBER: SSLED-LD5-30-M-UNV-L835-CD2-SA23-U

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1597.7	5.8
10°-20°	4941.0	18.0
20°-30°	7795.2	28.4
30°-40°	7530.4	27.4
40°-50°	3738.7	13.6
50°-60°	1331.4	4.8
60°-70°	443.2	1.6
70°-80°	59.9	0.2
80°-90°	23.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	14333.9	52.2
0°-40°	21864.2	79.6
0°-60°	26934.4	98.1
0°-90°	27460.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	27460.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	16469	
5°	16602	###
15°	17445	4941
25°	17130	7795
35°	12448	7530
45°	4662	3739
55°	1405	1331
65°	445	443
75°	52	60
85°	24	23
90°	0	



TEST NUMBER: P219408

CATALOG NUMBER: SSLED-LD5-30-M-UNV-L835-CD2-SA23-U

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	16468.8
2.5°	16511.3
5°	16602.2
7.5°	16772.2
10°	17001.2
12.5°	17231.4
15°	17445.1
17.5°	17593.8
20°	17630.4
22.5°	17498.2
25°	17129.9
27.5°	16451.1
30°	15443.0
32.5°	14105.5
35°	12448.1
37.5°	10215.9
40°	8087.5
42.5°	6274.2
45°	4661.7
47.5°	3396.2
50°	2488.4
52.5°	1854.5
55°	1404.8
57.5°	1080.1
60°	828.7
62.5°	626.8
65°	445.0
67.5°	268.0
70°	100.3
72.5°	64.9
75°	51.9
77.5°	42.5
80°	35.4
82.5°	30.7
85°	23.6
87.5°	13.0
90°	0.0

(END OF REPORT)