

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: METALUX

Report Number: P219345

Luminaire Tested: **SSLED-LD5-30-N-UNV-L835-CD2-SA23-U**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P219345
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27261)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: SSLED-LD5-30-N-UNV-L835-CD2-SA23-U
Description: METALUX ROUND HIGH BAY STEELER LED WITH NARROW DISTRIBUTION LENS WITH Rev.G BOARD. LENS DIFFUSE 2407, 7.5% BLEND. SHROUD ACCESSORY INSTALLED. FIXTURE CENTERED TO LEDS
Light Source: (240) 3500K CCT, 80 CRI LEDS
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 27043.8 lumens
Efficiency: N/A
Efficacy: 101.5 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.86
Luminous Opening: Circular (Dia: 1.41' x H: 0')
CIE Type: Direct


Input Watts (W): 266.35
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219345

CATALOG NUMBER: SSLED-LD5-30-N-UNV-L835-CD2-SA23-U

Luminous Intensity Polar Plot

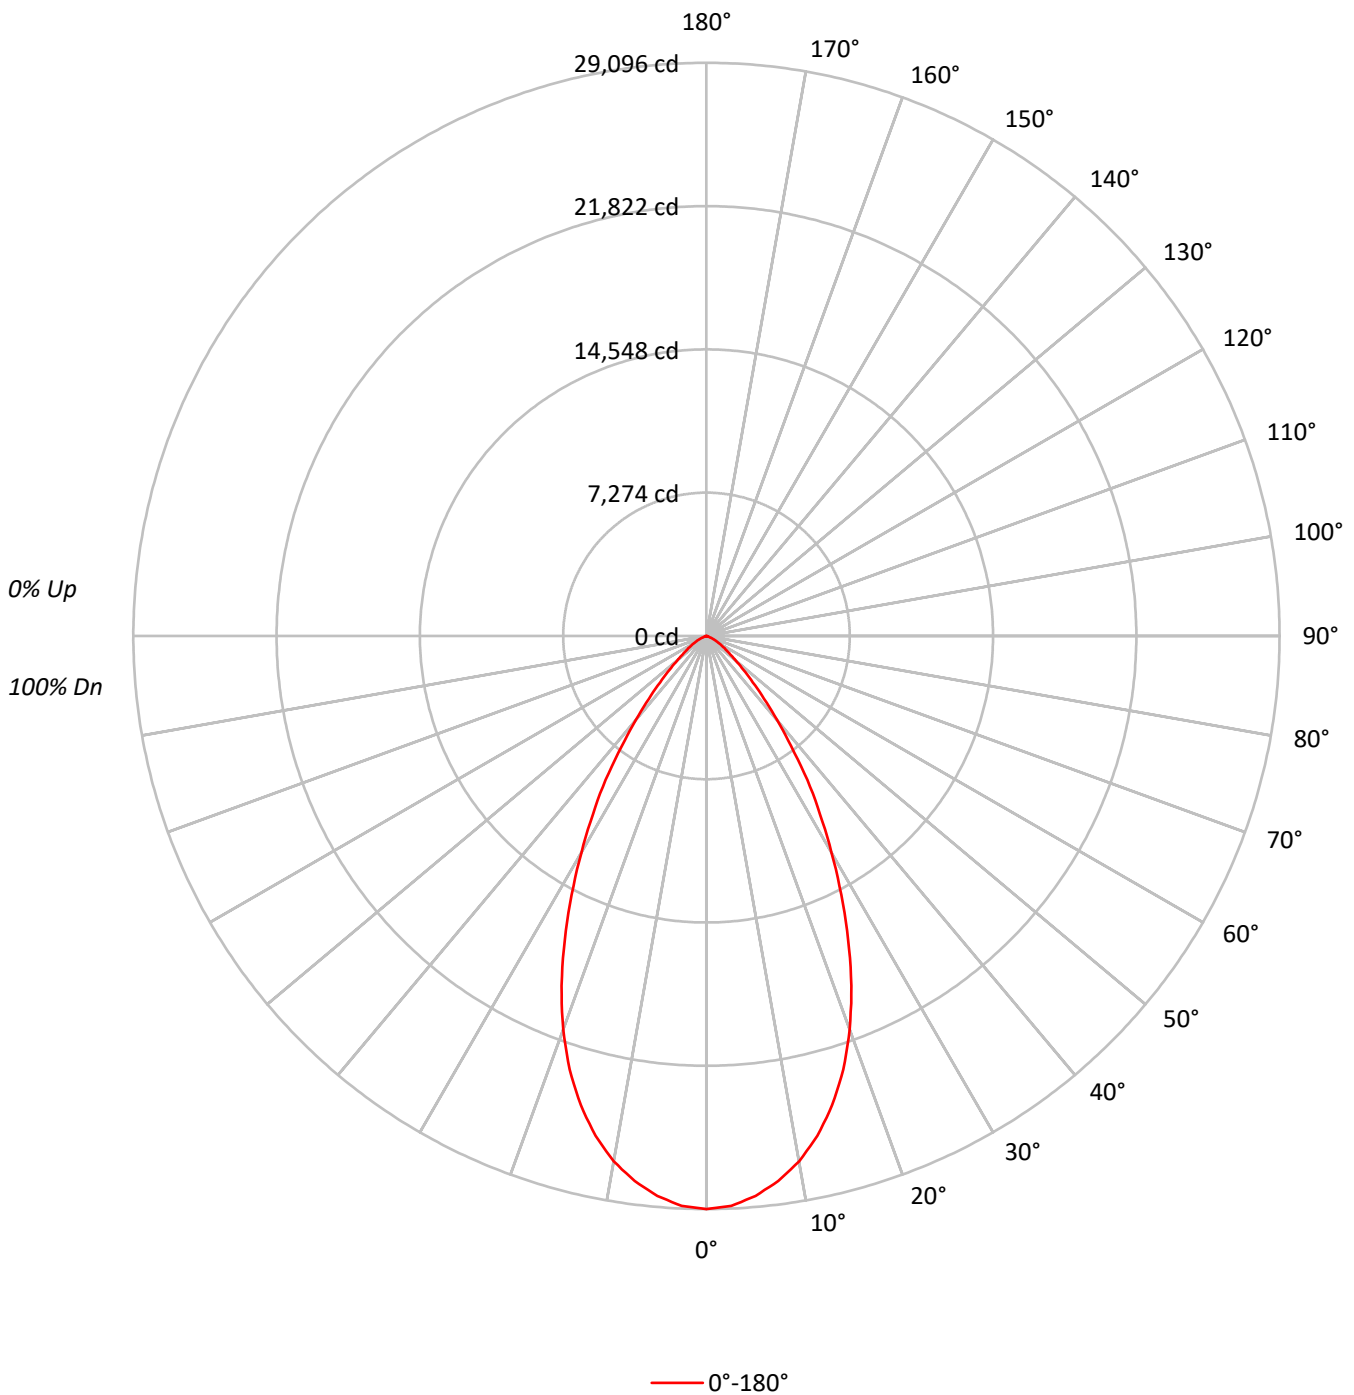



TEST NUMBER: P219345

CATALOG NUMBER: SSLED-LD5-30-N-UNV-L835-CD2-SA23-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97	96	94	93
2	107	102	97	94	105	100	96	93	97	93	91		94	91	89		91	89	87	85
3	101	94	89	85	99	93	88	84	90	86	82		88	84	81		85	82	80	78
4	95	87	81	77	94	86	81	76	84	79	76		82	78	75		80	77	74	72
5	90	81	75	70	89	80	74	70	78	73	69		77	72	69		75	71	68	67
6	85	76	69	65	84	75	69	65	74	68	64		72	67	64		71	67	63	62
7	81	71	65	60	79	70	64	60	69	64	60		68	63	59		67	62	59	57
8	77	67	60	56	75	66	60	56	65	59	56		64	59	55		63	58	55	54
9	73	63	56	52	72	62	56	52	61	56	52		60	55	52		59	55	52	50
10	69	59	53	49	68	59	53	49	58	52	49		57	52	49		56	52	48	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	200575
5°	197437
10°	189573
15°	175991
20°	155938
25°	129394
30°	101049
35°	75142
40°	50065
45°	32407
50°	20914
55°	14230
60°	9878
65°	6316
70°	1737
75°	1132
80°	1123
85°	1590



TEST NUMBER: P219345

CATALOG NUMBER: SSLED-LD5-30-N-UNV-L835-CD2-SA23-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2677.8	9.9
10°-20°	6854.2	25.3
20°-30°	7754.8	28.7
30°-40°	5539.4	20.5
40°-50°	2662.1	9.8
50°-60°	1101.7	4.1
60°-70°	383.6	1.4
70°-80°	49.6	0.2
80°-90°	20.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	17286.8	63.9
0°-40°	22826.2	84.4
0°-60°	26590.1	98.3
0°-90°	27043.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	27043.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	29096	
5°	28532	###
15°	24660	6854
25°	17012	7755
35°	8929	5539
45°	3324	2662
55°	1184	1102
65°	387	384
75°	42	50
85°	20	21
90°	0	



TEST NUMBER: P219345

CATALOG NUMBER: SSLED-LD5-30-N-UNV-L835-CD2-SA23-U

CANDELA DISTRIBUTION (FULL):

	0°
0°	29096.1
2.5°	28953.3
5°	28531.9
7.5°	27909.8
10°	27082.3
12.5°	25992.7
15°	24660.0
17.5°	23082.8
20°	21256.7
22.5°	19223.9
25°	17011.7
27.5°	14818.4
30°	12694.7
32.5°	10730.4
35°	8929.1
37.5°	7046.2
40°	5563.5
42.5°	4324.0
45°	3324.2
47.5°	2541.5
50°	1950.1
52.5°	1514.5
55°	1184.0
57.5°	926.7
60°	716.5
62.5°	541.8
65°	387.2
67.5°	231.4
70°	86.2
72.5°	54.3
75°	42.5
77.5°	34.2
80°	28.3
82.5°	24.8
85°	20.1
87.5°	16.5
90°	0.0

(END OF REPORT)