

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P219412

Luminaire Tested: **SSLED-LD5-36-M-UNV-L840-CD2-SA23-U**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P219412
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27262)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: SSLED-LD5-36-M-UNV-L840-CD2-SA23-U
Description: METALUX ROUND HIGH BAY STEELER LED WITH MEDIUM DISTRIBUTION LENS WITH Rev.G BOARD. LENS DIFFUSE 2407, 7.5% BLEND. SHROUD ACCESSORY INSTALLED. FIXTURE CENTERED TO LEDS
Light Source: (240) 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 34267.4 lumens
Efficiency: N/A
Efficacy: 102.7 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.15
Luminous Opening: Circular (Dia: 1.41' x H: 0')
CIE Type: Direct


Input Watts (W): 333.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219412

CATALOG NUMBER: SSLED-LD5-36-M-UNV-L840-CD2-SA23-U

Luminous Intensity Polar Plot

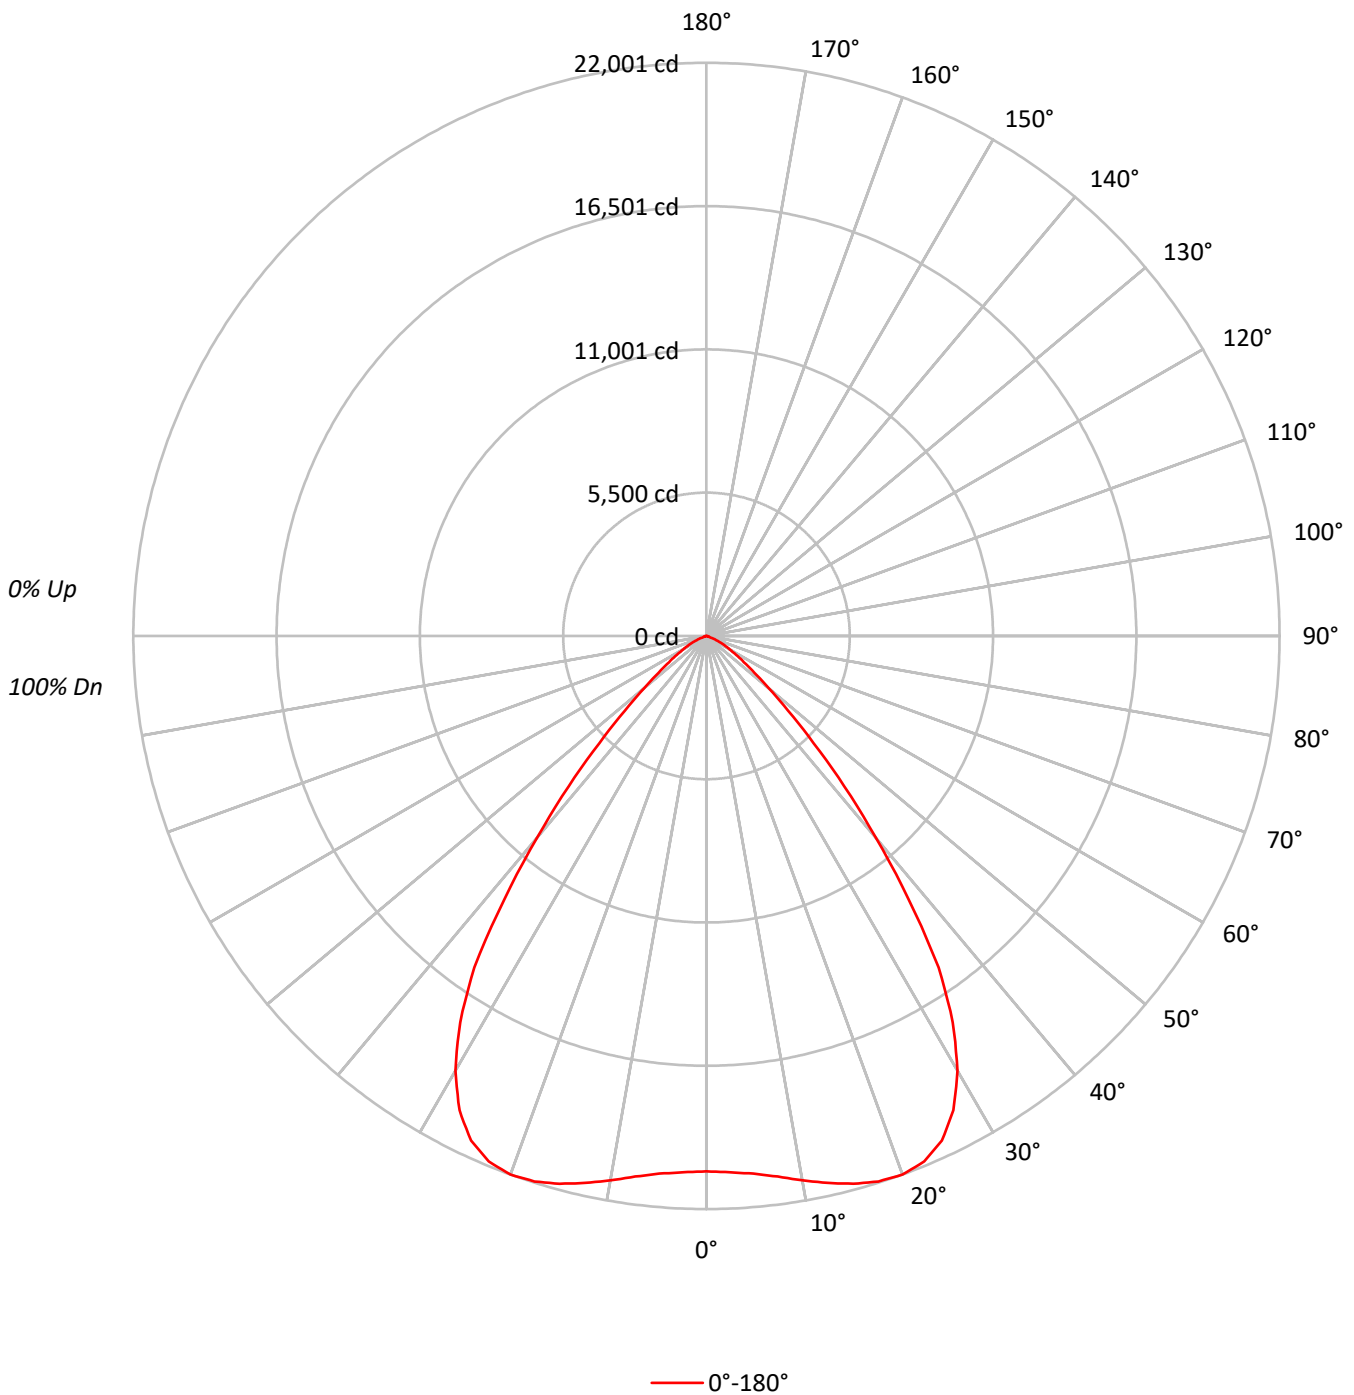



TEST NUMBER: P219412

CATALOG NUMBER: SSLED-LD5-36-M-UNV-L840-CD2-SA23-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92
2	106	100	95	92	104	98	94	91	95	92	88	92	89	87	89	87	85	83
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75
4	93	84	78	73	91	83	77	72	81	76	72	79	74	71	77	73	70	68
5	87	78	71	66	86	77	70	65	75	69	65	73	68	64	71	67	64	62
6	82	72	65	60	80	71	64	59	69	63	59	68	62	59	66	62	58	56
7	77	66	59	54	76	66	59	54	64	58	54	63	58	54	62	57	53	52
8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47
9	68	57	50	46	67	57	50	46	56	50	46	55	49	45	54	49	45	44
10	64	53	47	42	63	53	47	42	52	46	42	51	46	42	50	45	42	40

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	141670
5°	143363
10°	148506
15°	155361
20°	161395
25°	162590
30°	153397
35°	130723
40°	90818
45°	56712
50°	33303
55°	21068
60°	14257
65°	9059
70°	2523
75°	1726
80°	1755
85°	2333



TEST NUMBER: P219412

CATALOG NUMBER: SSLED-LD5-36-M-UNV-L840-CD2-SA23-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1993.7	5.8
10°-20°	6165.7	18.0
20°-30°	9727.5	28.4
30°-40°	9397.0	27.4
40°-50°	4665.5	13.6
50°-60°	1661.4	4.8
60°-70°	553.0	1.6
70°-80°	74.7	0.2
80°-90°	28.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	17886.9	52.2
0°-40°	27283.9	79.6
0°-60°	33610.8	98.1
0°-90°	34267.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	34267.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	20551	
5°	20718	###
15°	21769	6166
25°	21376	9727
35°	15534	9397
45°	5817	4665
55°	1753	1661
65°	555	553
75°	65	75
85°	30	29
90°	0	



TEST NUMBER: P219412

CATALOG NUMBER: SSLED-LD5-36-M-UNV-L840-CD2-SA23-U

CANDELA DISTRIBUTION (FULL):

	0°
0°	20551.1
2.5°	20604.1
5°	20717.6
7.5°	20929.7
10°	21215.5
12.5°	21502.7
15°	21769.3
17.5°	21955.0
20°	22000.6
22.5°	21835.6
25°	21376.0
27.5°	20529.0
30°	19271.0
32.5°	17602.0
35°	15533.7
37.5°	12748.1
40°	10092.1
42.5°	7829.5
45°	5817.2
47.5°	4238.1
50°	3105.3
52.5°	2314.2
55°	1753.0
57.5°	1347.9
60°	1034.1
62.5°	782.2
65°	555.4
67.5°	334.4
70°	125.2
72.5°	81.0
75°	64.8
77.5°	53.0
80°	44.2
82.5°	38.3
85°	29.5
87.5°	16.2
90°	0.0

(END OF REPORT)