

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: METALUX

Report Number: P219413

Luminaire Tested: **SSLED-LD5-36-M-UNV-L850-CD2-SA23-U**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P219413
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27262)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: SSLED-LD5-36-M-UNV-L850-CD2-SA23-U
Description: METALUX ROUND HIGH BAY STEELER LED WITH MEDIUM DISTRIBUTION LENS WITH Rev.G BOARD. LENS DIFFUSE 2407, 7.5% BLEND. SHROUD ACCESSORY INSTALLED. FIXTURE CENTERED TO LEDS
Light Source: (240) 5000K CCT, 80 CRI LEDS
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 35351.2 lumens
Efficiency: N/A
Efficacy: 105.9 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.15
Luminous Opening: Circular (Dia: 1.41' x H: 0')
CIE Type: Direct


Input Watts (W): 333.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219413

CATALOG NUMBER: SSLED-LD5-36-M-UNV-L850-CD2-SA23-U

Luminous Intensity Polar Plot

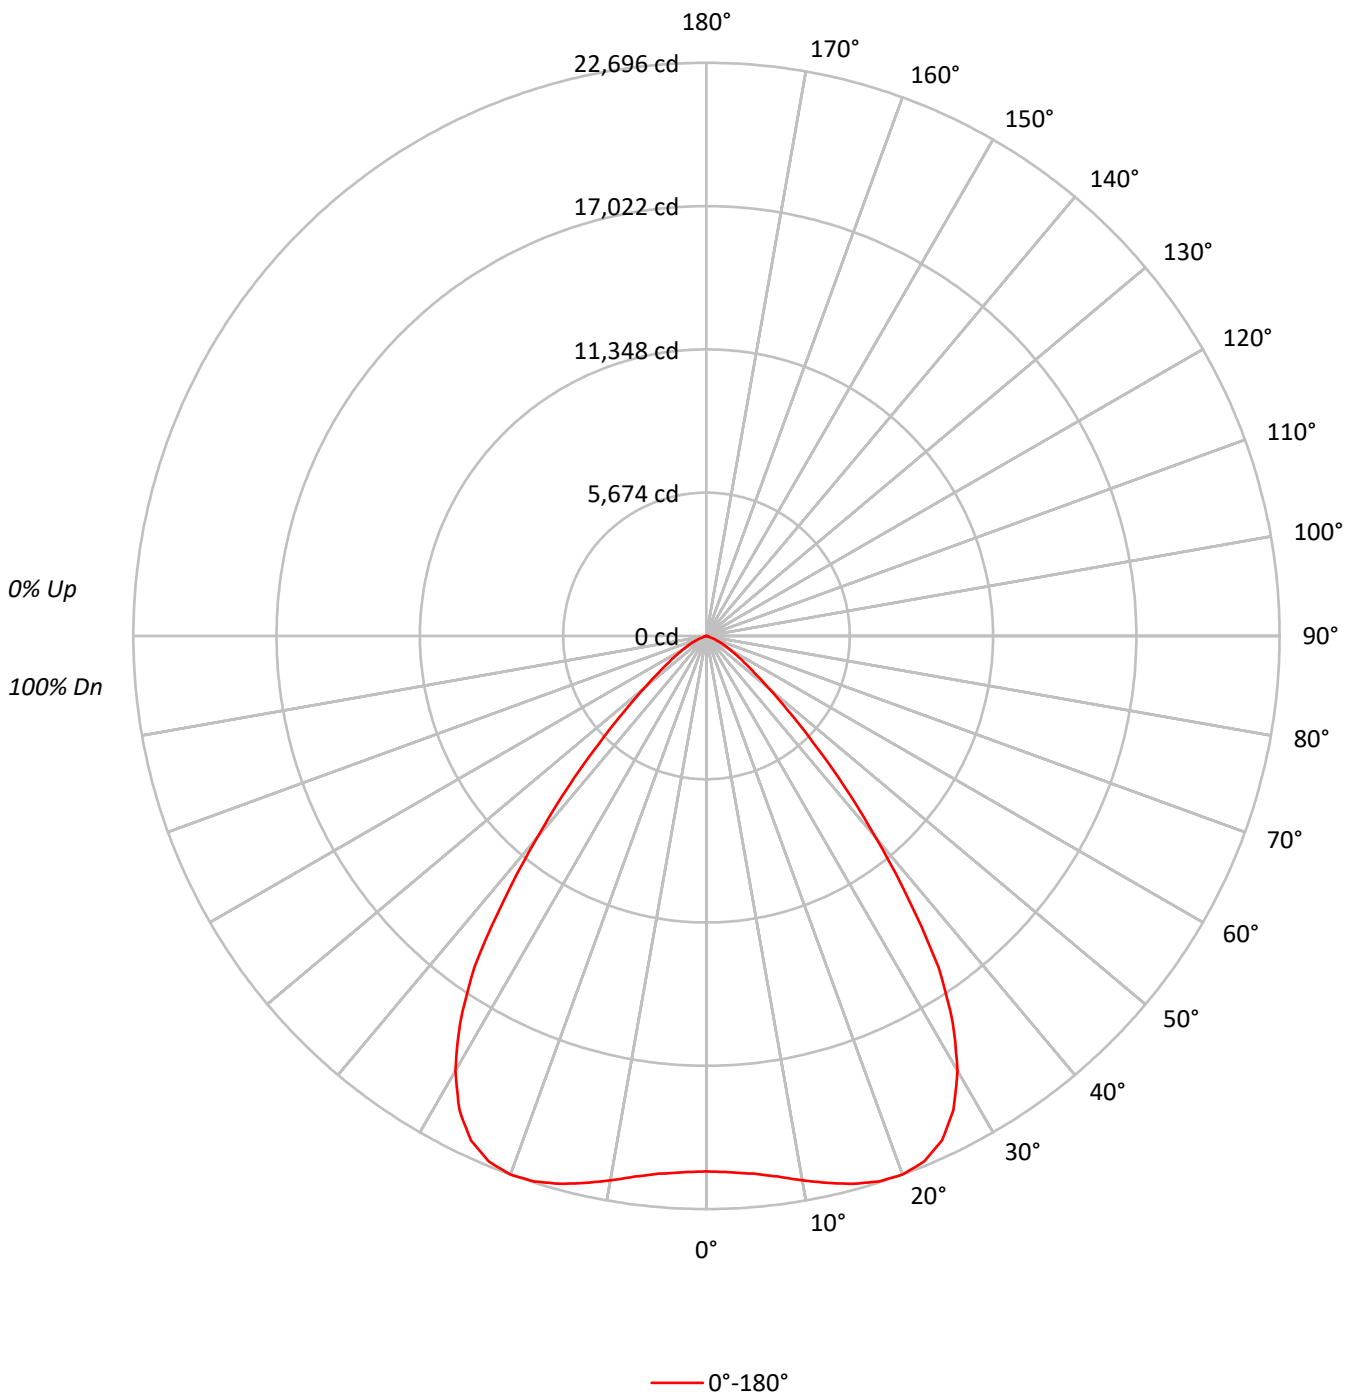



TEST NUMBER: P219413

CATALOG NUMBER: SSLED-LD5-36-M-UNV-L850-CD2-SA23-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	95	93	92
2	106	100	95	92	104	98	94	91	95	92	88		92	89	87		89	87	85	83
3	99	92	86	81	97	90	85	81	88	83	79		85	81	78		83	80	77	75
4	93	84	78	73	91	83	77	72	81	76	72		79	74	71		77	73	70	68
5	87	78	71	66	86	77	70	65	75	69	65		73	68	64		71	67	64	62
6	82	72	65	60	80	71	64	59	69	63	59		68	62	59		66	62	58	56
7	77	66	59	54	76	66	59	54	64	58	54		63	58	54		62	57	53	52
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58	53	49	47
9	68	57	50	46	67	57	50	46	56	50	46		55	49	45		54	49	45	44
10	64	53	47	42	63	53	47	42	52	46	42		51	46	42		50	45	42	40

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	146150
5°	147897
10°	153202
15°	160275
20°	166500
25°	167732
30°	158247
35°	134858
40°	93690
45°	58505
50°	34356
55°	21734
60°	14708
65°	9345
70°	2604
75°	1782
80°	1810
85°	2404



TEST NUMBER: P219413

CATALOG NUMBER: SSLED-LD5-36-M-UNV-L850-CD2-SA23-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2056.8	5.8
10°-20°	6360.7	18.0
20°-30°	10035.1	28.4
30°-40°	9694.1	27.4
40°-50°	4813.0	13.6
50°-60°	1714.0	4.8
60°-70°	570.5	1.6
70°-80°	77.1	0.2
80°-90°	29.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	18452.6	52.2
0°-40°	28146.8	79.6
0°-60°	34673.8	98.1
0°-90°	35351.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	35351.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	21201	
5°	21373	###
15°	22458	6361
25°	22052	10035
35°	16025	9694
45°	6001	4813
55°	1808	1714
65°	573	571
75°	67	77
85°	30	30
90°	0	



TEST NUMBER: P219413

CATALOG NUMBER: SSLED-LD5-36-M-UNV-L850-CD2-SA23-U

CANDELA DISTRIBUTION (FULL):

	0°
0°	21201.0
2.5°	21255.8
5°	21372.8
7.5°	21591.6
10°	21886.4
12.5°	22182.8
15°	22457.8
17.5°	22649.3
20°	22696.4
22.5°	22526.2
25°	22052.1
27.5°	21178.3
30°	19880.4
32.5°	18158.6
35°	16025.0
37.5°	13151.3
40°	10411.3
42.5°	8077.1
45°	6001.2
47.5°	4372.1
50°	3203.5
52.5°	2387.4
55°	1808.4
57.5°	1390.5
60°	1066.8
62.5°	806.9
65°	572.9
67.5°	345.0
70°	129.2
72.5°	83.6
75°	66.9
77.5°	54.7
80°	45.6
82.5°	39.5
85°	30.4
87.5°	16.7
90°	0.0

(END OF REPORT)