

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: METALUX

Report Number: P219474

Luminaire Tested: **SSLED-LD5-36-W-UNV-L835-CD2-SA23-U**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P219474
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27263)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: SSLED-LD5-36-W-UNV-L835-CD2-SA23-U
Description: METALUX ROUND HIGH BAY STEELER LED WITH WIDE DISTRIBUTION LENS WITH Rev.G BOARD. LENS DIFFUSE 2407, 7.5% BLEND. SHROUD ACCESSORY INSTALLED. FIXTURE CENTERED TO LEDS
Light Source: (240) 3500K CCT, 80 CRI LEDS
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 31516.6 lumens
Efficiency: N/A
Efficacy: 94.4 lumens/watt
Spacing Criteria (0/90/45): 1.7 / 1.7 / 1.49
Luminous Opening: Circular (Dia: 1.41' x H: 0')
CIE Type: Direct


Input Watts (W): 333.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219474

CATALOG NUMBER: SSLED-LD5-36-W-UNV-L835-CD2-SA23-U

Luminous Intensity Polar Plot

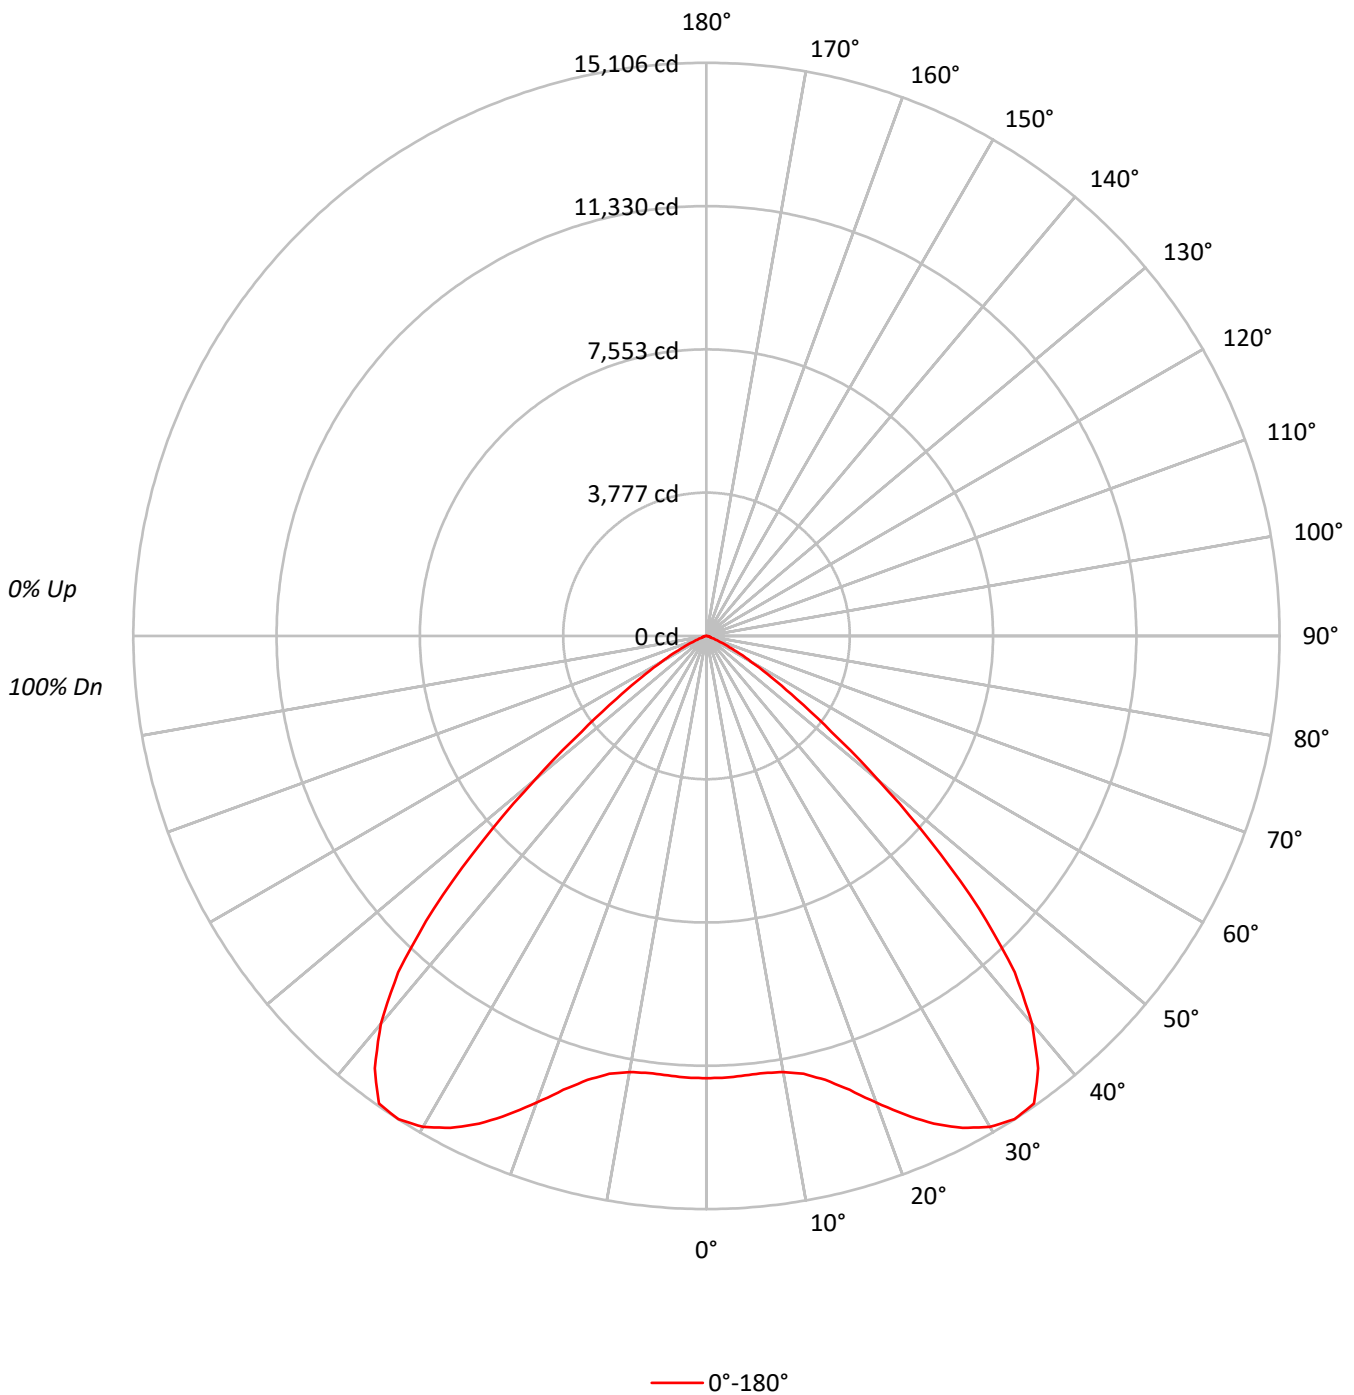



TEST NUMBER: P219474

CATALOG NUMBER: SSLED-LD5-36-W-UNV-L835-CD2-SA23-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90
2	104	98	93	88	102	96	91	87	93	89	85	90	86	83	87	84	82	80
3	97	88	82	77	94	87	81	76	84	79	75	81	77	73	79	75	72	70
4	90	80	72	67	88	78	72	67	76	70	66	74	69	65	72	68	64	62
5	83	72	65	59	81	71	64	59	69	63	58	67	62	58	66	61	57	55
6	77	66	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49
7	72	60	52	47	70	59	52	46	58	51	46	56	50	46	55	50	46	44
8	67	55	47	42	65	54	47	42	53	46	41	52	46	41	50	45	41	39
9	62	50	43	38	61	50	42	38	49	42	37	48	42	37	47	41	37	35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	80347
5°	80434
10°	81692
15°	86425
20°	95992
25°	107909
30°	118915
35°	126623
40°	120094
45°	99153
50°	63252
55°	34730
60°	18800
65°	8829
70°	2775
75°	2165
80°	2243
85°	2397



TEST NUMBER: P219474

CATALOG NUMBER: SSLED-LD5-36-W-UNV-L835-CD2-SA23-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1110.7	3.5
10°-20°	3482.2	11.0
20°-30°	6559.8	20.8
30°-40°	9192.7	29.2
40°-50°	7628.9	24.2
50°-60°	2809.7	8.9
60°-70°	609.5	1.9
70°-80°	90.6	0.3
80°-90°	32.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	11152.8	35.4
0°-40°	20345.5	64.6
0°-60°	30784.0	97.7
0°-90°	31516.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	31516.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	11655	
5°	11624	###
15°	12110	3482
25°	14187	6560
35°	15046	9193
45°	10171	7629
55°	2890	2810
65°	541	610
75°	81	91
85°	30	32
90°	0	



TEST NUMBER: P219474

CATALOG NUMBER: SSLED-LD5-36-W-UNV-L835-CD2-SA23-U

CANDELA DISTRIBUTION (FULL):

	0°
0°	11655.4
2.5°	11651.3
5°	11623.7
7.5°	11616.8
10°	11670.5
12.5°	11815.2
15°	12109.9
17.5°	12543.8
20°	13085.1
22.5°	13652.6
25°	14187.0
27.5°	14616.8
30°	14939.1
32.5°	15105.7
35°	15046.5
37.5°	14359.2
40°	13345.4
42.5°	12024.5
45°	10170.6
47.5°	8005.3
50°	5897.9
52.5°	4152.8
55°	2889.7
57.5°	2023.4
60°	1363.6
62.5°	900.8
65°	541.3
67.5°	294.8
70°	137.7
72.5°	97.8
75°	81.3
77.5°	67.5
80°	56.5
82.5°	45.5
85°	30.3
87.5°	15.2
90°	0.0

(END OF REPORT)