

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: METALUX

Report Number: P219476

Luminaire Tested: **SSLED-LD5-36-W-UNV-L850-CD2-SA23-U**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P219476
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27263)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: METALUX
Catalog Number: SSLED-LD5-36-W-UNV-L850-CD2-SA23-U
Description: METALUX ROUND HIGH BAY STEELER LED WITH WIDE DISTRIBUTION LENS WITH Rev.G BOARD. LENS DIFFUSE 2407, 7.5% BLEND. SHROUD ACCESSORY INSTALLED. FIXTURE CENTERED TO LEDS
Light Source: (240) 5000K CCT, 80 CRI LEDS
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 34773.7 lumens
Efficiency: N/A
Efficacy: 104.2 lumens/watt
Spacing Criteria (0/90/45): 1.7 / 1.7 / 1.49
Luminous Opening: Circular (Dia: 1.41' x H: 0')
CIE Type: Direct


Input Watts (W): 333.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219476

CATALOG NUMBER: SSLED-LD5-36-W-UNV-L850-CD2-SA23-U

Luminous Intensity Polar Plot

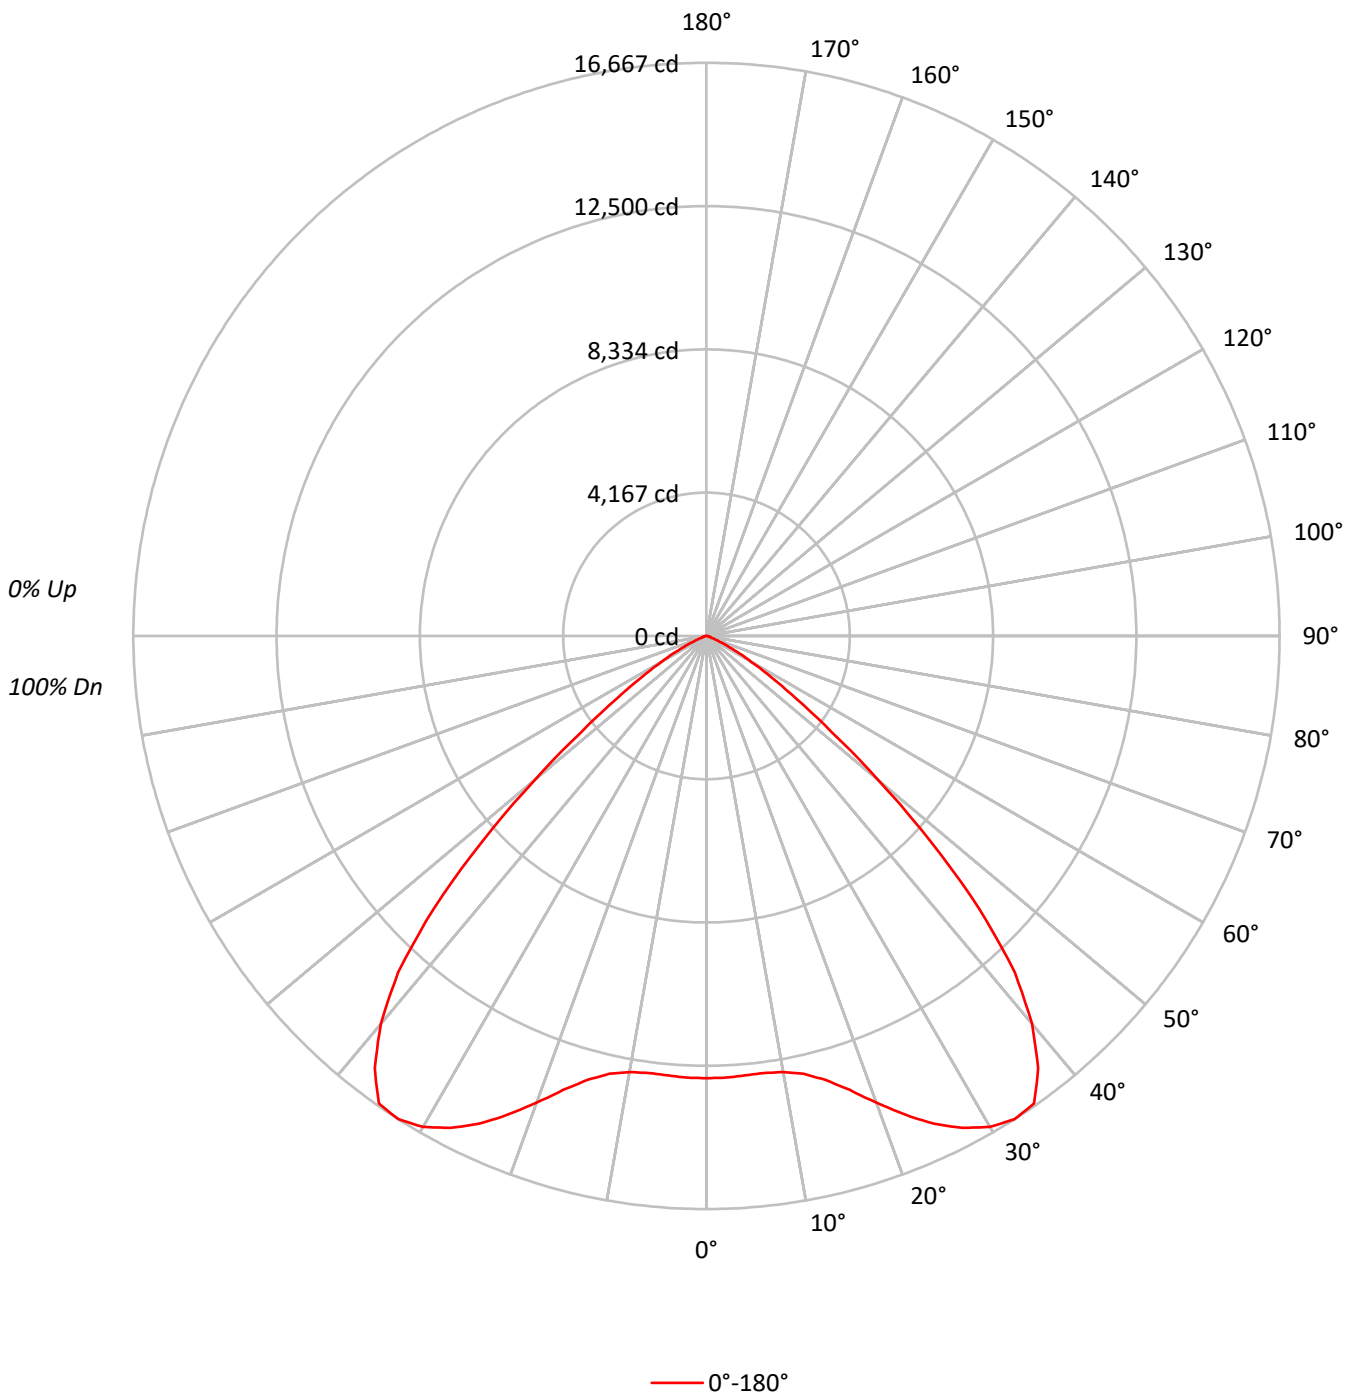



TEST NUMBER: P219476

CATALOG NUMBER: SSLED-LD5-36-W-UNV-L850-CD2-SA23-U

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90
2	104	98	93	88	102	96	91	87	93	89	85	90	86	83	87	84	82	80
3	97	88	82	77	94	87	81	76	84	79	75	81	77	73	79	75	72	70
4	90	80	72	67	88	78	72	67	76	70	66	74	69	65	72	68	64	62
5	83	72	65	59	81	71	64	59	69	63	58	67	62	58	66	61	57	55
6	77	66	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49
7	72	60	52	47	70	59	52	46	58	51	46	56	50	46	55	50	46	44
8	67	55	47	42	65	54	47	42	53	46	41	52	46	41	50	45	41	39
9	62	50	43	38	61	50	42	38	49	42	37	48	42	37	47	41	37	35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	88650
5°	88747
10°	90135
15°	95357
20°	105912
25°	119061
30°	131203
35°	139709
40°	132505
45°	109399
50°	69789
55°	38320
60°	20743
65°	9743
70°	3064
75°	2389
80°	2473
85°	2642



TEST NUMBER: P219476

CATALOG NUMBER: SSLED-LD5-36-W-UNV-L850-CD2-SA23-U

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1225.5	3.5
10°-20°	3842.1	11.0
20°-30°	7237.8	20.8
30°-40°	10142.7	29.2
40°-50°	8417.3	24.2
50°-60°	3100.0	8.9
60°-70°	672.5	1.9
70°-80°	100.0	0.3
80°-90°	35.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	12305.4	35.4
0°-40°	22448.0	64.6
0°-60°	33965.4	97.7
0°-90°	34773.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	34773.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12860	
5°	12825	###
15°	13361	3842
25°	15653	7238
35°	16602	10143
45°	11222	8417
55°	3188	3100
65°	597	673
75°	90	100
85°	33	36
90°	0	



TEST NUMBER: P219476

CATALOG NUMBER: SSLED-LD5-36-W-UNV-L850-CD2-SA23-U

CANDELA DISTRIBUTION (FULL):

	0°
0°	12859.9
2.5°	12855.3
5°	12825.0
7.5°	12817.4
10°	12876.6
12.5°	13036.2
15°	13361.4
17.5°	13840.1
20°	14437.4
22.5°	15063.5
25°	15653.2
27.5°	16127.3
30°	16482.9
32.5°	16666.8
35°	16601.5
37.5°	15843.1
40°	14724.6
42.5°	13267.2
45°	11221.6
47.5°	8832.6
50°	6507.5
52.5°	4582.0
55°	3188.4
57.5°	2232.5
60°	1504.5
62.5°	993.9
65°	597.3
67.5°	325.2
70°	152.0
72.5°	107.9
75°	89.7
77.5°	74.5
80°	62.3
82.5°	50.2
85°	33.4
87.5°	16.7
90°	0.0

(END OF REPORT)