

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229179

Luminaire Tested: **340-6B-10-D010 / 340-EU6B-1020-9024-6LBW1LI-CF**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229179
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-12)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-10-D010 / 340-EU6B-1020-9024-6LBW1LI-CF
Description: FARALLON 6" LED GLASS DOWNLIGHT. CYLINDRICAL FROSTED GLASS KIT.
Light Source: (1) 2400K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 524.6 lumens
Efficiency: N/A
Efficacy: 53.0 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.55
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229179

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9024-6LBW1LI-CF

Luminous Intensity Polar Plot

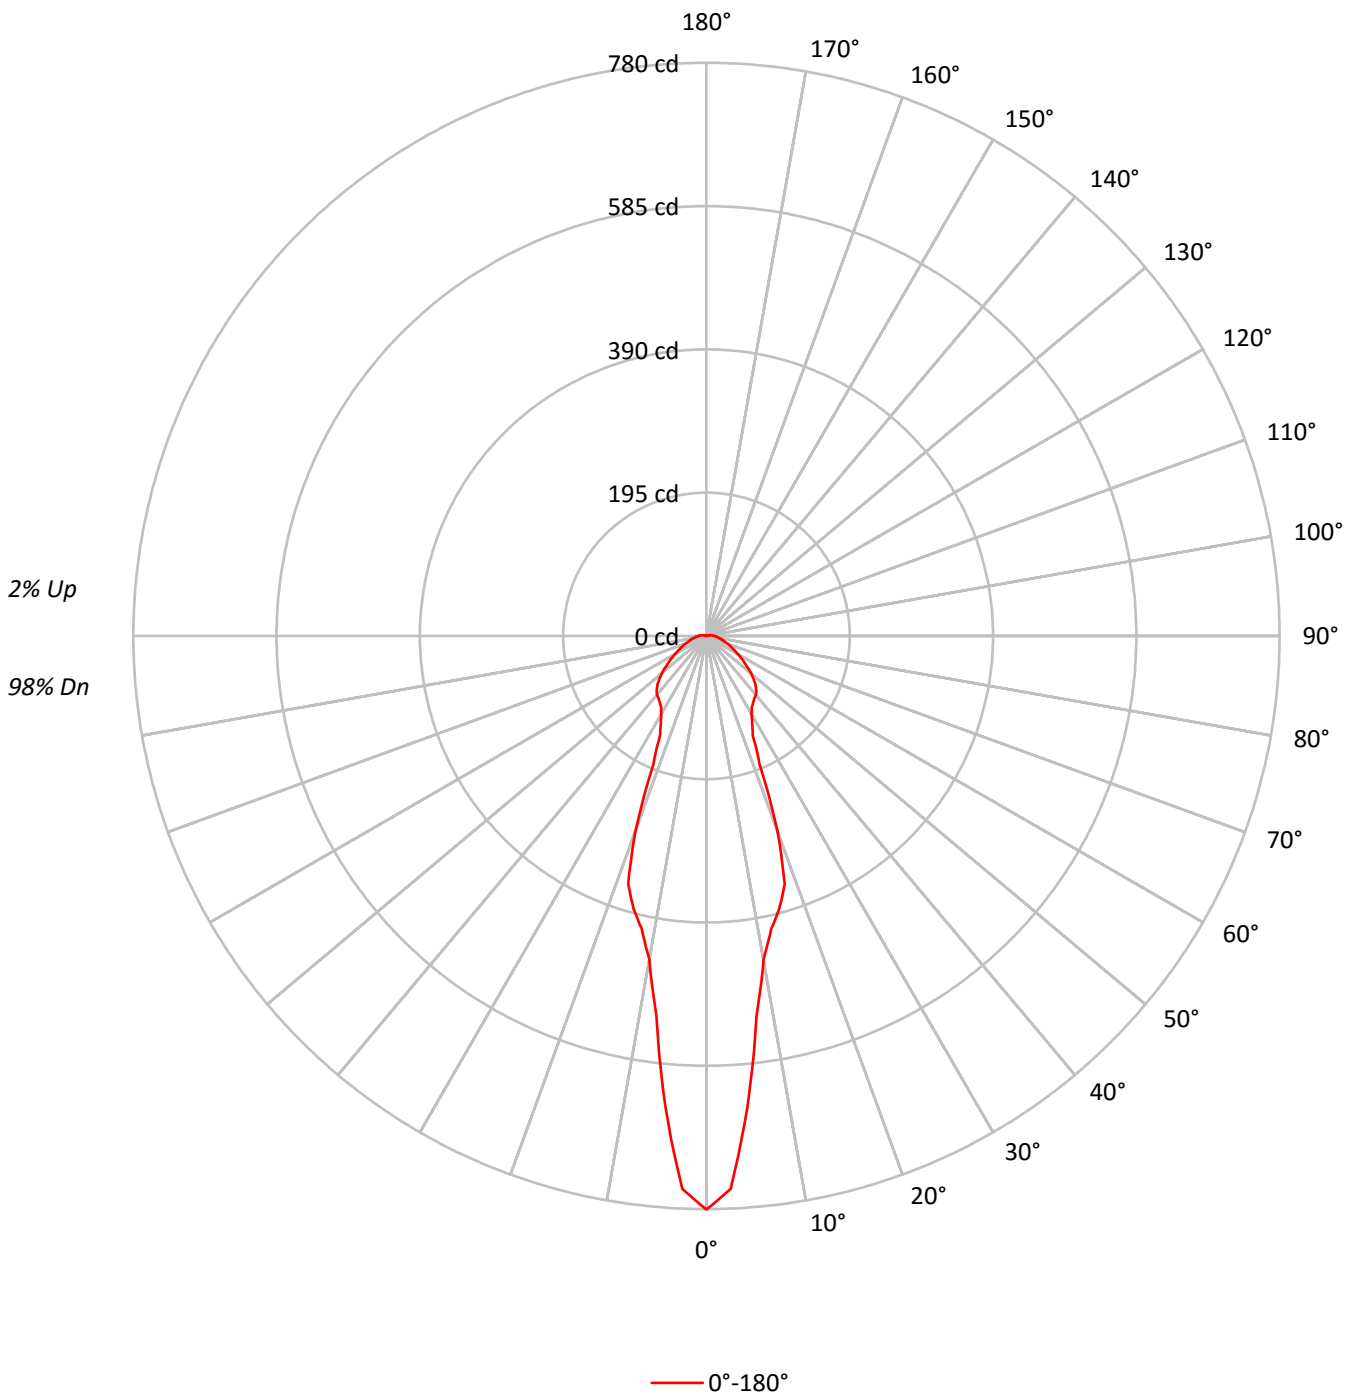



TEST NUMBER: P229179

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9024-6LBW1LI-CF

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	110	110	110		105	105	105		100	100	100	98
1	109	105	101	98	107	103	99	96	98	95	93		94	92	90		90	88	87	84
2	101	94	88	83	99	92	87	82	88	84	80		85	81	78		82	79	76	74
3	94	85	78	72	92	83	77	72	80	75	70		77	73	69		75	71	67	65
4	88	77	70	64	85	76	69	64	73	67	63		71	66	62		69	64	61	59
5	82	71	63	58	80	70	63	57	68	61	56		66	60	56		64	59	55	53
6	77	66	58	52	75	65	57	52	63	56	52		61	55	51		59	54	50	49
7	73	61	53	48	71	60	53	48	58	52	47		57	51	47		55	50	47	45
8	69	57	50	44	67	56	49	44	55	48	44		53	48	44		52	47	43	42
9	65	53	46	41	64	53	46	41	52	45	41		50	45	41		49	44	40	39
10	62	50	43	39	61	50	43	39	49	43	38		48	42	38		47	42	38	36

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	50920
5°	37574
10°	23890
15°	18989
20°	13096
25°	6581
30°	5182
35°	4516
40°	4164
45°	3690
50°	3071
55°	2432
60°	1929
65°	1525
70°	1192
75°	954
80°	785
85°	629



TEST NUMBER: P229179

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9024-6LBW1LI-CF

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.7	10.4
10°-20°	105.0	20.0
20°-30°	76.2	14.5
30°-40°	69.9	13.3
40°-50°	72.1	13.7
50°-60°	56.7	10.8
60°-70°	38.5	7.3
70°-80°	24.7	4.7
80°-90°	15.3	2.9
90°-100°	8.9	1.7
100°-110°	2.6	0.5
110°-120°	0.1	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	235.8	45.0
0°-40°	305.7	58.3
0°-60°	434.5	82.8
0°-90°	513.0	97.8
90°-120°	11.6	2.2
90°-150°	11.6	2.2
90°-180°	12.0	2.3
0°-180°	524.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	780	
5°	642	55
15°	384	105
25°	149	76
35°	111	70
45°	94	72
55°	63	57
65°	39	39
75°	23	25
85°	14	12
90°	10	6
95°	8	6
105°	2	3
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229179

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9024-6LBW1LI-CF

CANDELA DISTRIBUTION (FULL):

0°	
0°	780.5
2.5°	753.3
5°	642.0
7.5°	521.5
10°	447.1
12.5°	407.8
15°	383.6
17.5°	354.0
20°	282.0
22.5°	188.8
25°	149.4
27.5°	134.3
30°	122.8
32.5°	115.0
35°	110.7
37.5°	107.1
40°	104.7
42.5°	100.4
45°	94.4
47.5°	87.1
50°	79.3
52.5°	70.8
55°	62.9
57.5°	55.7
60°	49.6
62.5°	43.6
65°	38.7
67.5°	33.9
70°	29.6
72.5°	26.0
75°	23.0
77.5°	20.6
80°	18.2
82.5°	15.7
85°	13.9
87.5°	12.1
90°	10.3
92.5°	9.7
95°	8.5
97.5°	6.7
100°	4.8
102.5°	3.6
105°	2.4
107.5°	1.2
110°	0.6



TEST NUMBER: P229179

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9024-6LBW1LI-CF

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)