

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: SHAPER

Report Number: P229267

Luminaire Tested: **340-6B-10-D010 / 340-EU6B-1020-9027-6LBW1LI-GFC**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P229267  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-15)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: SHAPER  
Catalog Number: 340-6B-10-D010 / 340-EU6B-1020-9027-6LBW1LI-GFC  
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, FROSTED INSIDE, CLEAR OUTSIDE GLASS KIT.  
Light Source: (1) 2700K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 604.8 lumens  
Efficiency: N/A  
Efficacy: 61.1 lumens/watt  
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.74  
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P229267

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9027-6LBW1LI-GFC

### Luminous Intensity Polar Plot

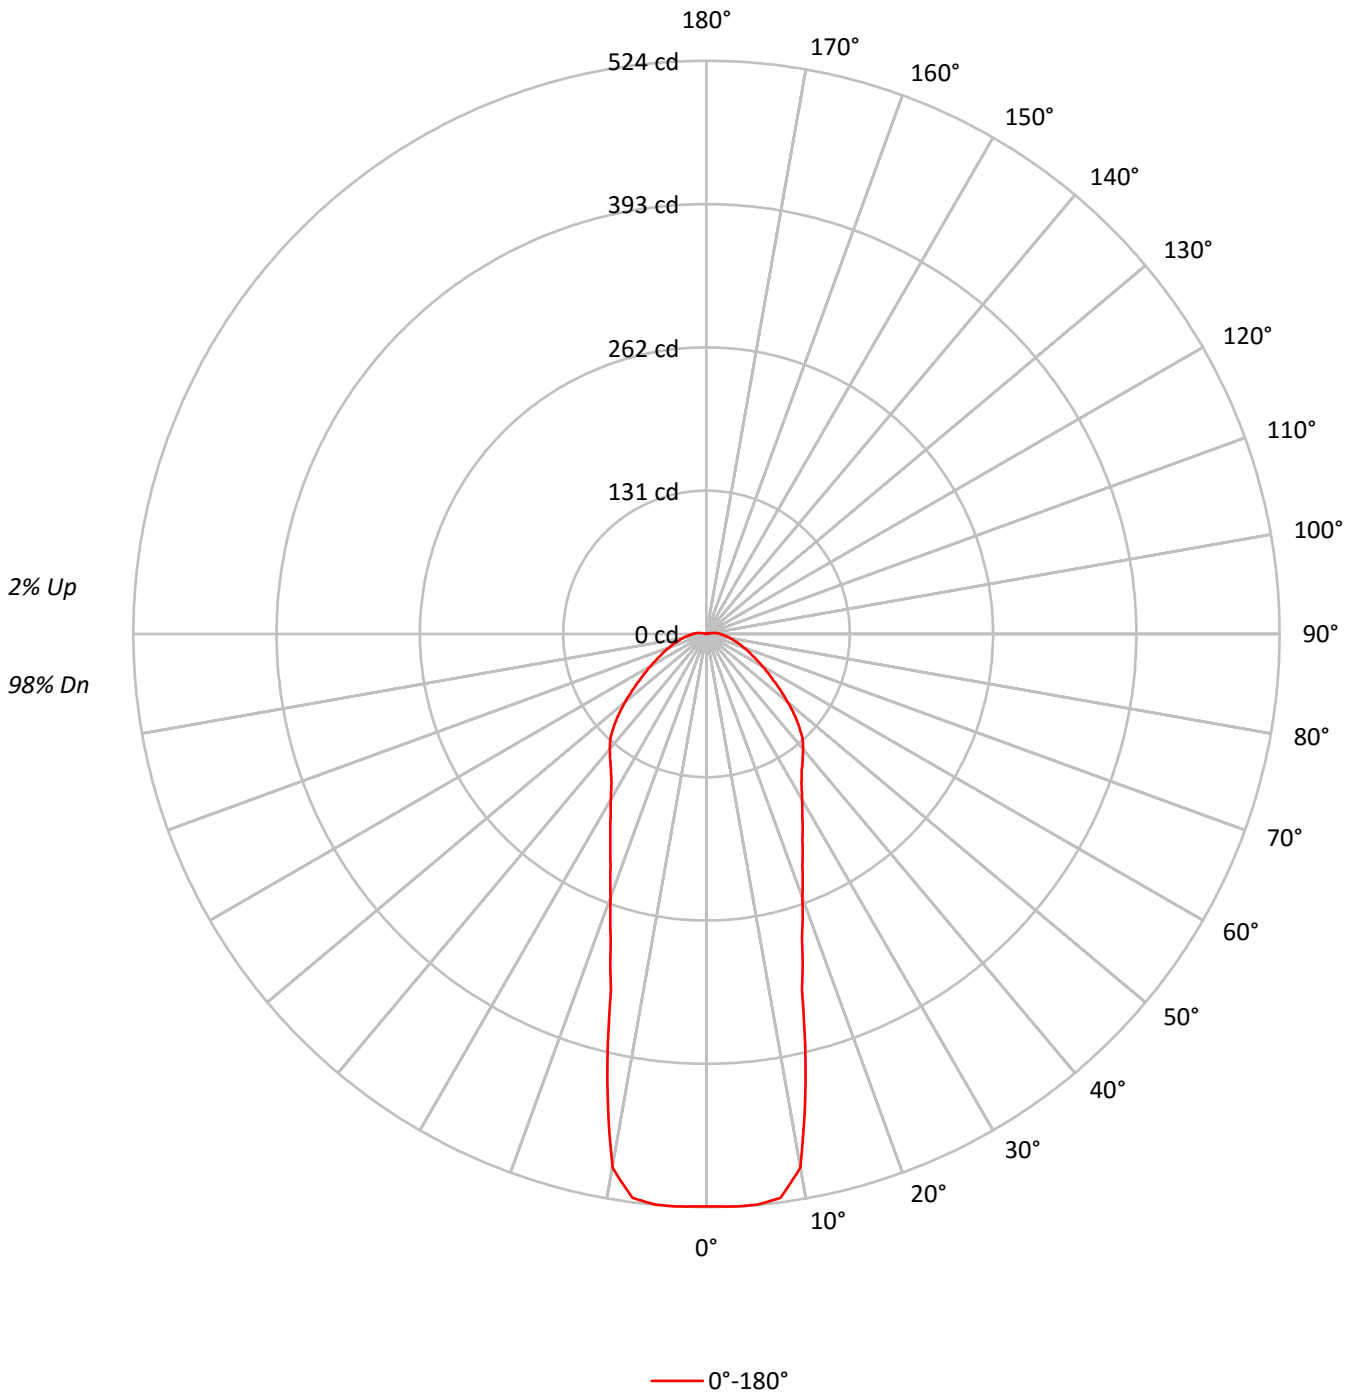



TEST NUMBER: P229267

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9027-6LBW1LI-GFC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	110	110	110		105	105	105		100	100	100	98
1	109	105	101	97	106	102	99	96	98	95	92		94	91	89		90	88	86	84
2	101	93	87	82	98	91	86	81	88	83	79		84	80	77		81	78	75	73
3	93	84	76	71	91	82	75	70	79	73	69		76	71	67		73	69	66	64
4	86	76	68	62	84	74	67	61	72	65	60		69	64	60		67	62	59	57
5	81	69	61	55	78	68	60	55	66	59	54		64	58	53		62	57	53	51
6	75	63	55	50	73	62	55	49	60	54	49		59	53	48		57	52	48	46
7	71	58	51	45	69	58	50	45	56	49	44		54	49	44		53	48	44	42
8	66	54	47	41	65	54	46	41	52	46	41		51	45	41		50	44	40	38
9	63	51	43	38	61	50	43	38	49	42	38		48	42	37		47	41	37	36
10	59	47	40	35	58	47	40	35	46	39	35		45	39	35		44	38	35	33

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	34140
5°	30668
10°	26455
15°	16682
20°	11912
25°	9149
30°	7372
35°	6201
40°	5469
45°	4680
50°	3756
55°	2922
60°	2298
65°	1817
70°	1466
75°	1170
80°	949
85°	746



TEST NUMBER: P229267

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9027-6LBW1LI-GFC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	49.3	8.1
10°-20°	97.3	16.1
20°-30°	96.4	15.9
30°-40°	96.0	15.9
40°-50°	91.7	15.2
50°-60°	68.4	11.3
60°-70°	46.4	7.7
70°-80°	30.2	5.0
80°-90°	18.4	3.0
90°-100°	9.6	1.6
100°-110°	1.3	0.2
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	242.9	40.2
0°-40°	338.9	56.0
0°-60°	498.9	82.5
0°-90°	593.9	98.2
90°-120°	10.9	1.8
90°-150°	10.9	1.8
90°-180°	11.0	1.8
0°-180°	604.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	523	
5°	524	49
15°	337	97
25°	208	96
35°	152	96
45°	120	92
55°	76	68
65°	46	46
75°	28	30
85°	16	15
90°	12	7
95°	9	6
105°	1	1
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229267

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9027-6LBW1LI-GFC

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	523.3
2.5°	524.0
5°	524.0
7.5°	519.9
10°	495.1
12.5°	418.8
15°	337.0
17.5°	290.9
20°	256.5
22.5°	229.0
25°	207.7
27.5°	189.8
30°	174.7
32.5°	161.6
35°	152.0
37.5°	144.4
40°	137.5
42.5°	130.0
45°	119.7
47.5°	108.7
50°	97.0
52.5°	86.0
55°	75.6
57.5°	66.7
60°	59.1
62.5°	52.3
65°	46.1
67.5°	41.3
70°	36.4
72.5°	32.3
75°	28.2
77.5°	24.8
80°	22.0
82.5°	19.3
85°	16.5
87.5°	14.4
90°	12.4
92.5°	11.0
95°	8.9
97.5°	6.9
100°	4.1
102.5°	2.1
105°	0.7
107.5°	0.0
110°	0.0



TEST NUMBER: P229267

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9027-6LBW1LI-GFC

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)