

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: SHAPER

Report Number: P229297

Luminaire Tested: **340-6B-10-D010 / 340-EU6B-1020-9030-6LBW1LI-GCC**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P229297  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-16)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: SHAPER  
Catalog Number: 340-6B-10-D010 / 340-EU6B-1020-9030-6LBW1LI-GCC  
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE,  
CLEAR OUTSIDE GLASS KIT.  
Light Source: (1) 3000K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 710.2 lumens  
Efficiency: N/A  
Efficacy: 71.7 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.89  
Luminous Opening: Circular (Dia: 0.46' x H: 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P229297

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9030-6LBW1LI-GCC

### Luminous Intensity Polar Plot

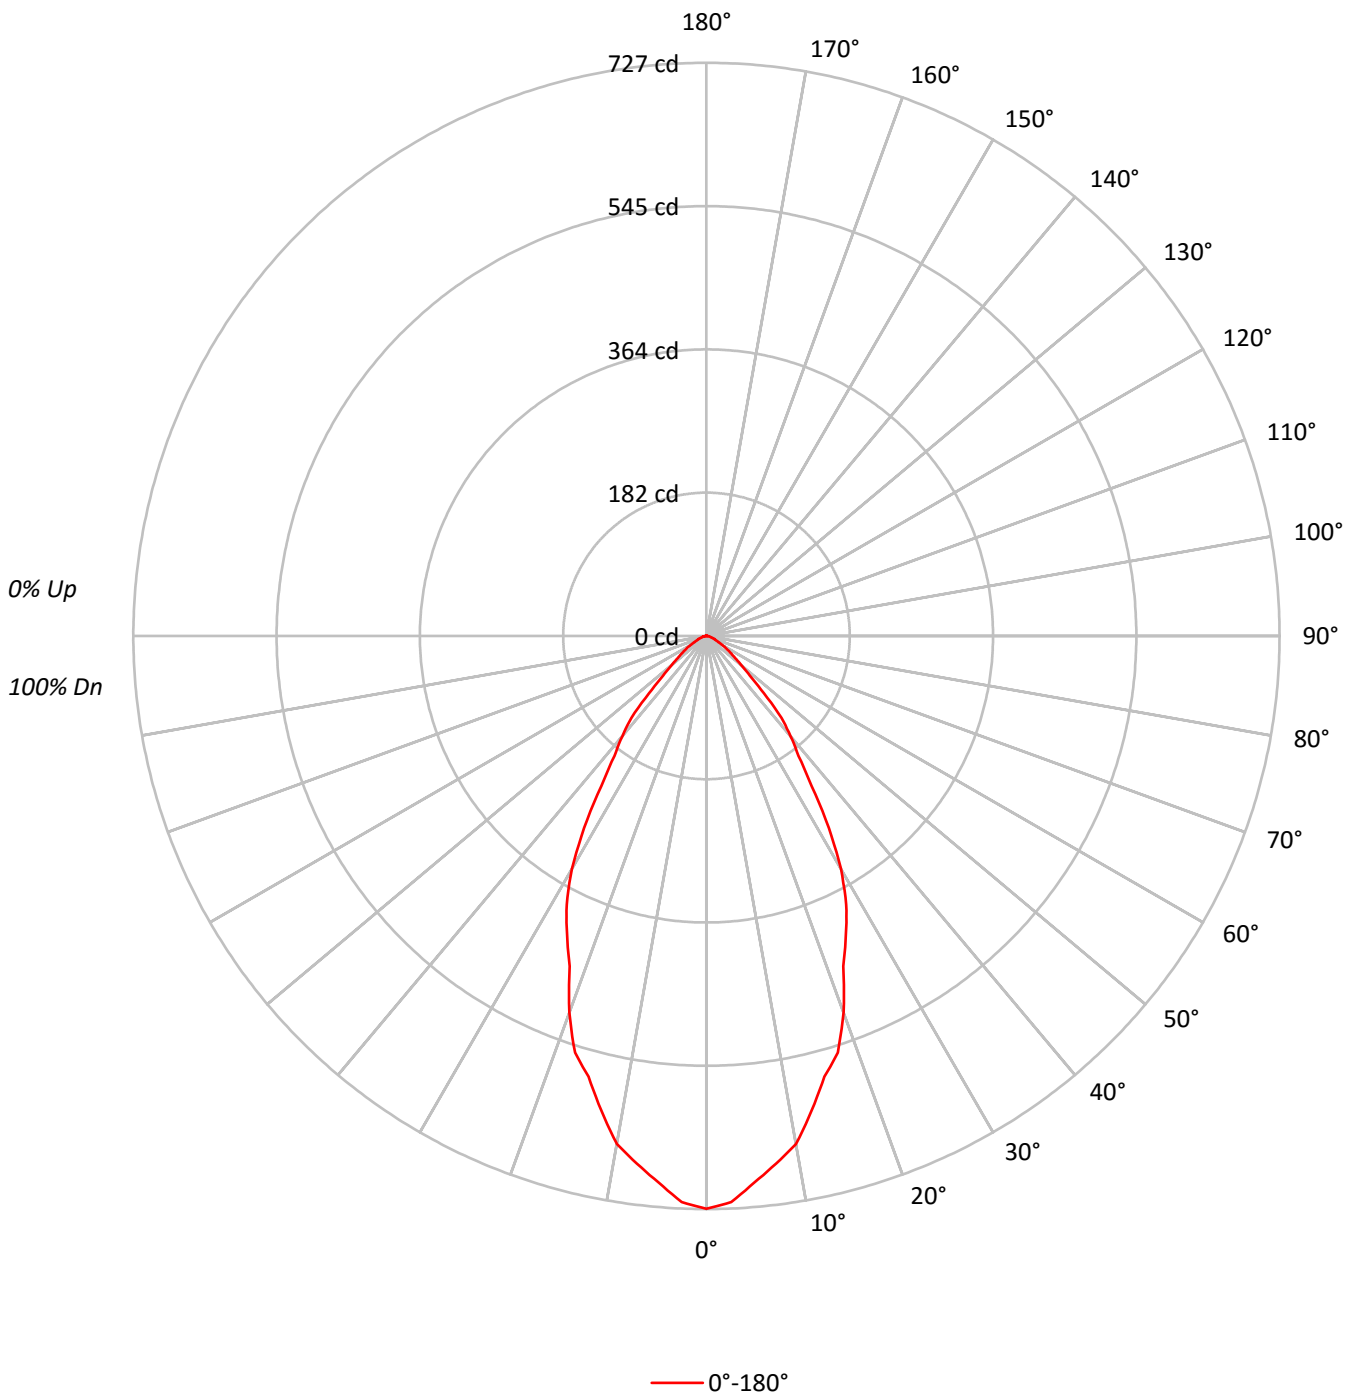



TEST NUMBER: P229297

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9030-6LBW1LI-GCC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	95	93	92
2	106	101	96	92	104	99	95	91	96	92	89		92	90	87		90	87	85	83
3	100	93	87	83	98	91	86	82	88	84	81		86	82	79		84	81	78	76
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78	75	71	70
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69	64	61	59
7	79	69	62	58	78	68	62	57	67	61	57		66	60	57		64	60	56	55
8	75	64	58	53	74	64	58	53	63	57	53		62	56	53		61	56	52	51
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57	52	49	48
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54	49	46	44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	47404
5°	45574
10°	43352
15°	39080
20°	35304
25°	30119
30°	25704
35°	18509
40°	14129
45°	9503
50°	5877
55°	4231
60°	3079
65°	2099
70°	1774
75°	1437
80°	1353
85°	1048



TEST NUMBER: P229297

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9030-6LBW1LI-GCC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	65.2	9.2
10°-20°	163.2	23.0
20°-30°	192.4	27.1
30°-40°	149.6	21.1
40°-50°	82.0	11.6
50°-60°	34.2	4.8
60°-70°	14.5	2.0
70°-80°	6.2	0.9
80°-90°	1.7	0.2
90°-100°	0.8	0.1
100°-110°	0.5	0.1
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	420.8	59.2
0°-40°	570.3	80.3
0°-60°	686.6	96.7
0°-90°	709.0	99.8
90°-120°	1.2	0.2
90°-150°	1.2	0.2
90°-180°	1.0	0.1
0°-180°	710.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	727	
5°	696	65
15°	579	163
25°	418	192
35°	232	150
45°	103	82
55°	37	34
65°	14	14
75°	6	6
85°	1	2
90°	1	0
95°	1	1
105°	1	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229297

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9030-6LBW1LI-GCC

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	726.6
2.5°	718.8
5°	695.9
7.5°	675.1
10°	654.4
12.5°	616.5
15°	578.6
17.5°	554.3
20°	508.5
22.5°	453.4
25°	418.4
27.5°	384.1
30°	341.2
32.5°	288.9
35°	232.4
37.5°	191.7
40°	165.9
42.5°	140.9
45°	103.0
47.5°	74.4
50°	57.9
52.5°	45.8
55°	37.2
57.5°	30.0
60°	23.6
62.5°	17.2
65°	13.6
67.5°	11.4
70°	9.3
72.5°	7.2
75°	5.7
77.5°	4.3
80°	3.6
82.5°	2.1
85°	1.4
87.5°	0.7
90°	0.7
92.5°	0.7
95°	0.7
97.5°	0.7
100°	0.7
102.5°	0.7
105°	0.7
107.5°	0.0
110°	0.0



TEST NUMBER: P229297

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9030-6LBW1LI-GCC

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)