

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229211

Luminaire Tested: **340-6B-10-D010 / 340-EU6B-1020-9035-6LBW1LI-CQ**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229211
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-13)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-10-D010 / 340-EU6B-1020-9035-6LBW1LI-CQ
Description: FARALLON 6" LED GLASS DOWNLIGHT CYLINDRICAL FROSTED, QUADRATE ETCHED GLASS KIT.
Light Source: (1) 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 621.4 lumens
Efficiency: N/A
Efficacy: 62.8 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.54
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229211

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9035-6LBW1LI-CQ

Luminous Intensity Polar Plot

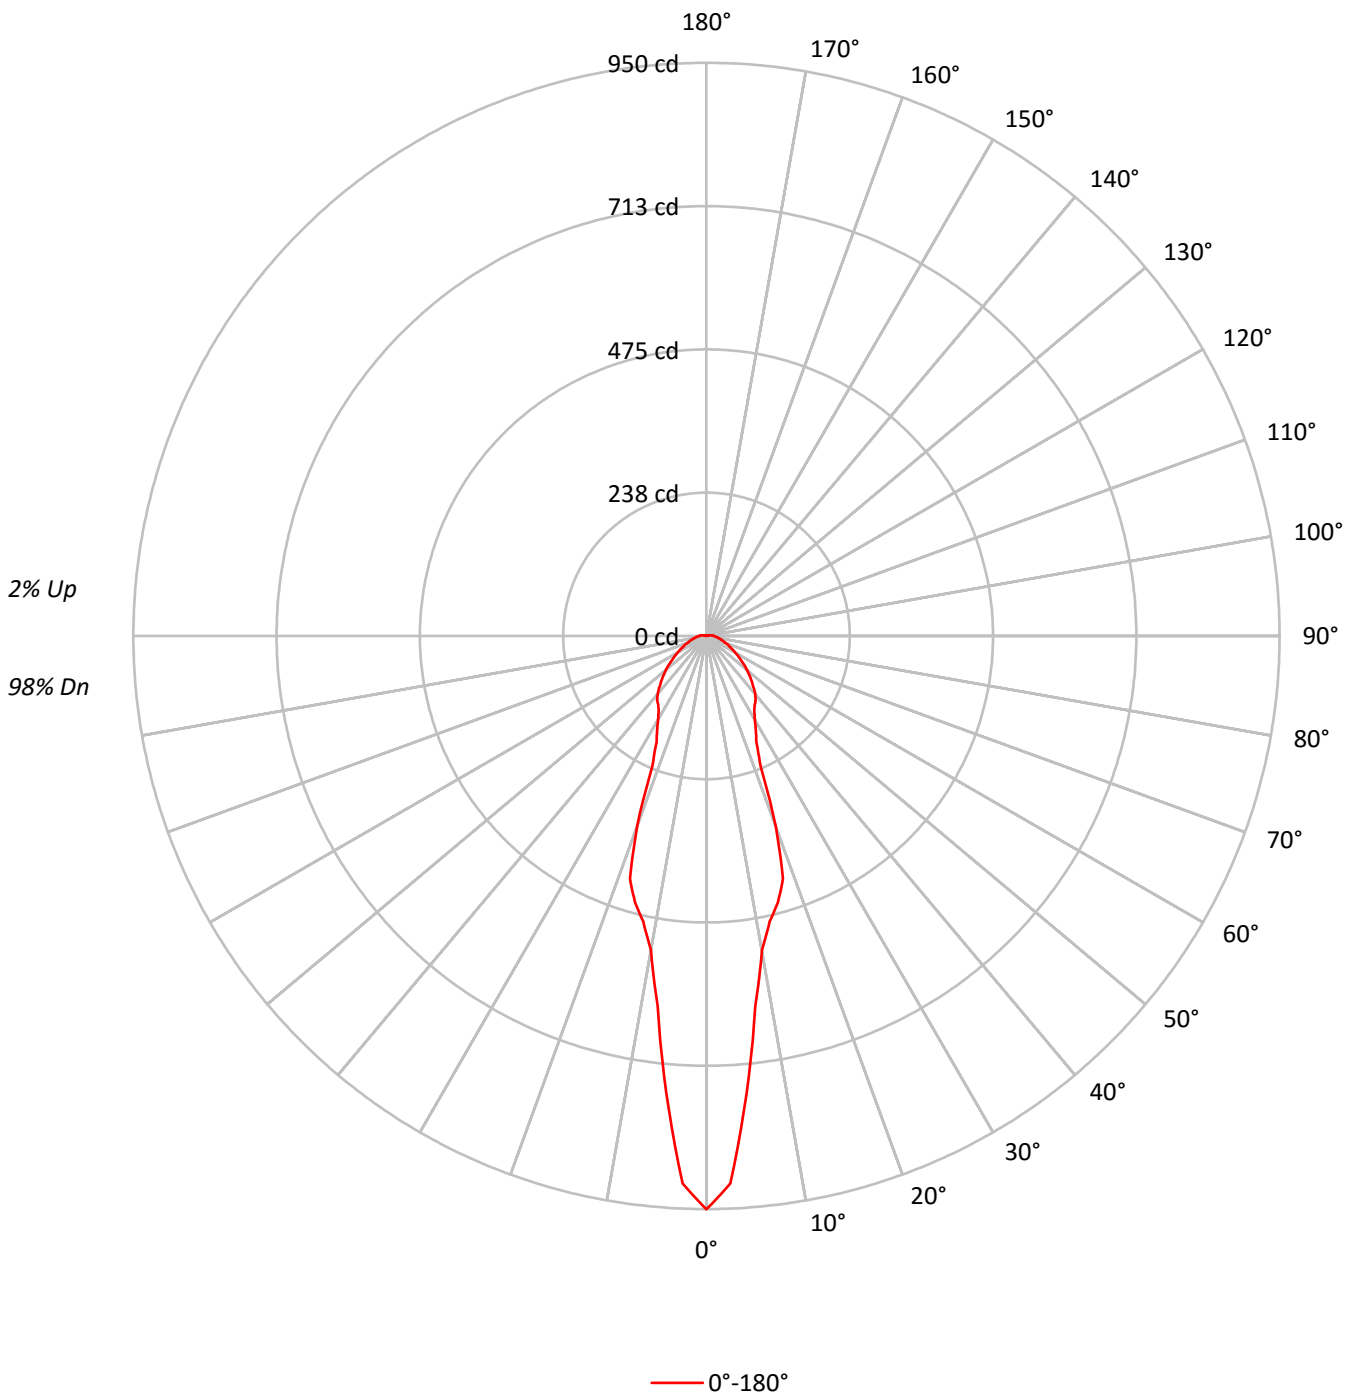



TEST NUMBER: P229211

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9035-6LBW1LI-CQ

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	110	110	110		105	105	105		100	100	100	98
1	110	105	102	98	107	103	100	97	98	96	93		94	92	90		90	89	87	85
2	102	95	89	84	99	93	87	83	89	84	81		85	82	78		82	79	76	74
3	95	86	79	73	92	84	78	72	81	75	71		78	73	70		75	71	68	66
4	88	78	71	65	86	77	70	64	74	68	63		72	67	62		69	65	61	59
5	83	72	64	58	81	71	63	58	68	62	57		66	61	57		64	60	56	54
6	78	66	59	53	76	65	58	53	63	57	52		62	56	52		60	55	51	49
7	73	62	54	49	71	61	54	49	59	53	48		58	52	48		56	51	47	46
8	69	58	50	45	68	57	50	45	55	49	45		54	48	44		53	48	44	42
9	66	54	47	42	64	53	47	42	52	46	42		51	45	41		50	45	41	40
10	62	51	44	40	61	50	44	39	49	43	39		48	43	39		47	42	39	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	62005
5°	44538
10°	28261
15°	22627
20°	15566
25°	8629
30°	6764
35°	5683
40°	4992
45°	4140
50°	3400
55°	2691
60°	2142
65°	1687
70°	1345
75°	1083
80°	875
85°	724



TEST NUMBER: P229211

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9035-6LBW1LI-CQ

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.0	10.5
10°-20°	124.8	20.1
20°-30°	96.9	15.6
30°-40°	88.1	14.2
40°-50°	81.8	13.2
50°-60°	62.9	10.1
60°-70°	43.1	6.9
70°-80°	27.9	4.5
80°-90°	17.4	2.8
90°-100°	10.1	1.6
100°-110°	3.2	0.5
110°-120°	0.1	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	286.7	46.1
0°-40°	374.9	60.3
0°-60°	519.6	83.6
0°-90°	608.0	97.8
90°-120°	13.4	2.2
90°-150°	13.4	2.2
90°-180°	13.0	2.1
0°-180°	621.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	950	
5°	761	65
15°	457	125
25°	196	97
35°	139	88
45°	106	82
55°	70	63
65°	43	43
75°	26	28
85°	16	14
90°	12	7
95°	9	7
105°	3	3
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229211

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9035-6LBW1LI-CQ

CANDELA DISTRIBUTION (FULL):

0°	
0°	950.4
2.5°	908.3
5°	761.0
7.5°	618.8
10°	528.9
12.5°	484.6
15°	457.1
17.5°	421.5
20°	335.2
22.5°	234.3
25°	195.9
27.5°	177.0
30°	160.3
32.5°	147.3
35°	139.3
37.5°	134.2
40°	125.5
42.5°	115.4
45°	105.9
47.5°	96.5
50°	87.8
52.5°	78.4
55°	69.6
57.5°	62.4
60°	55.1
62.5°	48.6
65°	42.8
67.5°	38.5
70°	33.4
72.5°	29.7
75°	26.1
77.5°	23.2
80°	20.3
82.5°	18.1
85°	16.0
87.5°	13.8
90°	11.6
92.5°	10.9
95°	9.4
97.5°	8.0
100°	5.8
102.5°	4.4
105°	2.9
107.5°	1.5
110°	0.7



TEST NUMBER: P229211

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9035-6LBW1LI-CQ

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)