

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: SHAPER

Report Number: P229298

Luminaire Tested: **340-6B-10-D010 / 340-EU6B-1020-9035-6LBW1LI-GCC**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P229298  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-16)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: SHAPER  
Catalog Number: 340-6B-10-D010 / 340-EU6B-1020-9035-6LBW1LI-GCC  
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE,  
CLEAR OUTSIDE GLASS KIT.  
Light Source: (1) 3500K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 720.4 lumens  
Efficiency: N/A  
Efficacy: 72.8 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.89  
Luminous Opening: Circular (Dia: 0.46' x H: 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P229298

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9035-6LBW1LI-GCC

### Luminous Intensity Polar Plot

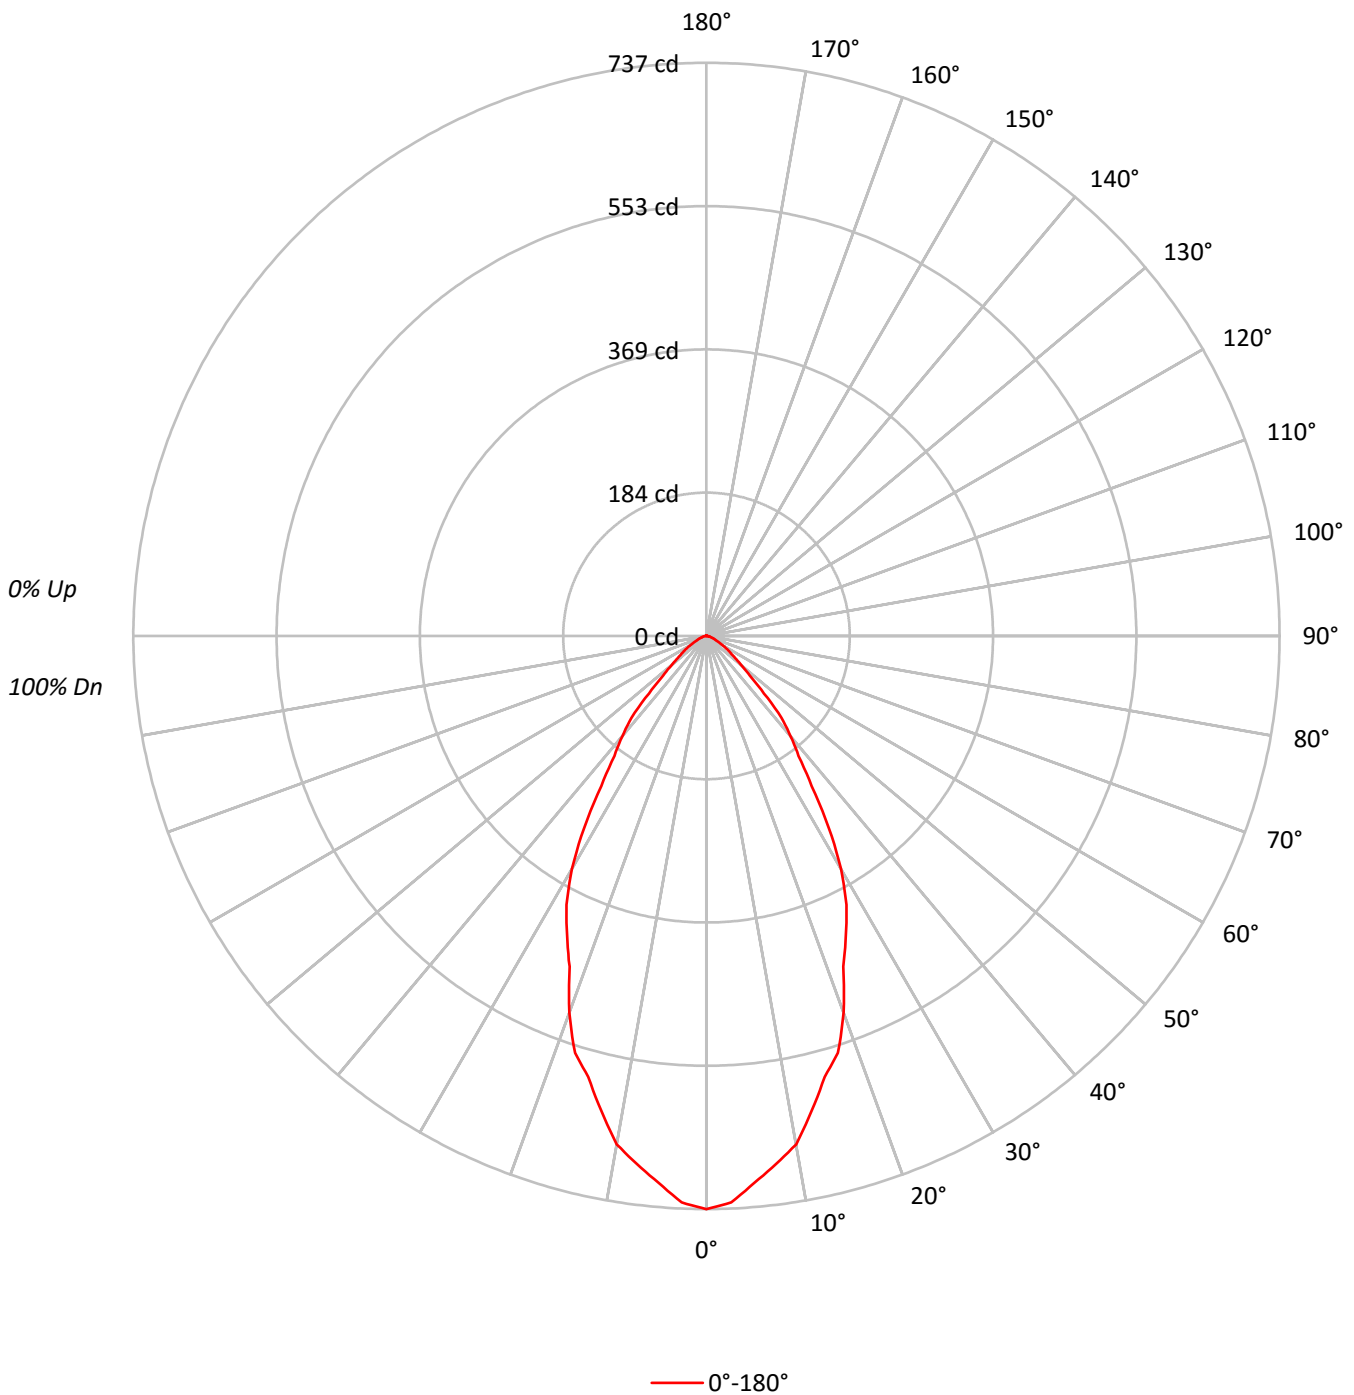



TEST NUMBER: P229298

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9035-6LBW1LI-GCC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	95	93	92
2	106	101	96	92	104	99	95	91	96	92	89		92	90	87		90	87	85	83
3	100	93	87	83	98	91	86	82	88	84	81		86	82	79		84	81	78	76
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78	75	71	70
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69	64	61	59
7	79	69	62	58	78	68	62	57	67	61	57		66	60	57		64	60	56	55
8	75	64	58	53	74	64	58	53	63	57	53		62	56	53		61	56	52	51
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57	52	49	48
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54	49	46	44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	48089
5°	46229
10°	43975
15°	39640
20°	35811
25°	30550
30°	26073
35°	18780
40°	14333
45°	9642
50°	5968
55°	4288
60°	3119
65°	2130
70°	1793
75°	1462
80°	1353
85°	1123



TEST NUMBER: P229298

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9035-6LBW1LI-GCC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	66.1	9.2
10°-20°	165.5	23.0
20°-30°	195.1	27.1
30°-40°	151.7	21.1
40°-50°	83.2	11.6
50°-60°	34.7	4.8
60°-70°	14.7	2.0
70°-80°	6.3	0.9
80°-90°	1.8	0.2
90°-100°	0.8	0.1
100°-110°	0.5	0.1
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	426.8	59.2
0°-40°	578.5	80.3
0°-60°	696.4	96.7
0°-90°	719.2	99.8
90°-120°	1.2	0.2
90°-150°	1.2	0.2
90°-180°	1.0	0.1
0°-180°	720.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	737	
5°	706	66
15°	587	166
25°	424	195
35°	236	152
45°	104	83
55°	38	35
65°	14	15
75°	6	6
85°	2	2
90°	1	0
95°	1	1
105°	1	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229298

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9035-6LBW1LI-GCC

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	737.1
2.5°	729.1
5°	705.9
7.5°	684.9
10°	663.8
12.5°	625.4
15°	586.9
17.5°	562.2
20°	515.8
22.5°	460.0
25°	424.4
27.5°	389.6
30°	346.1
32.5°	293.1
35°	235.8
37.5°	194.4
40°	168.3
42.5°	142.9
45°	104.5
47.5°	75.4
50°	58.8
52.5°	46.4
55°	37.7
57.5°	30.5
60°	23.9
62.5°	17.4
65°	13.8
67.5°	11.6
70°	9.4
72.5°	7.3
75°	5.8
77.5°	4.4
80°	3.6
82.5°	2.2
85°	1.5
87.5°	0.7
90°	0.7
92.5°	0.7
95°	0.7
97.5°	0.7
100°	0.7
102.5°	0.7
105°	0.7
107.5°	0.0
110°	0.0



TEST NUMBER: P229298

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9035-6LBW1LI-GCC

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)