

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229299

Luminaire Tested: **340-6B-10-D010 / 340-EU6B-1020-9040-6LBW1LI-GCC**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229299
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-16)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-10-D010 / 340-EU6B-1020-9040-6LBW1LI-GCC
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE,
CLEAR OUTSIDE GLASS KIT.
Light Source: (1) 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 721.5 lumens
Efficiency: N/A
Efficacy: 72.9 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.89
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229299

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9040-6LBW1LI-GCC

Luminous Intensity Polar Plot

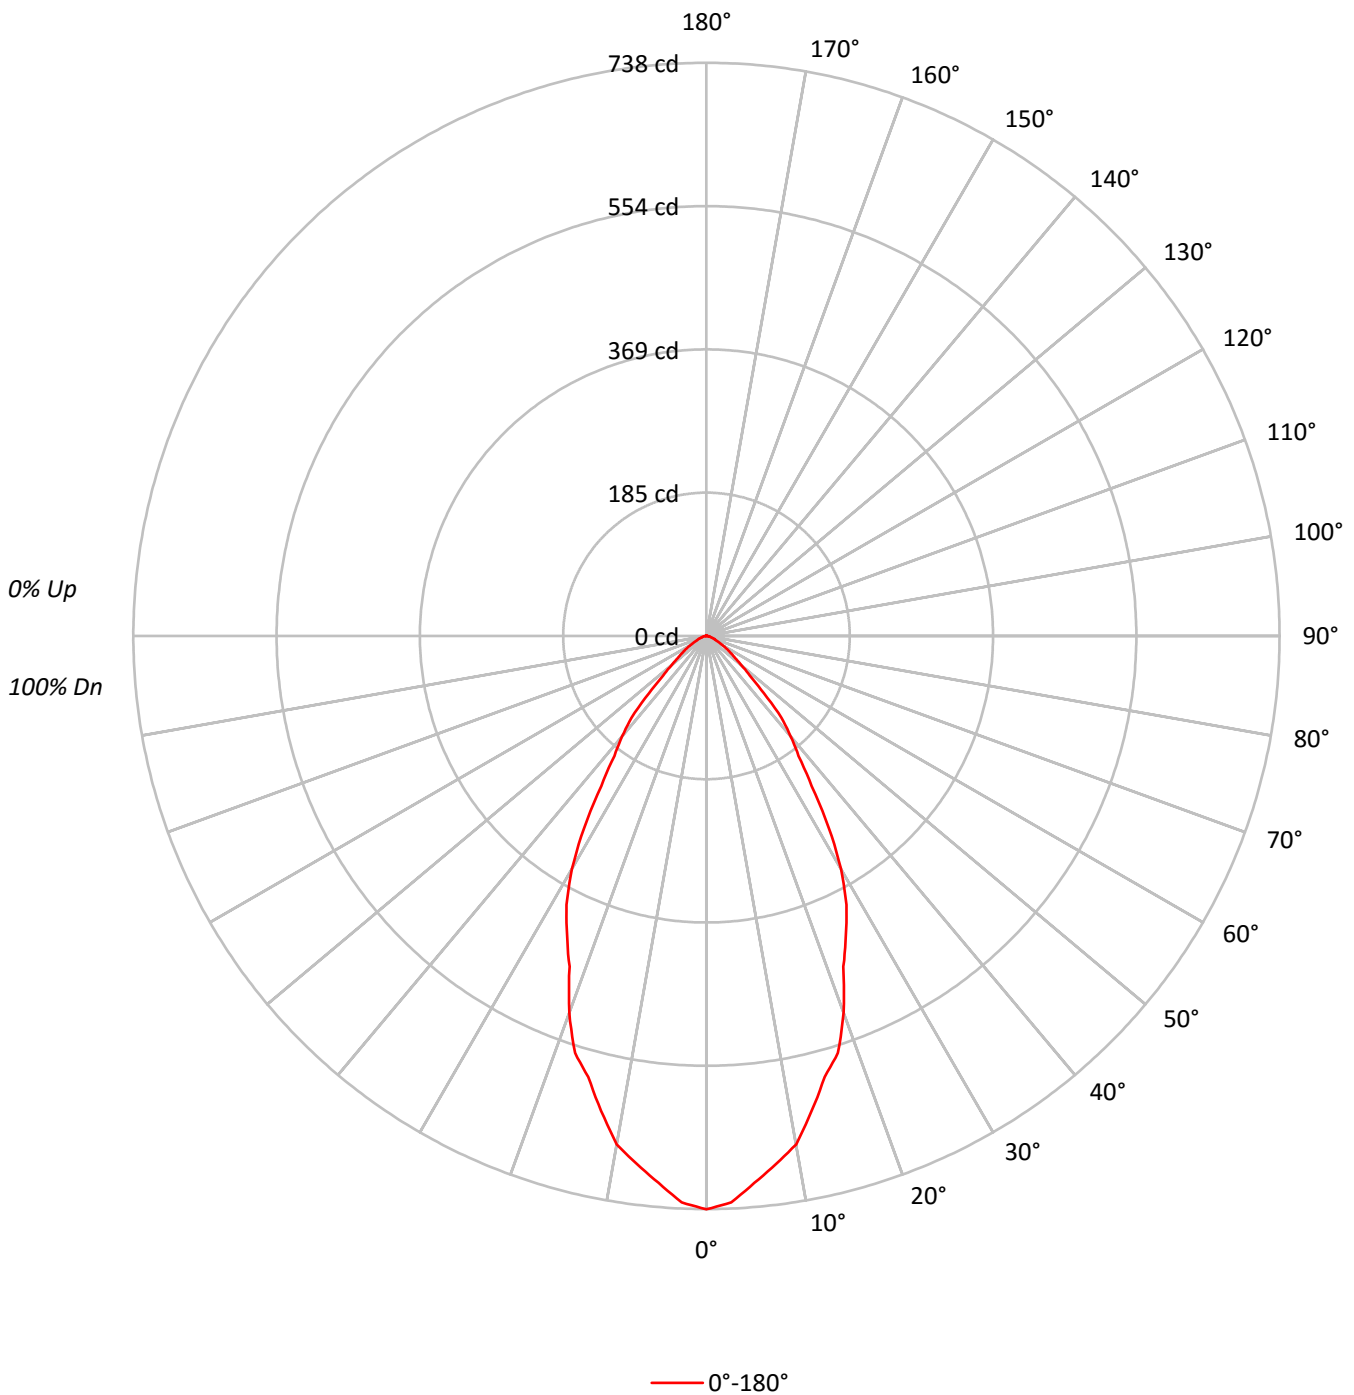



TEST NUMBER: P229299

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9040-6LBW1LI-GCC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	95	93	92
2	106	101	96	92	104	99	95	91	96	92	89		92	90	87		90	87	85	83
3	100	93	87	83	98	91	86	82	88	84	81		86	82	79		84	81	78	76
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78	75	71	70
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69	64	61	59
7	79	69	62	58	78	68	62	57	67	61	57		66	60	57		64	60	56	55
8	75	64	58	53	74	64	58	53	63	57	53		62	56	53		61	56	52	51
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57	52	49	48
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54	49	46	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	48161
5°	46301
10°	44041
15°	39701
20°	35866
25°	30594
30°	26111
35°	18804
40°	14359
45°	9651
50°	5978
55°	4300
60°	3132
65°	2130
70°	1793
75°	1462
80°	1353
85°	1123



TEST NUMBER: P229299

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9040-6LBW1LI-GCC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.2	9.2
10°-20°	165.8	23.0
20°-30°	195.4	27.1
30°-40°	151.9	21.1
40°-50°	83.4	11.6
50°-60°	34.8	4.8
60°-70°	14.7	2.0
70°-80°	6.3	0.9
80°-90°	1.8	0.2
90°-100°	0.8	0.1
100°-110°	0.5	0.1
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	427.5	59.2
0°-40°	579.4	80.3
0°-60°	697.5	96.7
0°-90°	720.3	99.8
90°-120°	1.2	0.2
90°-150°	1.2	0.2
90°-180°	1.0	0.1
0°-180°	721.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	738	
5°	707	66
15°	588	166
25°	425	195
35°	236	152
45°	105	83
55°	38	35
65°	14	15
75°	6	6
85°	2	2
90°	1	0
95°	1	1
105°	1	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229299

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9040-6LBW1LI-GCC

CANDELA DISTRIBUTION (FULL):

0°	
0°	738.2
2.5°	730.2
5°	707.0
7.5°	685.9
10°	664.8
12.5°	626.3
15°	587.8
17.5°	563.1
20°	516.6
22.5°	460.7
25°	425.0
27.5°	390.2
30°	346.6
32.5°	293.5
35°	236.1
37.5°	194.7
40°	168.6
42.5°	143.1
45°	104.6
47.5°	75.6
50°	58.9
52.5°	46.5
55°	37.8
57.5°	30.5
60°	24.0
62.5°	17.4
65°	13.8
67.5°	11.6
70°	9.4
72.5°	7.3
75°	5.8
77.5°	4.4
80°	3.6
82.5°	2.2
85°	1.5
87.5°	0.7
90°	0.7
92.5°	0.7
95°	0.7
97.5°	0.7
100°	0.7
102.5°	0.7
105°	0.7
107.5°	0.0
110°	0.0



TEST NUMBER: P229299

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9040-6LBW1LI-GCC

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)