

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229216

Luminaire Tested: **340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-CQ**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229216
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-13)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-CQ
Description: FARALLON 6" LED GLASS DOWNLIGHT CYLINDRICAL FROSTED, QUADRATE ETCHED GLASS KIT.
Light Source: (1) 3000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 844.4 lumens
Efficiency: N/A
Efficacy: 59.9 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.54
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct


Input Watts (W): 14.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229216

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-CQ

Luminous Intensity Polar Plot

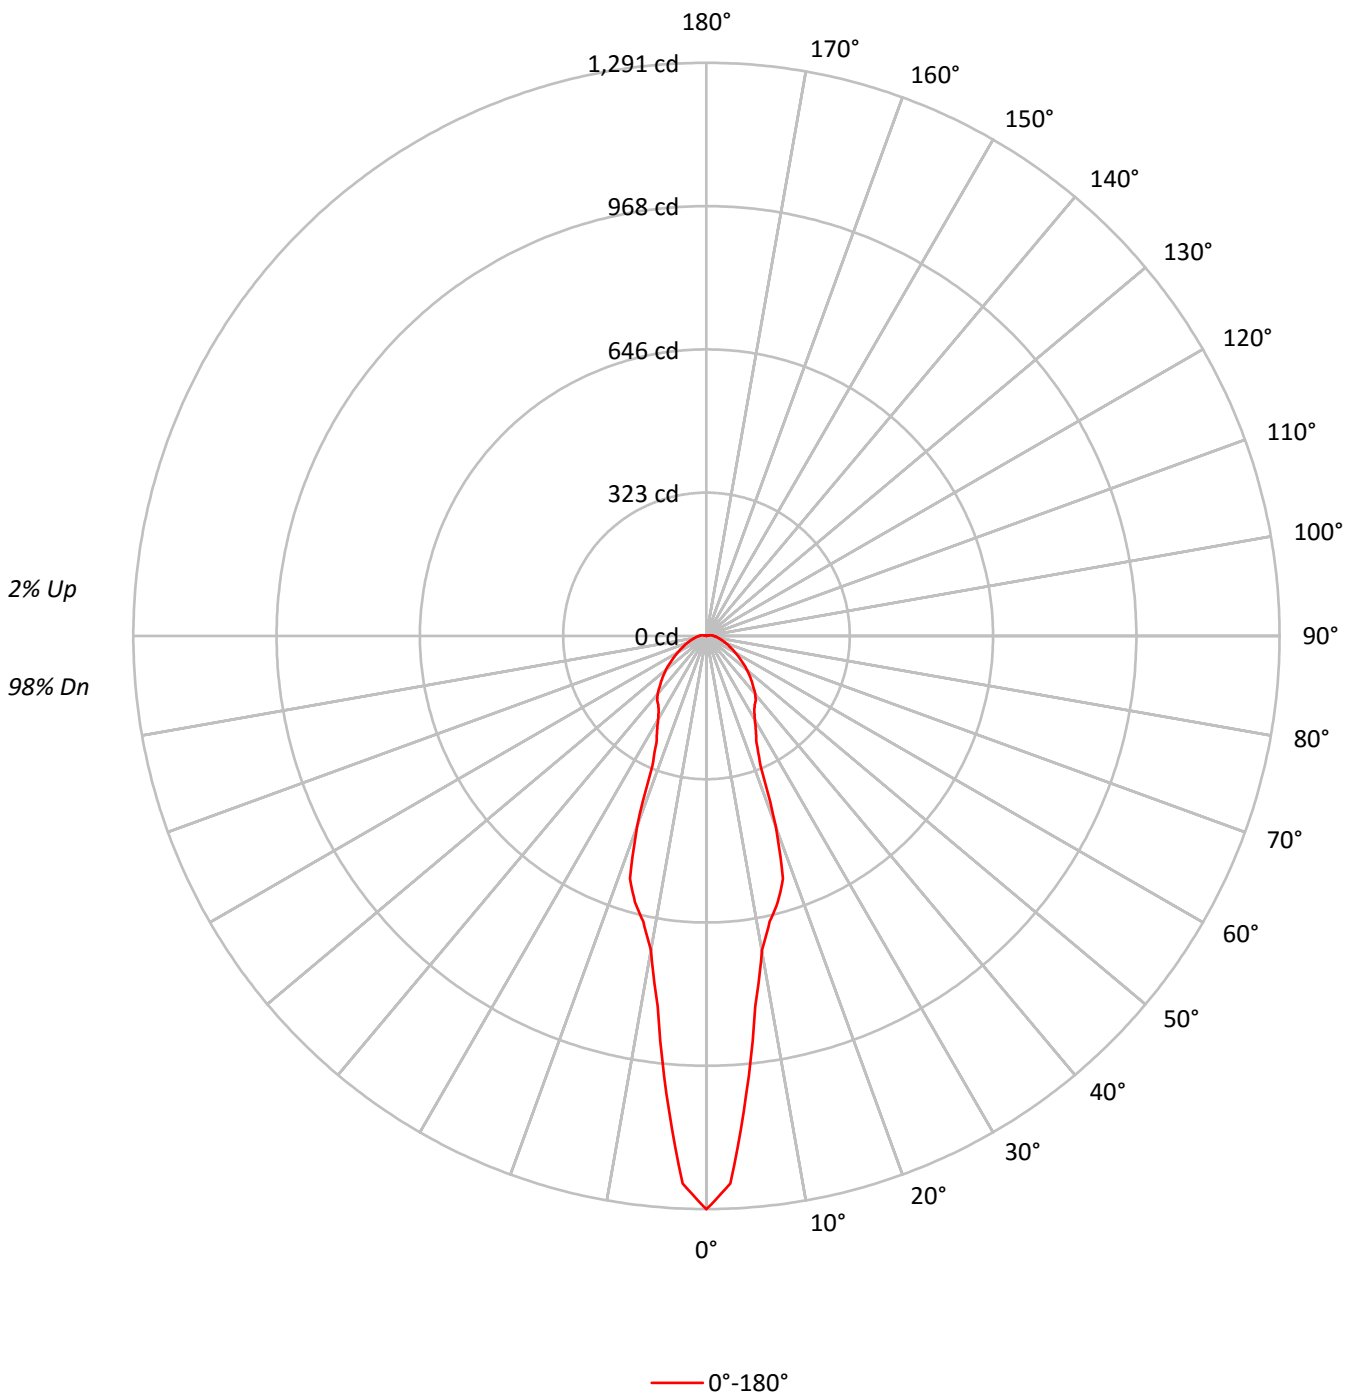



TEST NUMBER: P229216

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-CQ

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	110	105	102	98	107	103	100	97	98	96	93	94	92	90	90	89	87	85
2	102	95	89	84	99	93	87	83	89	84	81	85	82	78	82	79	76	74
3	95	86	79	73	92	84	78	72	81	75	71	78	73	70	75	71	68	66
4	88	78	71	65	86	77	70	64	74	68	63	72	67	62	69	65	61	59
5	83	72	64	59	81	71	63	58	68	62	57	66	61	57	64	60	56	54
6	78	66	59	53	76	65	58	53	63	57	52	62	56	52	60	55	51	49
7	73	62	54	49	71	61	54	49	59	53	48	58	52	48	56	51	47	46
8	69	58	50	45	68	57	50	45	55	49	45	54	48	44	53	48	44	42
9	66	54	47	42	64	53	47	42	52	46	42	51	45	41	50	45	41	40
10	62	51	44	40	61	50	44	39	49	43	39	48	43	39	47	42	39	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	84252
5°	60522
10°	38402
15°	30746
20°	21153
25°	11726
30°	9195
35°	7722
40°	6782
45°	5626
50°	4620
55°	3657
60°	2912
65°	2294
70°	1824
75°	1473
80°	1190
85°	982



TEST NUMBER: P229216

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-CQ

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	88.4	10.5
10°-20°	169.6	20.1
20°-30°	131.7	15.6
30°-40°	119.8	14.2
40°-50°	111.1	13.2
50°-60°	85.5	10.1
60°-70°	58.5	6.9
70°-80°	38.0	4.5
80°-90°	23.6	2.8
90°-100°	13.7	1.6
100°-110°	4.3	0.5
110°-120°	0.1	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	389.7	46.1
0°-40°	509.4	60.3
0°-60°	706.1	83.6
0°-90°	826.2	97.8
90°-120°	18.2	2.2
90°-150°	18.2	2.2
90°-180°	18.0	2.1
0°-180°	844.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1291	
5°	1034	88
15°	621	170
25°	266	132
35°	189	120
45°	144	111
55°	95	86
65°	58	59
75°	36	38
85°	22	19
90°	16	9
95°	13	10
105°	4	4
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229216

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-CQ

CANDELA DISTRIBUTION (FULL):

0°	
0°	1291.4
2.5°	1234.3
5°	1034.1
7.5°	840.9
10°	718.7
12.5°	658.5
15°	621.1
17.5°	572.8
20°	455.5
22.5°	318.4
25°	266.2
27.5°	240.5
30°	217.9
32.5°	200.1
35°	189.3
37.5°	182.4
40°	170.5
42.5°	156.7
45°	143.9
47.5°	131.1
50°	119.3
52.5°	106.5
55°	94.6
57.5°	84.8
60°	74.9
62.5°	66.1
65°	58.2
67.5°	52.2
70°	45.3
72.5°	40.4
75°	35.5
77.5°	31.5
80°	27.6
82.5°	24.6
85°	21.7
87.5°	18.7
90°	15.8
92.5°	14.8
95°	12.8
97.5°	10.8
100°	7.9
102.5°	5.9
105°	3.9
107.5°	2.0
110°	1.0



TEST NUMBER: P229216

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-CQ

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)