

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: SHAPER

Report Number: P229129

Luminaire Tested: **340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-FF**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P229129  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-10)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: SHAPER  
Catalog Number: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-FF  
Description: FARALLON 6" LED GLASS DOWNLIGHT. FLARED FROSTED GLASS KIT.  
Light Source: (1) 3000K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 786.8 lumens  
Efficiency: N/A  
Efficacy: 55.8 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.81  
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')  
CIE Type: Direct


Input Watts (W): 14.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P229129

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-FF

### Luminous Intensity Polar Plot

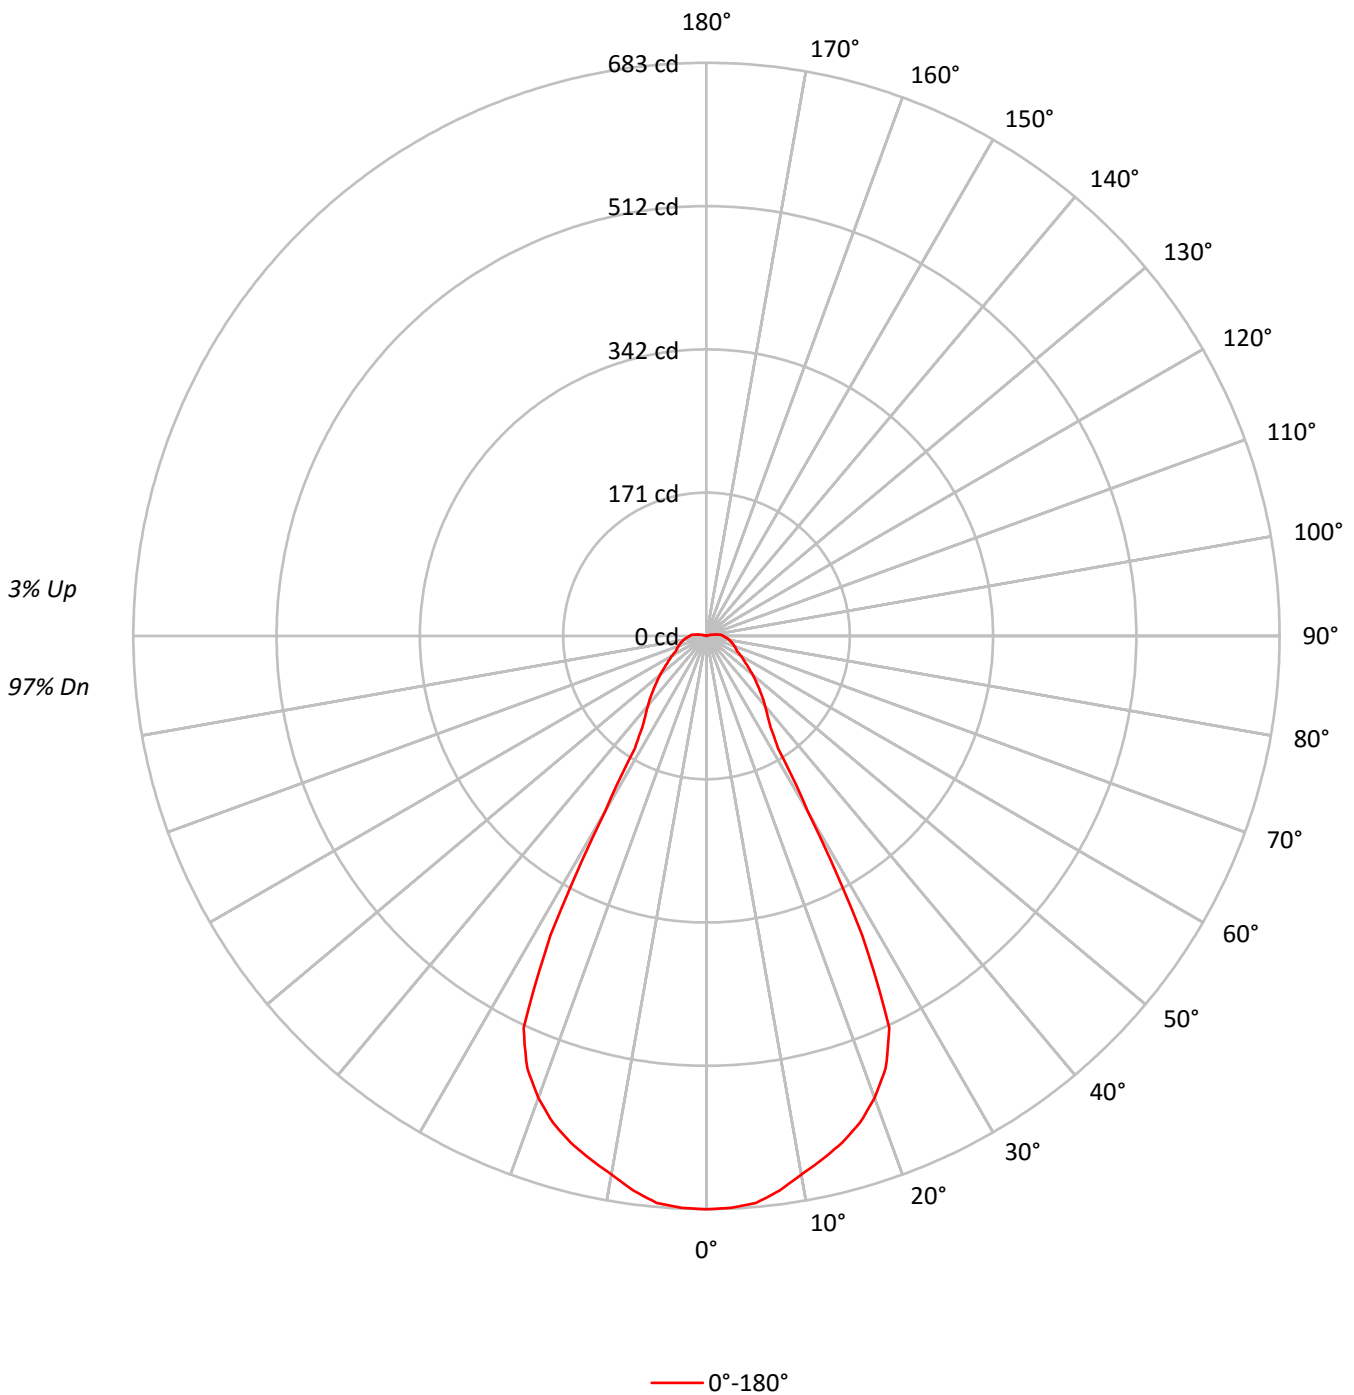



TEST NUMBER: P229129

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-FF

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	118	118	118	118	115	115	115	115	110	110	110	104	104	104	99	99	99	97
1	110	106	102	99	107	103	100	97	99	96	93	94	92	90	90	89	87	85
2	102	96	90	86	100	94	89	84	90	86	82	86	83	80	83	80	78	76
3	96	87	81	76	93	86	80	75	82	77	73	80	75	72	77	73	70	68
4	90	80	73	68	88	79	72	67	76	71	66	74	69	65	71	67	64	62
5	85	74	67	62	83	73	66	61	71	65	61	69	64	60	67	62	59	57
6	80	69	62	57	78	68	61	56	66	60	56	64	59	55	63	58	54	53
7	75	64	57	52	74	64	57	52	62	56	52	60	55	51	59	54	51	49
8	71	60	53	49	70	60	53	48	58	52	48	57	52	48	56	51	47	46
9	68	57	50	45	66	56	50	45	55	49	45	54	48	45	53	48	44	43
10	64	53	47	43	63	53	47	42	52	46	42	51	46	42	50	45	42	40

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	44572
5°	39698
10°	34817
15°	30939
20°	27195
25°	22712
30°	10191
35°	5430
40°	4312
45°	3468
50°	2788
55°	2211
60°	1839
65°	1553
70°	1430
75°	1307
80°	1190
85°	1072



TEST NUMBER: P229129

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-FF

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	63.8	8.1
10°-20°	175.6	22.3
20°-30°	214.2	27.2
30°-40°	90.7	11.5
40°-50°	68.8	8.7
50°-60°	52.1	6.6
60°-70°	39.8	5.1
70°-80°	33.3	4.2
80°-90°	25.8	3.3
90°-100°	17.2	2.2
100°-110°	5.1	0.7
110°-120°	0.4	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	453.6	57.6
0°-40°	544.2	69.2
0°-60°	665.1	84.5
0°-90°	764.1	97.1
90°-120°	22.7	2.9
90°-150°	22.7	2.9
90°-180°	23.0	2.9
0°-180°	786.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	683	
5°	678	64
15°	625	176
25°	516	214
35°	133	91
45°	89	69
55°	57	52
65°	39	40
75°	32	33
85°	24	20
90°	20	11
95°	17	12
105°	4	5
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	



TEST NUMBER: P229129

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-FF

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	683.2
2.5°	682.2
5°	678.3
7.5°	666.4
10°	651.6
12.5°	638.8
15°	625.0
17.5°	608.3
20°	585.6
22.5°	558.0
25°	515.6
27.5°	402.2
30°	241.5
32.5°	158.7
35°	133.1
37.5°	119.3
40°	108.4
42.5°	98.6
45°	88.7
47.5°	79.9
50°	72.0
52.5°	64.1
55°	57.2
57.5°	52.2
60°	47.3
62.5°	42.4
65°	39.4
67.5°	37.5
70°	35.5
72.5°	33.5
75°	31.5
77.5°	29.6
80°	27.6
82.5°	25.6
85°	23.7
87.5°	21.7
90°	19.7
92.5°	18.7
95°	16.8
97.5°	12.8
100°	9.9
102.5°	6.9
105°	3.9
107.5°	3.0
110°	1.0



TEST NUMBER: P229129

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-FF

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	1.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)