

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229274

Luminaire Tested: **340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-GFC**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229274
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-15)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-GFC
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, FROSTED INSIDE, CLEAR OUTSIDE GLASS KIT.
Light Source: (1) 3000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 866.9 lumens
Efficiency: N/A
Efficacy: 61.5 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.74
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct


Input Watts (W): 14.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229274

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-GFC

Luminous Intensity Polar Plot

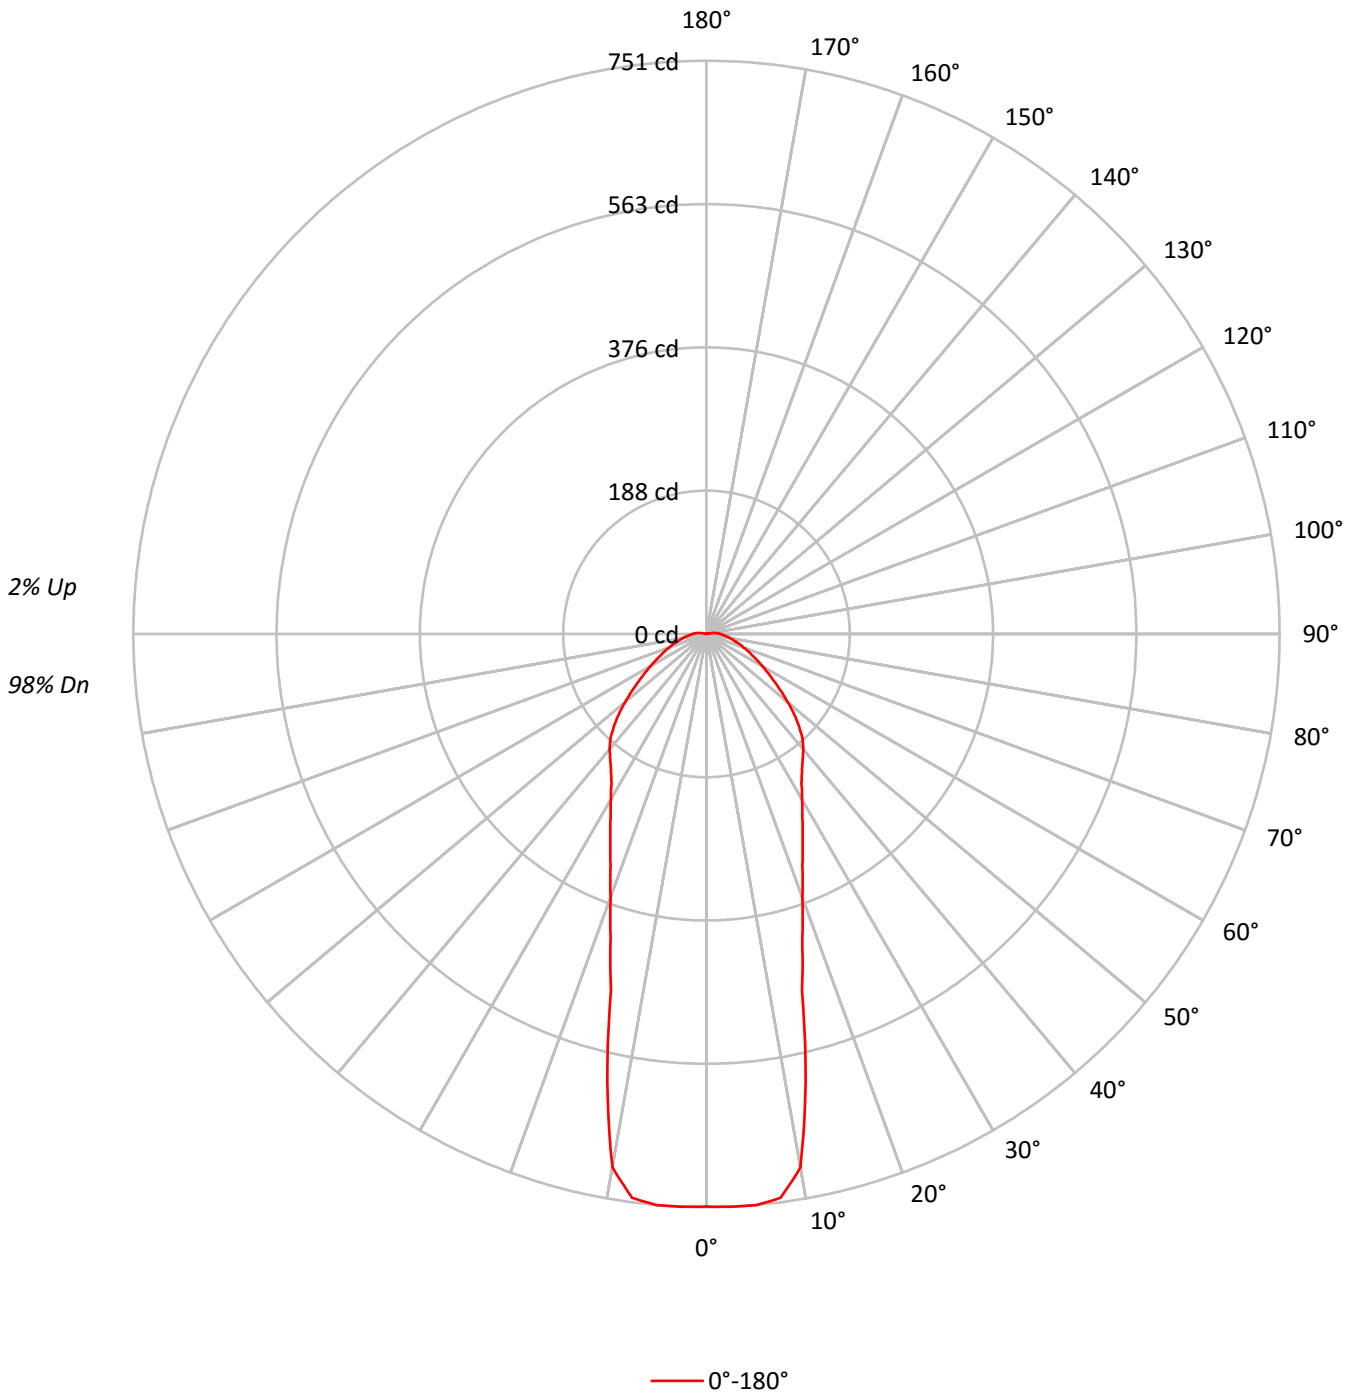



TEST NUMBER: P229274

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-GFC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	110	110	110		105	105	105		100	100	100	98
1	109	105	101	97	106	102	99	96	98	95	92		94	91	89		90	88	86	84
2	101	93	87	82	98	91	86	81	88	83	79		84	80	77		81	78	75	73
3	93	84	77	71	91	82	75	70	79	73	69		76	71	67		73	69	66	64
4	86	76	68	62	84	74	67	61	72	65	60		69	64	60		67	62	59	57
5	81	69	61	55	78	68	60	55	66	59	54		64	58	53		62	57	53	51
6	75	63	55	50	73	62	55	49	60	54	49		59	53	48		57	52	48	46
7	71	58	51	45	69	58	50	45	56	49	44		54	49	44		53	48	44	42
8	66	54	47	41	65	54	46	41	52	46	41		51	45	41		50	44	40	38
9	63	51	43	38	61	50	43	38	49	42	38		48	42	37		47	41	37	36
10	59	47	40	35	58	47	40	35	46	39	35		45	39	35		44	38	35	33

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	48944
5°	43965
10°	37927
15°	23915
20°	17076
25°	13113
30°	10566
35°	8889
40°	7844
45°	6705
50°	5383
55°	4190
60°	3297
65°	2605
70°	2102
75°	1676
80°	1358
85°	1072



TEST NUMBER: P229274

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-GFC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.6	8.1
10°-20°	139.4	16.1
20°-30°	138.1	15.9
30°-40°	137.6	15.9
40°-50°	131.4	15.2
50°-60°	98.0	11.3
60°-70°	66.5	7.7
70°-80°	43.3	5.0
80°-90°	26.3	3.0
90°-100°	13.7	1.6
100°-110°	1.9	0.2
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	348.2	40.2
0°-40°	485.8	56.0
0°-60°	715.2	82.5
0°-90°	851.3	98.2
90°-120°	15.6	1.8
90°-150°	15.6	1.8
90°-180°	16.0	1.8
0°-180°	866.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	750	
5°	751	71
15°	483	139
25°	298	138
35°	218	138
45°	172	131
55°	108	98
65°	66	66
75°	40	43
85°	24	21
90°	18	10
95°	13	9
105°	1	2
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229274

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-GFC

CANDELA DISTRIBUTION (FULL):

0°	
0°	750.2
2.5°	751.2
5°	751.2
7.5°	745.3
10°	709.8
12.5°	600.4
15°	483.1
17.5°	417.0
20°	367.7
22.5°	328.3
25°	297.7
27.5°	272.1
30°	250.4
32.5°	231.7
35°	217.9
37.5°	207.0
40°	197.2
42.5°	186.3
45°	171.5
47.5°	155.8
50°	139.0
52.5°	123.2
55°	108.4
57.5°	95.6
60°	84.8
62.5°	74.9
65°	66.1
67.5°	59.1
70°	52.2
72.5°	46.3
75°	40.4
77.5°	35.5
80°	31.5
82.5°	27.6
85°	23.7
87.5°	20.7
90°	17.7
92.5°	15.8
95°	12.8
97.5°	9.9
100°	5.9
102.5°	3.0
105°	1.0
107.5°	0.0
110°	0.0



TEST NUMBER: P229274

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9030-6LBW1LI-GFC

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)