

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: G1-1705-068-16

Luminaire Tested: **340-6B-15-D010 / 340-EU6B-1020-9035-6LBW1LI-GCC**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: G1-1705-068-16
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-15-D010 / 340-EU6B-1020-9035-6LBW1LI-GCC
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE,
CLEAR OUTSIDE GLASS KIT.
Light Source: (1) 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 993.1 lumens
Efficiency: N/A
Efficacy: 70.4 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.89
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 14.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: G1-1705-068-16

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9035-6LBW1LI-GCC

Luminous Intensity Polar Plot

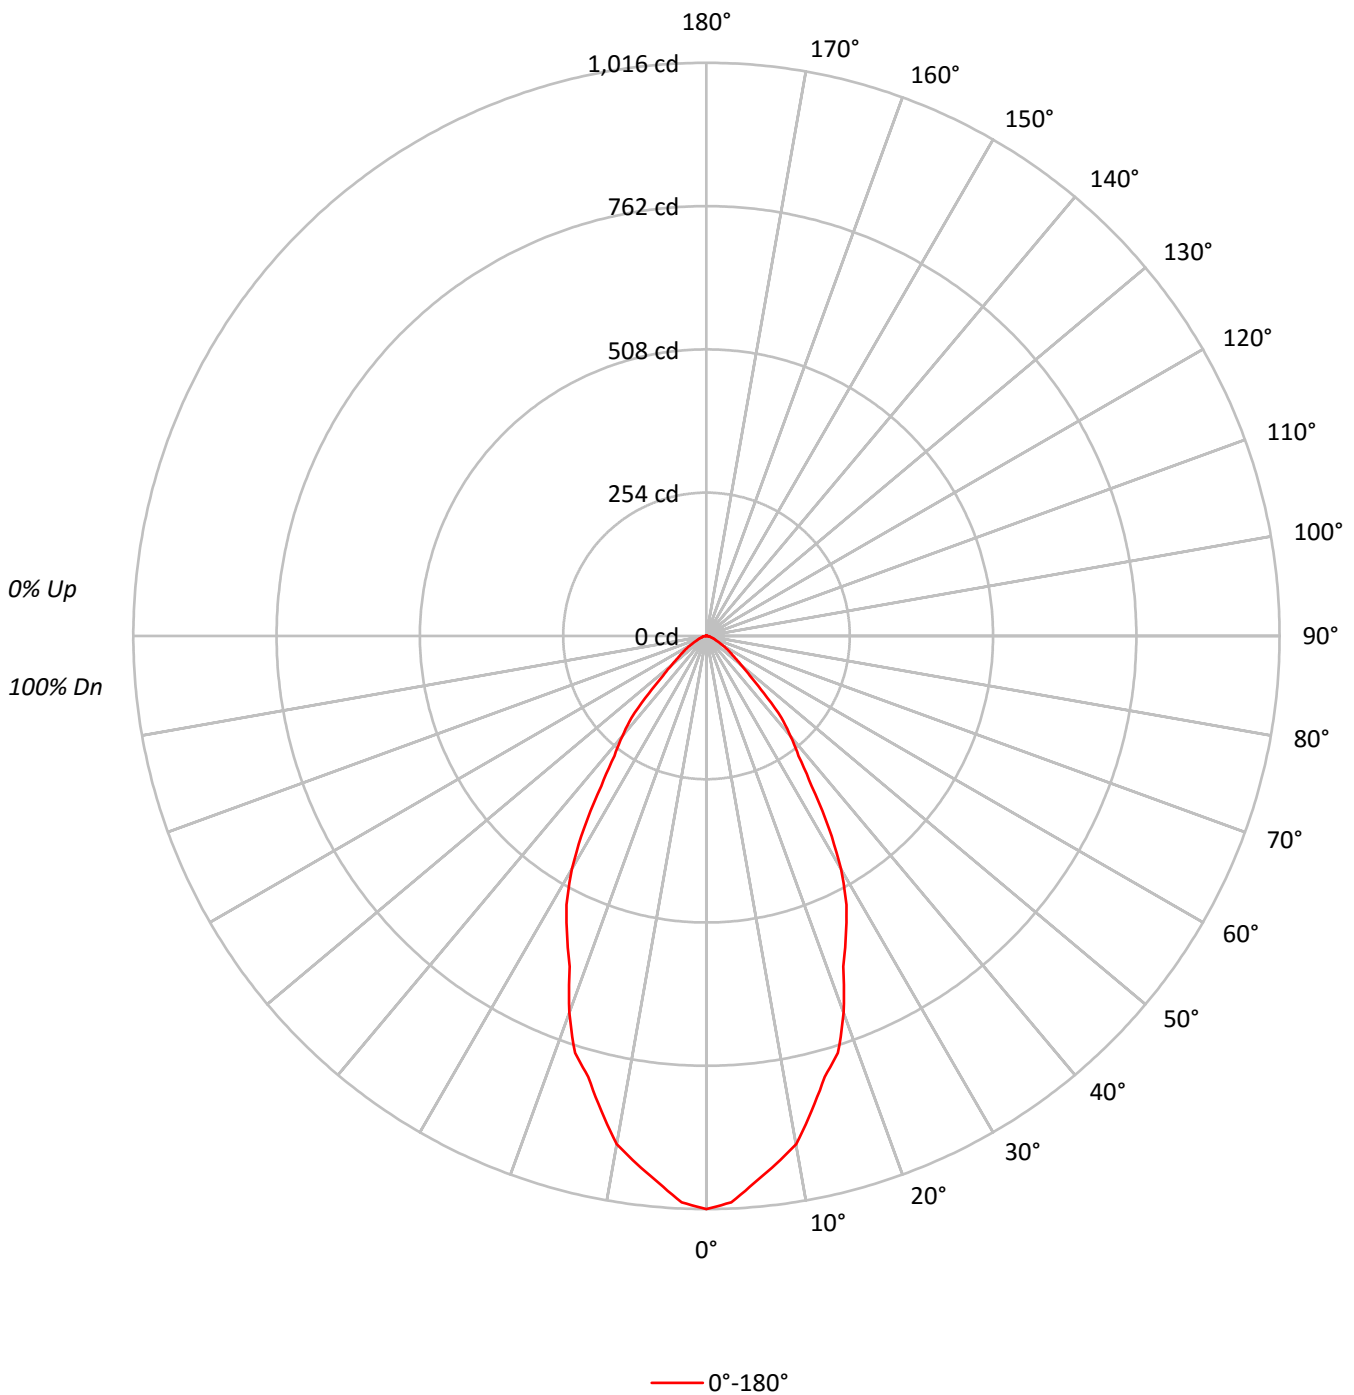



TEST NUMBER: G1-1705-068-16

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9035-6LBW1LI-GCC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83
3	100	93	87	83	98	91	86	82	88	84	81	86	82	79	84	81	78	76
4	94	86	79	75	92	84	79	74	82	77	73	80	76	72	78	74	71	70
5	89	79	73	68	87	78	72	68	76	71	67	75	70	66	73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59
7	79	69	62	58	78	68	62	57	67	61	57	66	60	57	64	60	56	55
8	75	64	58	53	74	64	58	53	63	57	53	62	56	53	61	56	52	51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48
10	67	57	51	46	66	56	50	46	56	50	46	55	50	46	54	49	46	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	66284
5°	63722
10°	60616
15°	54642
20°	49363
25°	42111
30°	35934
35°	25884
40°	19758
45°	13286
50°	8221
55°	5915
60°	4306
65°	2933
70°	2480
75°	2017
80°	1879
85°	1497



TEST NUMBER: G1-1705-068-16

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9035-6LBW1LI-GCC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.1	9.2
10°-20°	228.2	23.0
20°-30°	269.0	27.1
30°-40°	209.1	21.1
40°-50°	114.7	11.6
50°-60°	47.8	4.8
60°-70°	20.2	2.0
70°-80°	8.7	0.9
80°-90°	2.4	0.2
90°-100°	1.1	0.1
100°-110°	0.7	0.1
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	588.3	59.2
0°-40°	797.4	80.3
0°-60°	960.0	96.7
0°-90°	991.3	99.8
90°-120°	1.8	0.2
90°-150°	1.8	0.2
90°-180°	2.0	0.2
0°-180°	993.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1016	
5°	973	91
15°	809	228
25°	585	269
35°	325	209
45°	144	115
55°	52	48
65°	19	20
75°	8	9
85°	2	2
90°	1	1
95°	1	1
105°	1	1
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: G1-1705-068-16

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9035-6LBW1LI-GCC

CANDELA DISTRIBUTION (FULL):

0°	
0°	1016
2.5°	1005
5°	973
7.5°	944
10°	915
12.5°	862
15°	809
17.5°	775
20°	711
22.5°	634
25°	585
27.5°	537
30°	477
32.5°	404
35°	325
37.5°	268
40°	232
42.5°	197
45°	144
47.5°	104
50°	81
52.5°	64
55°	52
57.5°	42
60°	33
62.5°	24
65°	19
67.5°	16
70°	13
72.5°	10
75°	8
77.5°	6
80°	5
82.5°	3
85°	2
87.5°	1
90°	1
92.5°	1
95°	1
97.5°	1
100°	1
102.5°	1
105°	1
107.5°	0
110°	0



TEST NUMBER: G1-1705-068-16

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9035-6LBW1LI-GCC

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0
115°	0
117.5°	0
120°	0
122.5°	0
125°	0
127.5°	0
130°	0
132.5°	0
135°	0
137.5°	0
140°	0
142.5°	0
145°	0
147.5°	0
150°	0
152.5°	0
155°	0
157.5°	0
160°	0
162.5°	0
165°	0
167.5°	0
170°	0
172.5°	0
175°	0
177.5°	0
180°	0

(END OF REPORT)