

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229275

Luminaire Tested: **340-6B-15-D010 / 340-EU6B-1020-9040-6LBW1LI-GFC**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229275
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-15)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-15-D010 / 340-EU6B-1020-9040-6LBW1LI-GFC
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, FROSTED INSIDE, CLEAR OUTSIDE GLASS KIT.
Light Source: (1) 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 880.6 lumens
Efficiency: N/A
Efficacy: 62.5 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.74
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct


Input Watts (W): 14.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229275

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9040-6LBW1LI-GFC

Luminous Intensity Polar Plot

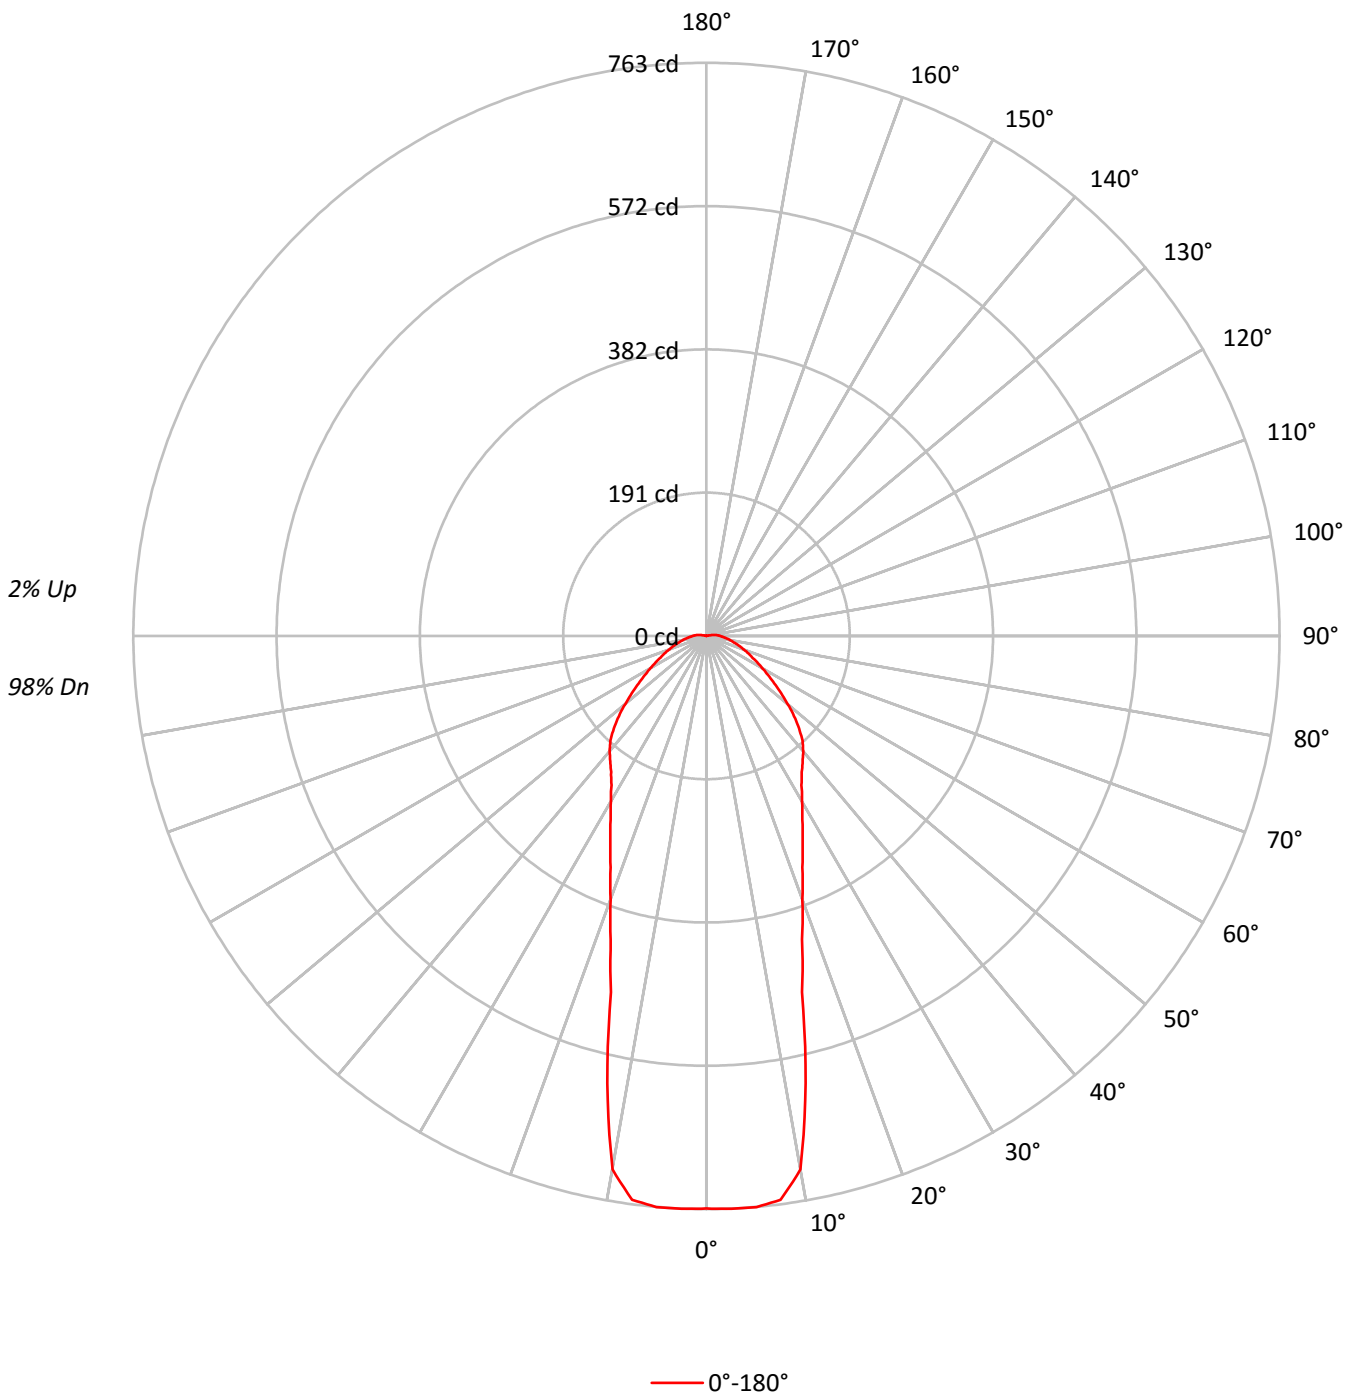



TEST NUMBER: P229275

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9040-6LBW1LI-GFC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	109	105	101	97	106	102	99	96	98	95	92	94	91	89	90	88	86	84
2	101	93	87	82	98	91	86	81	88	83	79	84	80	77	81	78	75	73
3	93	84	77	71	91	82	75	70	79	73	69	76	71	67	73	69	66	64
4	86	76	68	62	84	74	67	61	72	65	60	69	64	60	67	62	59	57
5	81	69	61	55	78	68	60	55	66	59	54	64	58	53	62	57	53	51
6	75	63	55	50	73	62	55	49	60	54	49	59	53	48	57	52	48	46
7	71	58	51	45	69	58	50	45	56	49	44	54	49	44	53	48	44	42
8	66	54	47	41	65	54	46	41	52	46	41	51	45	41	50	44	40	38
9	63	51	43	38	61	50	43	38	49	42	38	48	42	37	47	41	37	36
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35	44	38	35	33

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	49726
5°	44667
10°	38531
15°	24291
20°	17350
25°	13325
30°	10735
35°	9028
40°	7967
45°	6814
50°	5468
55°	4260
60°	3348
65°	2645
70°	2138
75°	1705
80°	1380
85°	1086



TEST NUMBER: P229275

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9040-6LBW1LI-GFC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	71.8	8.1
10°-20°	141.6	16.1
20°-30°	140.3	15.9
30°-40°	139.8	15.9
40°-50°	133.4	15.2
50°-60°	99.6	11.3
60°-70°	67.5	7.7
70°-80°	44.0	5.0
80°-90°	26.7	3.0
90°-100°	13.9	1.6
100°-110°	1.9	0.2
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	353.7	40.2
0°-40°	493.5	56.0
0°-60°	726.6	82.5
0°-90°	864.8	98.2
90°-120°	15.8	1.8
90°-150°	15.8	1.8
90°-180°	16.0	1.8
0°-180°	880.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	762	
5°	763	72
15°	491	142
25°	302	140
35°	221	140
45°	174	133
55°	110	100
65°	67	68
75°	41	44
85°	24	21
90°	18	10
95°	13	9
105°	1	2
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229275

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9040-6LBW1LI-GFC

CANDELA DISTRIBUTION (FULL):

0°	
0°	762.2
2.5°	763.2
5°	763.2
7.5°	757.1
10°	721.1
12.5°	609.9
15°	490.7
17.5°	423.6
20°	373.6
22.5°	333.5
25°	302.5
27.5°	276.4
30°	254.4
32.5°	235.4
35°	221.3
37.5°	210.3
40°	200.3
42.5°	189.3
45°	174.3
47.5°	158.2
50°	141.2
52.5°	125.2
55°	110.2
57.5°	97.1
60°	86.1
62.5°	76.1
65°	67.1
67.5°	60.1
70°	53.1
72.5°	47.1
75°	41.1
77.5°	36.1
80°	32.0
82.5°	28.0
85°	24.0
87.5°	21.0
90°	18.0
92.5°	16.0
95°	13.0
97.5°	10.0
100°	6.0
102.5°	3.0
105°	1.0
107.5°	0.0
110°	0.0



TEST NUMBER: P229275

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9040-6LBW1LI-GFC

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)