

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: SHAPER

Report Number: P229160

Luminaire Tested: **340-6B-15-D010 / 340-EU6B-1020-9050-6LBW1LI-CC**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P229160  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-11)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: SHAPER  
Catalog Number: 340-6B-15-D010 / 340-EU6B-1020-9050-6LBW1LI-CC  
Description: FARALLON 6" LED GLASS DOWNLIGHT. CYLINDRICAL CLEAR GLASS KIT.  
Light Source: (1) 5000K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 922.6 lumens  
Efficiency: N/A  
Efficacy: 65.4 lumens/watt  
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.71  
Luminous Opening: Circular (Dia: 0.46' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P229160

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9050-6LBW1LI-CC

### Luminous Intensity Polar Plot

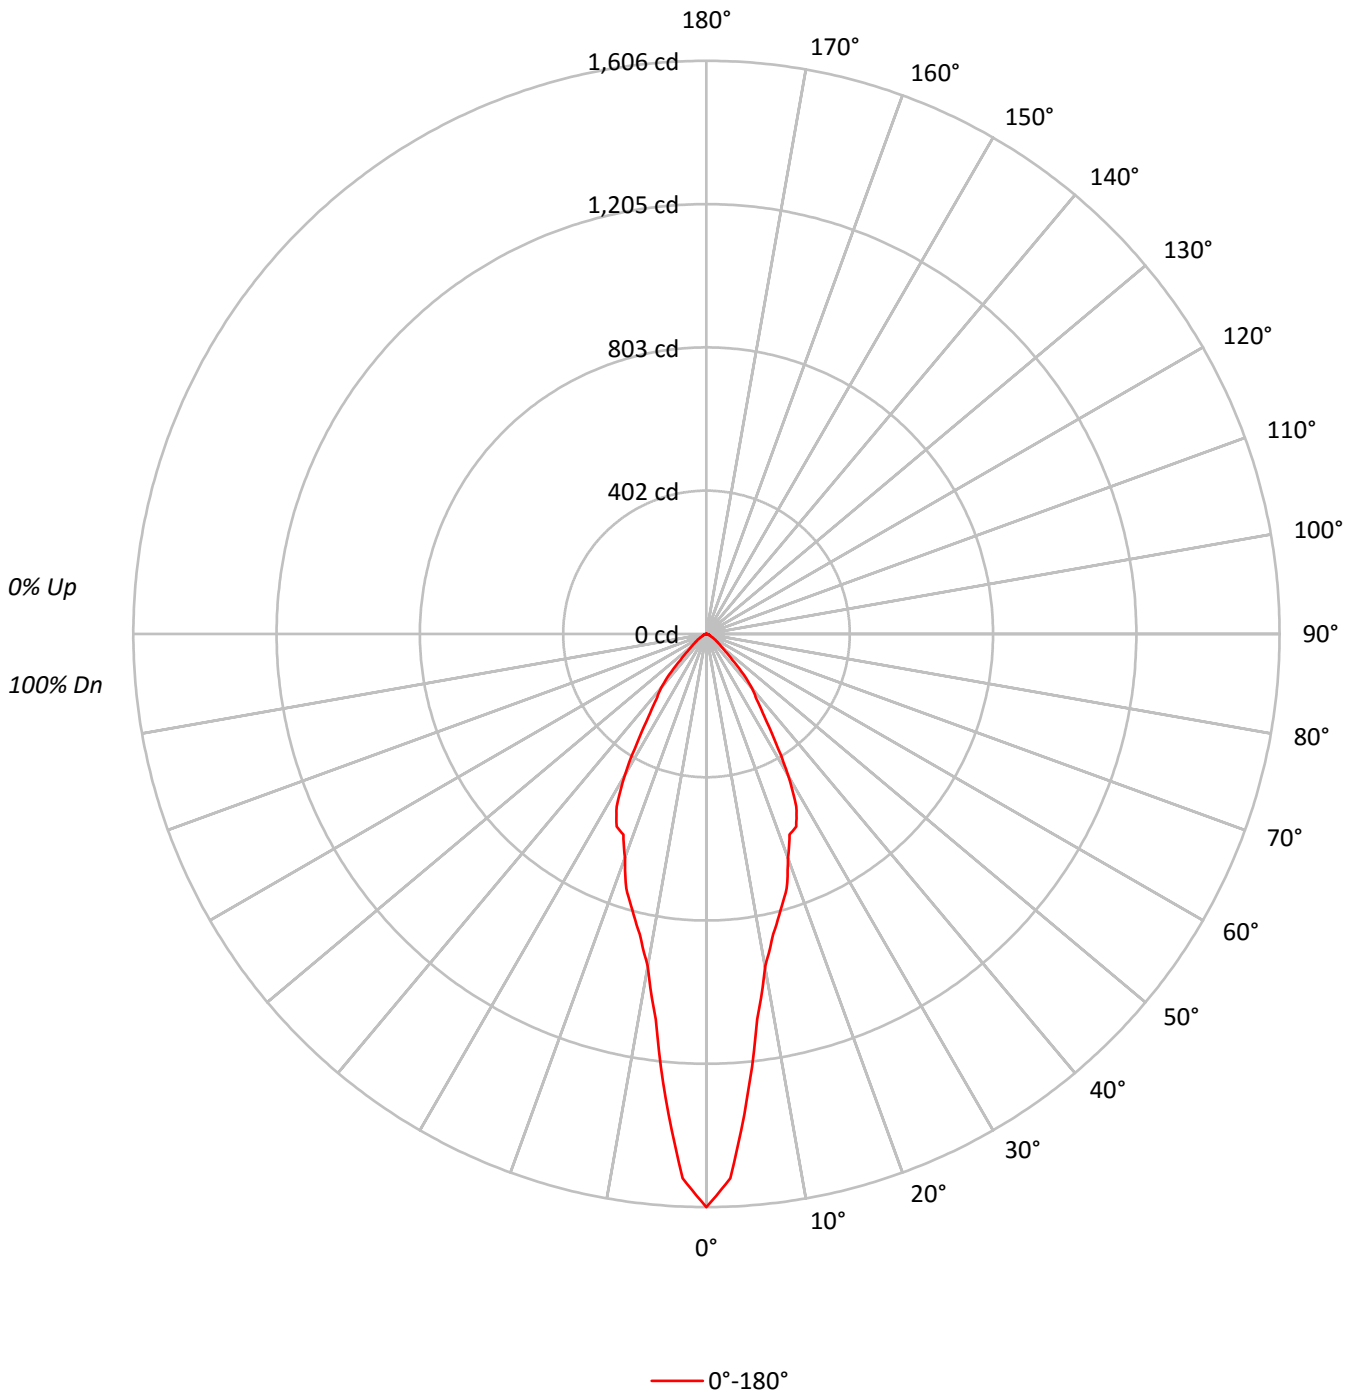



TEST NUMBER: P229160

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9050-6LBW1LI-CC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	94	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85
3	101	95	89	85	99	93	88	84	90	86	83	88	85	82	86	83	80	79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	74	73
5	91	82	76	71	89	81	75	71	79	74	70	78	73	70	76	72	69	68
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	64	63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	61	68	63	60	59
8	78	68	62	57	76	67	61	57	66	61	57	65	60	57	64	60	56	55
9	74	64	58	54	73	63	58	54	62	57	53	62	57	53	61	56	53	52
10	70	60	54	50	69	60	54	50	59	54	50	58	53	50	58	53	50	49

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	104789
5°	85562
10°	62696
15°	54142
20°	46364
25°	42860
30°	34548
35°	22428
40°	16956
45°	9466
50°	5511
55°	3663
60°	2492
65°	1559
70°	1335
75°	1008
80°	751
85°	749



TEST NUMBER: P229160

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9050-6LBW1LI-CC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	113.0	12.2
10°-20°	224.3	24.3
20°-30°	265.2	28.7
30°-40°	185.6	20.1
40°-50°	86.6	9.4
50°-60°	30.0	3.3
60°-70°	11.4	1.2
70°-80°	4.6	0.5
80°-90°	1.1	0.1
90°-100°	0.7	0.1
100°-110°	0.4	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	602.5	65.3
0°-40°	788.0	85.4
0°-60°	904.6	98.1
0°-90°	921.7	99.9
90°-120°	1.1	0.1
90°-150°	1.1	0.1
90°-180°	1.0	0.1
0°-180°	922.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1606	
5°	1306	113
15°	802	224
25°	595	265
35°	282	186
45°	103	87
55°	32	30
65°	10	11
75°	4	5
85°	1	1
90°	0	0
95°	0	0
105°	0	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229160

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9050-6LBW1LI-CC

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1606.2
2.5°	1526.8
5°	1306.5
7.5°	1089.3
10°	946.4
12.5°	862.0
15°	801.6
17.5°	747.3
20°	667.8
22.5°	608.5
25°	595.4
27.5°	545.1
30°	458.6
32.5°	361.1
35°	281.6
37.5°	230.3
40°	199.1
42.5°	154.9
45°	102.6
47.5°	71.4
50°	54.3
52.5°	41.2
55°	32.2
57.5°	25.1
60°	19.1
62.5°	14.1
65°	10.1
67.5°	9.1
70°	7.0
72.5°	6.0
75°	4.0
77.5°	3.0
80°	2.0
82.5°	1.0
85°	1.0
87.5°	1.0
90°	0.0
92.5°	0.0
95°	0.0
97.5°	1.0
100°	1.0
102.5°	1.0
105°	0.0
107.5°	0.0
110°	0.0



TEST NUMBER: P229160

CATALOG NUMBER: 340-6B-15-D010 / 340-EU6B-1020-9050-6LBW1LI-CC

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)