

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229191

Luminaire Tested: **340-6B-20-D010 / 340-EU6B-1020-9027-6LBW1LI-CF**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229191
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-12)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-20-D010 / 340-EU6B-1020-9027-6LBW1LI-CF
Description: FARALLON 6" LED GLASS DOWNLIGHT. CYLINDRICAL FROSTED GLASS KIT.
Light Source: (1) 2700K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1142.5 lumens
Efficiency: N/A
Efficacy: 54.9 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.55
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229191

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9027-6LBW1LI-CF

Luminous Intensity Polar Plot

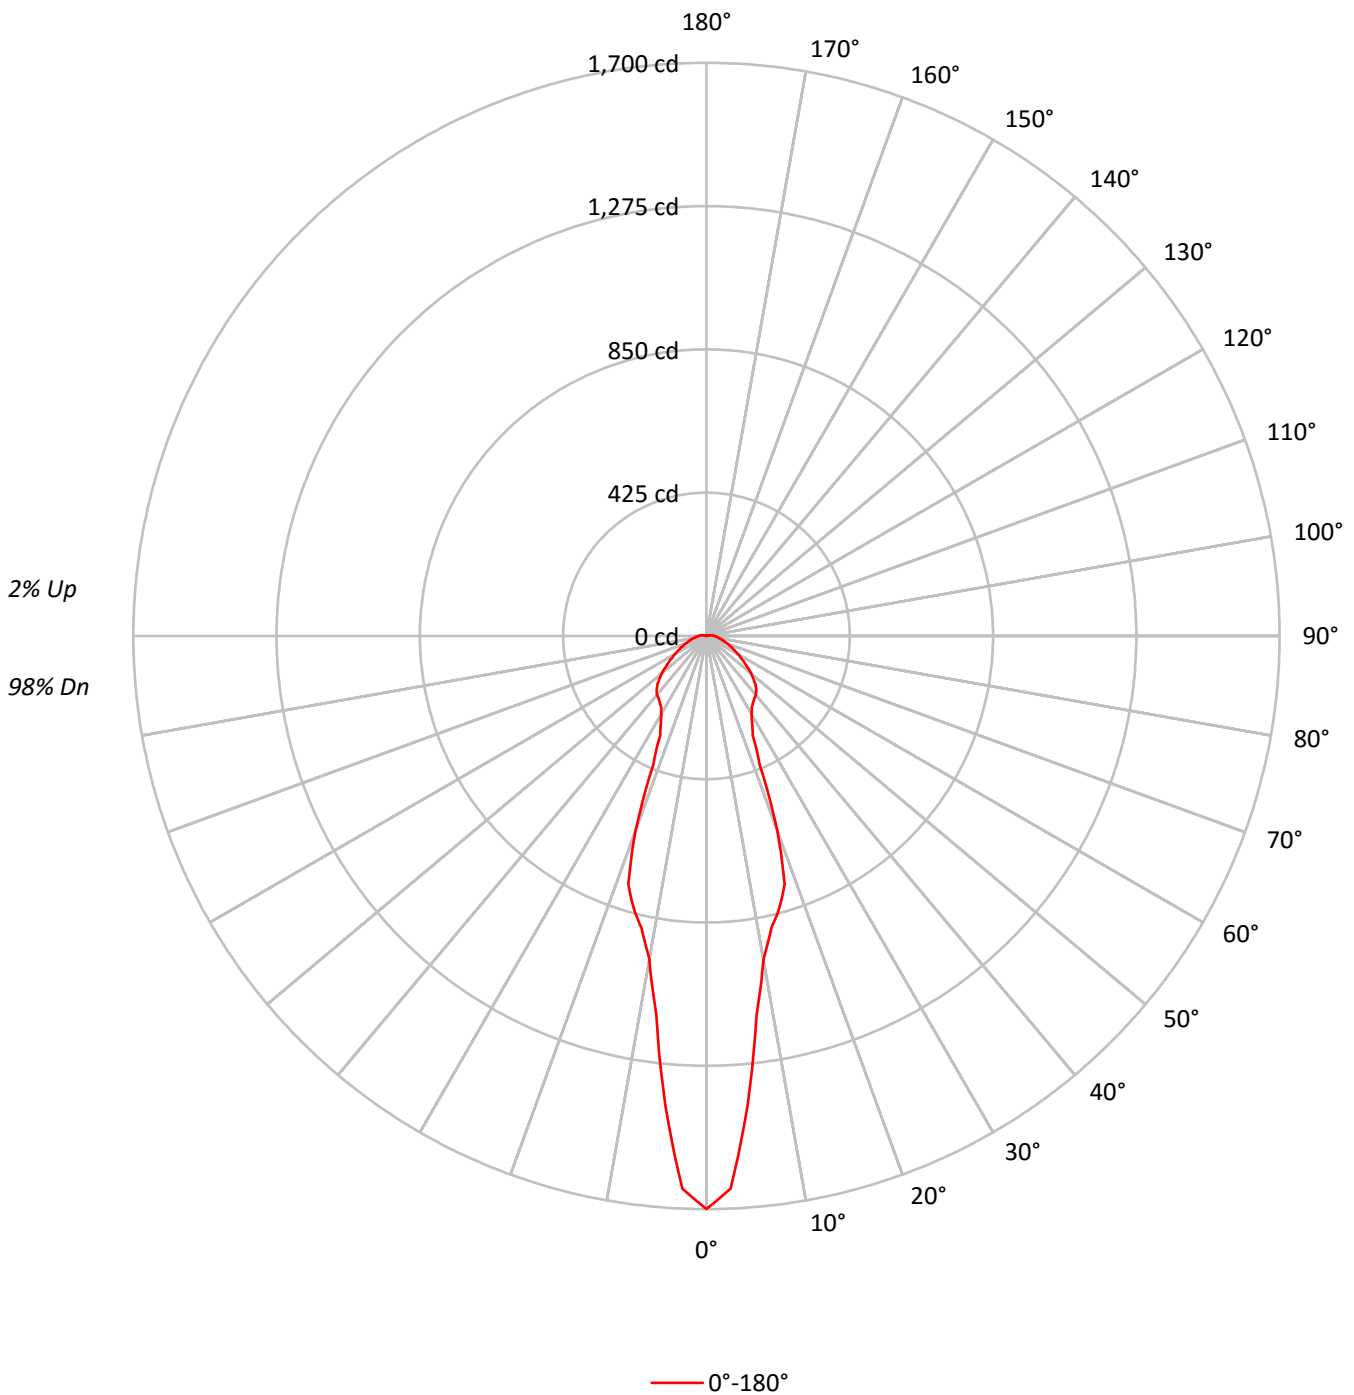



TEST NUMBER: P229191

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9027-6LBW1LI-CF

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	109	105	101	98	107	103	99	96	98	95	93	94	92	90	90	88	87	84
2	101	94	88	83	99	92	87	82	88	84	80	85	81	78	82	79	76	74
3	94	85	78	72	92	83	77	72	80	75	70	77	73	69	75	71	67	65
4	88	77	70	64	85	76	69	64	73	67	63	71	66	62	69	64	61	59
5	82	71	63	58	80	70	63	57	68	61	56	66	60	56	64	59	55	53
6	77	66	58	52	75	65	57	52	63	56	52	61	55	51	59	54	50	49
7	73	61	53	48	71	60	53	48	58	52	47	57	51	47	55	50	47	45
8	69	57	50	44	67	56	49	44	55	48	44	53	48	44	52	47	43	42
9	65	53	46	41	64	53	46	41	52	45	41	50	45	41	49	44	40	39
10	62	50	43	39	61	50	43	39	49	43	38	48	42	38	47	42	38	36

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	110903
5°	81831
10°	52033
15°	41359
20°	28518
25°	14338
30°	11288
35°	9840
40°	9069
45°	8038
50°	6684
55°	5296
60°	4203
65°	3323
70°	2601
75°	2079
80°	1703
85°	1371



TEST NUMBER: P229191

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9027-6LBW1LI-CF

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	119.0	10.4
10°-20°	228.6	20.0
20°-30°	166.0	14.5
30°-40°	152.3	13.3
40°-50°	157.1	13.7
50°-60°	123.4	10.8
60°-70°	83.9	7.3
70°-80°	53.8	4.7
80°-90°	33.2	2.9
90°-100°	19.2	1.7
100°-110°	5.8	0.5
110°-120°	0.2	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	513.6	45.0
0°-40°	665.9	58.3
0°-60°	946.4	82.8
0°-90°	1117.3	97.8
90°-120°	25.2	2.2
90°-150°	25.2	2.2
90°-180°	25.0	2.2
0°-180°	1142.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1700	
5°	1398	119
15°	836	229
25°	326	166
35°	241	152
45°	206	157
55°	137	123
65°	84	84
75°	50	54
85°	30	27
90°	22	13
95°	18	13
105°	5	6
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229191

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9027-6LBW1LI-CF

CANDELA DISTRIBUTION (FULL):

0°	
0°	1699.9
2.5°	1640.6
5°	1398.2
7.5°	1135.9
10°	973.8
12.5°	888.2
15°	835.5
17.5°	770.9
20°	614.1
22.5°	411.1
25°	325.5
27.5°	292.5
30°	267.5
32.5°	250.4
35°	241.2
37.5°	233.2
40°	228.0
42.5°	218.7
45°	205.6
47.5°	189.8
50°	172.6
52.5°	154.2
55°	137.0
57.5°	121.2
60°	108.1
62.5°	94.9
65°	84.3
67.5°	73.8
70°	64.6
72.5°	56.7
75°	50.1
77.5°	44.8
80°	39.5
82.5°	34.3
85°	30.3
87.5°	26.4
90°	22.4
92.5°	21.1
95°	18.4
97.5°	14.5
100°	10.5
102.5°	7.9
105°	5.3
107.5°	2.6
110°	1.3



TEST NUMBER: P229191

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9027-6LBW1LI-CF

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)