

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229249

Luminaire Tested: **340-6B-20-D010 / 340-EU6B-1020-9027-6LBW1LI-GFF**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229249
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-14)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-20-D010 / 340-EU6B-1020-9027-6LBW1LI-GFF
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, FROSTED INSIDE, FROSTED OUTSIDE GLASS KIT.
Light Source: (1) 2700K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1080.0 lumens
Efficiency: N/A
Efficacy: 51.9 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.63
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229249

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9027-6LBW1LI-GFF

Luminous Intensity Polar Plot

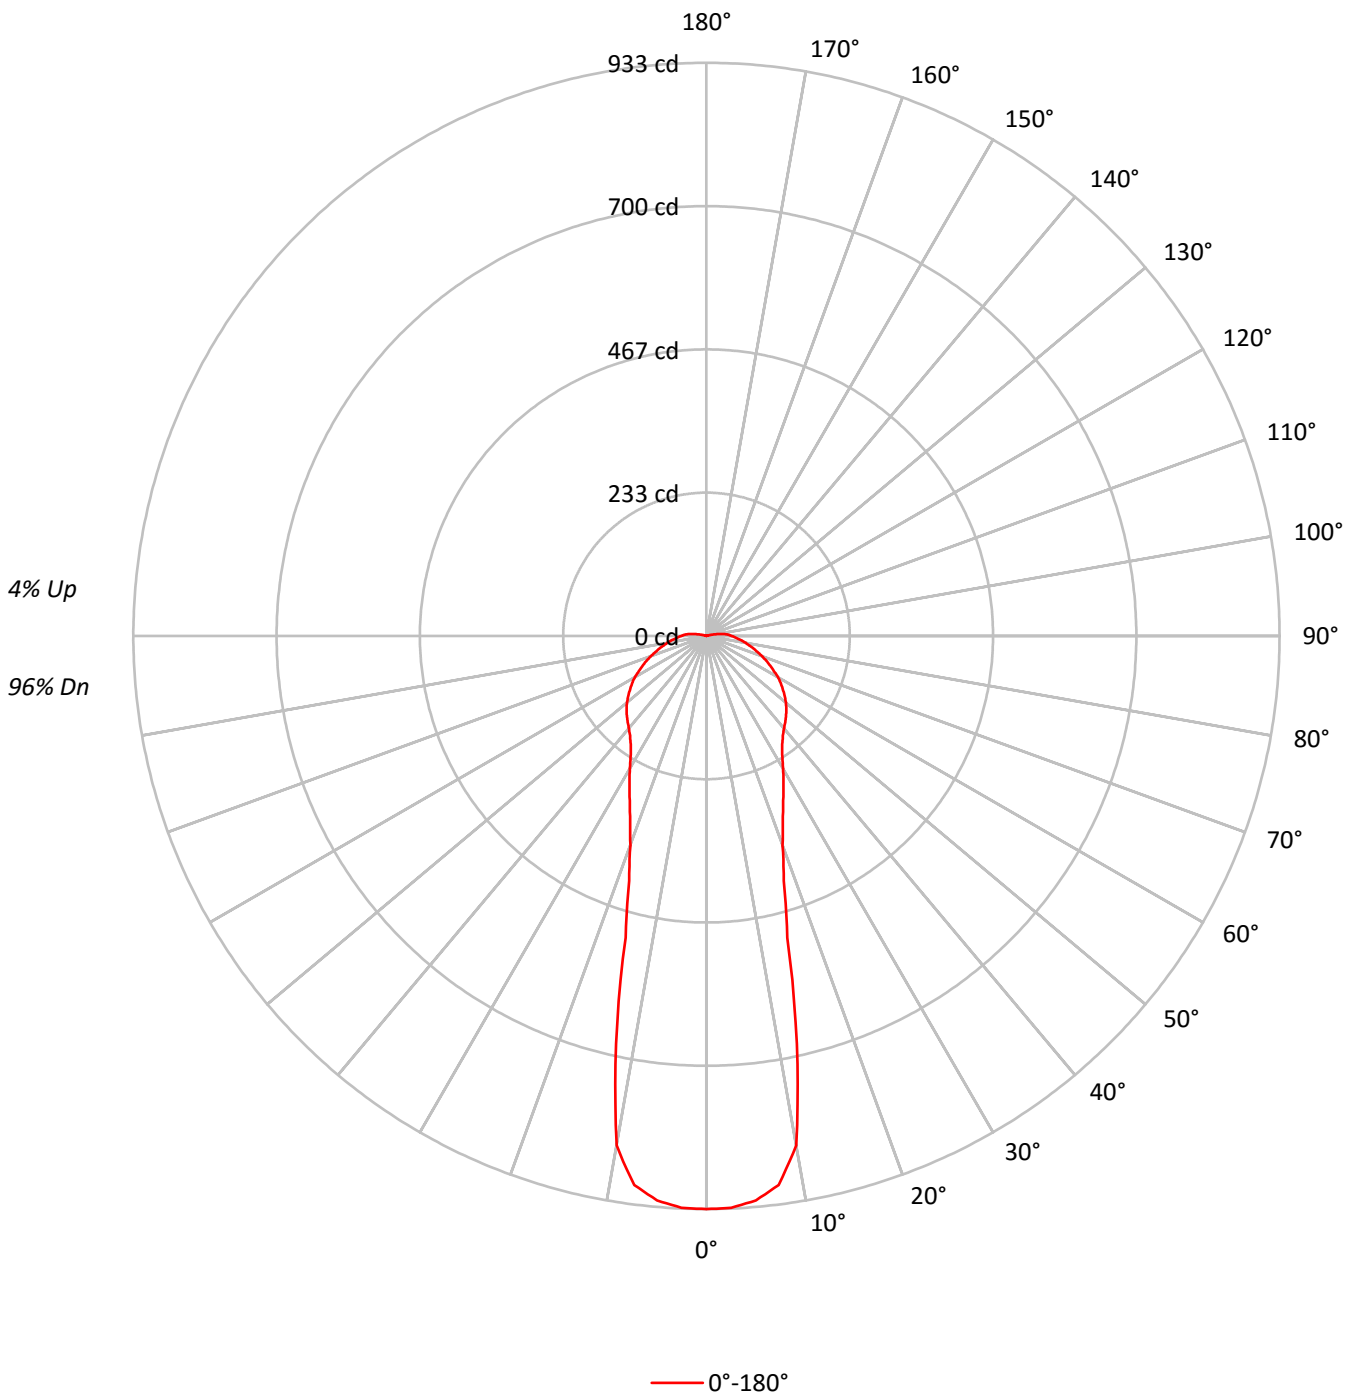



TEST NUMBER: P229249

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9027-6LBW1LI-GFF

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	118	118	118	118	115	115	115	115	109	109	109		104	104	104		99	99	99	96
1	107	102	97	93	104	99	95	91	94	91	88		90	87	84		85	83	81	79
2	98	89	82	77	95	87	81	75	83	78	73		79	75	71		76	72	69	66
3	90	79	71	65	87	77	70	64	74	68	62		71	65	61		68	63	59	57
4	83	71	63	56	80	70	62	56	67	60	54		64	58	53		61	56	52	50
5	77	65	56	49	75	63	55	49	61	54	48		58	52	47		56	51	47	44
6	72	59	50	44	70	58	50	44	56	49	43		54	47	43		52	46	42	40
7	67	54	46	40	65	53	45	40	51	44	39		50	43	39		48	43	38	36
8	63	50	42	37	61	49	42	36	48	41	36		46	40	36		45	39	35	33
9	60	47	39	34	58	46	39	34	45	38	33		43	37	33		42	37	33	31
10	56	44	36	31	55	43	36	31	42	35	31		41	35	31		40	34	30	29

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	60870
5°	53984
10°	44996
15°	25182
20°	16830
25°	13003
30°	10512
35°	8763
40°	7808
45°	7162
50°	6533
55°	5857
60°	5226
65°	4517
70°	3874
75°	3282
80°	2785
85°	2325



TEST NUMBER: P229249

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9027-6LBW1LI-GFF

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	85.8	7.9
10°-20°	149.3	13.8
20°-30°	137.0	12.7
30°-40°	136.2	12.6
40°-50°	141.5	13.1
50°-60°	136.0	12.6
60°-70°	113.7	10.5
70°-80°	83.9	7.8
80°-90°	56.8	5.3
90°-100°	32.9	3.0
100°-110°	6.8	0.6
110°-120°	0.2	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	372.1	34.5
0°-40°	508.2	47.1
0°-60°	785.7	72.7
0°-90°	1040.0	96.3
90°-120°	39.9	3.7
90°-150°	39.9	3.7
90°-180°	40.0	3.7
0°-180°	1080.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	933	
5°	922	86
15°	509	149
25°	295	137
35°	215	136
45°	183	141
55°	152	136
65°	115	114
75°	79	84
85°	51	45
90°	41	23
95°	32	22
105°	5	7
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229249

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9027-6LBW1LI-GFF

CANDELA DISTRIBUTION (FULL):

0°	
0°	933.0
2.5°	931.7
5°	922.4
7.5°	901.4
10°	842.1
12.5°	680.0
15°	508.7
17.5°	417.7
20°	362.4
22.5°	324.2
25°	295.2
27.5°	271.5
30°	249.1
32.5°	229.3
35°	214.8
37.5°	204.3
40°	196.3
42.5°	189.8
45°	183.2
47.5°	176.6
50°	168.7
52.5°	160.8
55°	151.5
57.5°	143.6
60°	134.4
62.5°	123.9
65°	114.6
67.5°	105.4
70°	96.2
72.5°	87.0
75°	79.1
77.5°	71.2
80°	64.6
82.5°	58.0
85°	51.4
87.5°	46.1
90°	40.9
92.5°	36.9
95°	31.6
97.5°	23.7
100°	15.8
102.5°	9.2
105°	5.3
107.5°	2.6
110°	1.3



TEST NUMBER: P229249

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9027-6LBW1LI-GFF

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)