

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229193

Luminaire Tested: **340-6B-20-D010 / 340-EU6B-1020-9035-6LBW1LI-CF**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229193
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-12)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-20-D010 / 340-EU6B-1020-9035-6LBW1LI-CF
Description: FARALLON 6" LED GLASS DOWNLIGHT. CYLINDRICAL FROSTED GLASS KIT.
Light Source: (1) 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1205.3 lumens
Efficiency: N/A
Efficacy: 57.9 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.55
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229193

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9035-6LBW1LI-CF

Luminous Intensity Polar Plot

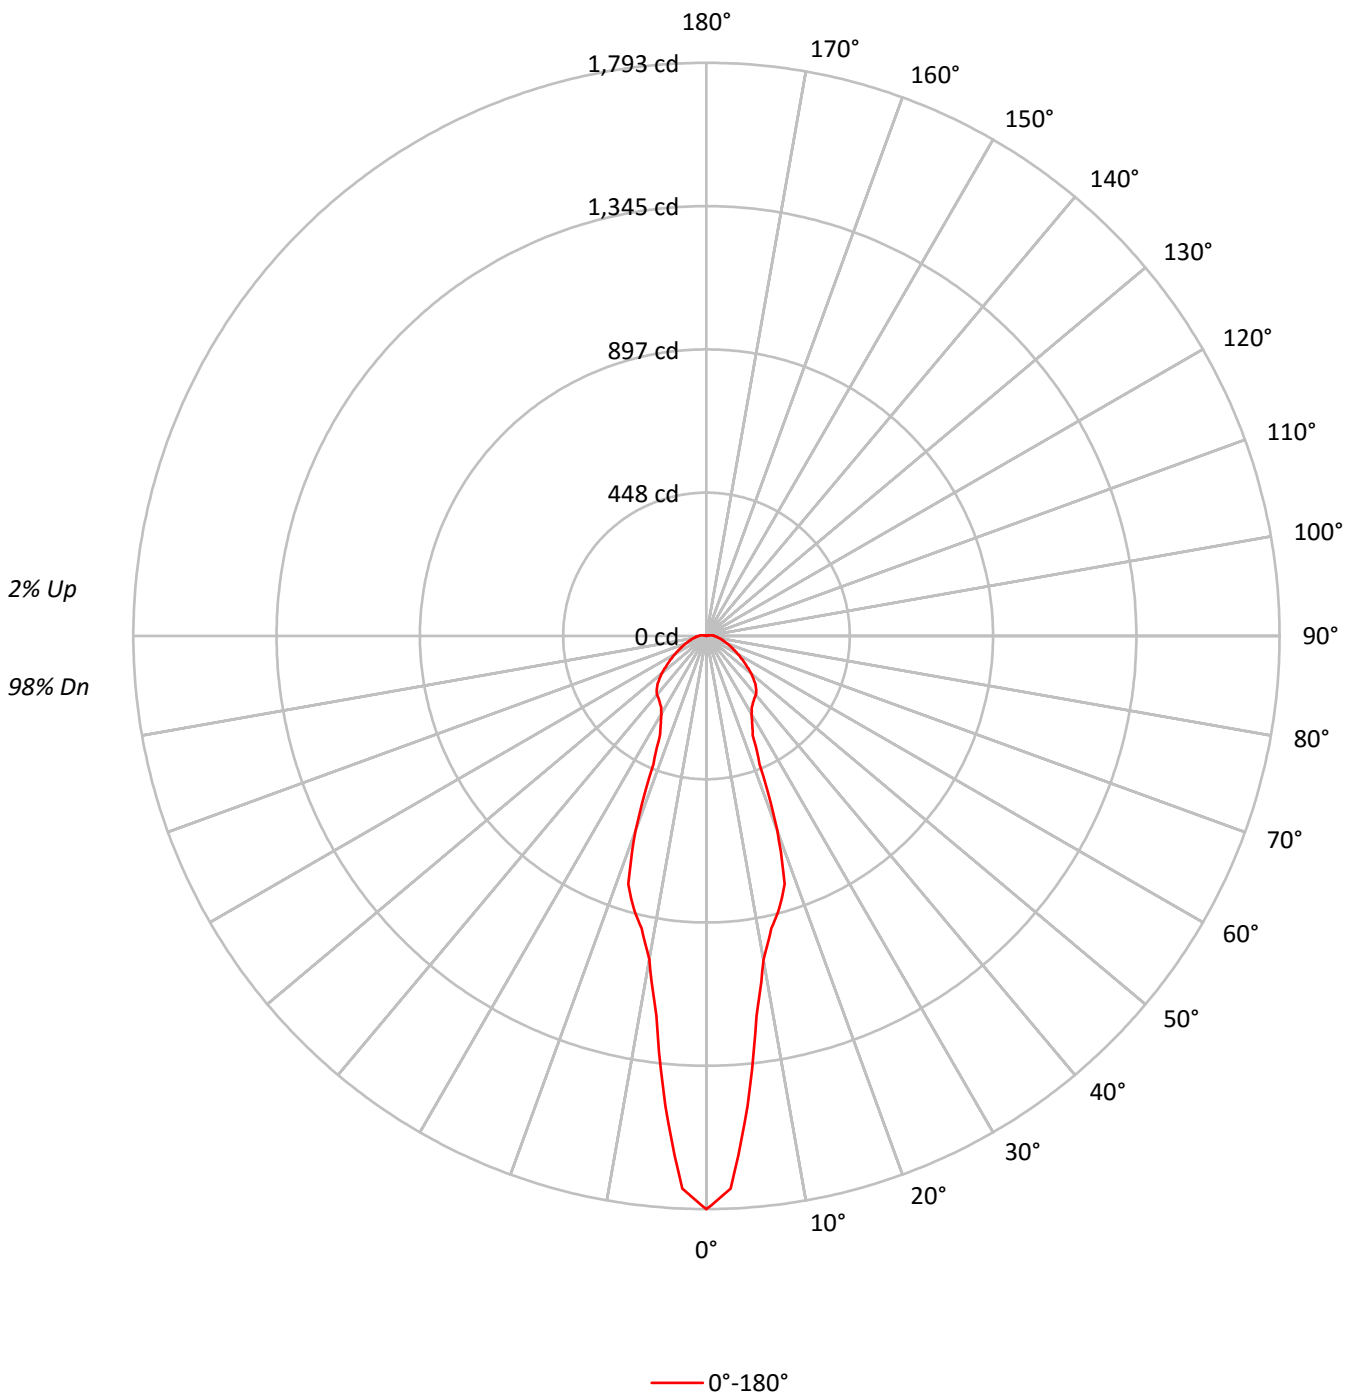



TEST NUMBER: P229193

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9035-6LBW1LI-CF

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	109	105	101	98	107	103	99	96	98	95	93	94	92	90	90	88	87	84
2	101	94	88	83	99	92	87	82	88	84	80	85	81	78	82	79	76	74
3	94	85	78	72	92	83	77	72	80	75	70	77	73	69	75	71	67	65
4	88	77	70	64	85	76	69	64	73	67	63	71	66	62	69	64	61	59
5	82	71	63	58	80	70	63	57	68	61	56	66	60	56	64	59	55	53
6	77	66	58	52	75	65	57	52	63	56	52	61	55	51	59	54	50	49
7	73	61	53	48	71	60	53	48	58	52	47	57	51	47	55	50	47	45
8	69	57	50	44	67	56	49	44	55	48	44	53	48	44	52	47	43	42
9	65	53	46	41	64	53	46	41	52	45	41	50	45	41	49	44	40	39
10	62	50	43	39	61	50	43	39	49	43	38	48	42	38	47	42	38	36

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	116996
5°	86326
10°	54892
15°	43631
20°	30083
25°	15126
30°	11908
35°	10378
40°	9566
45°	8480
50°	7052
55°	5590
60°	4433
65°	3508
70°	2742
75°	2191
80°	1798
85°	1448



TEST NUMBER: P229193

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9035-6LBW1LI-CF

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.6	10.4
10°-20°	241.1	20.0
20°-30°	175.1	14.5
30°-40°	160.6	13.3
40°-50°	165.7	13.8
50°-60°	130.2	10.8
60°-70°	88.5	7.3
70°-80°	56.7	4.7
80°-90°	35.0	2.9
90°-100°	20.3	1.7
100°-110°	6.1	0.5
110°-120°	0.2	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	541.8	45.0
0°-40°	702.5	58.3
0°-60°	998.4	82.8
0°-90°	1178.7	97.8
90°-120°	26.6	2.2
90°-150°	26.6	2.2
90°-180°	27.0	2.2
0°-180°	1205.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1793	
5°	1475	126
15°	881	241
25°	343	175
35°	254	161
45°	217	166
55°	145	130
65°	89	89
75°	53	57
85°	32	28
90°	24	13
95°	20	14
105°	6	6
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P229193

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9035-6LBW1LI-CF

CANDELA DISTRIBUTION (FULL):

0°	
0°	1793.3
2.5°	1730.8
5°	1475.0
7.5°	1198.3
10°	1027.3
12.5°	937.0
15°	881.4
17.5°	813.2
20°	647.8
22.5°	433.7
25°	343.4
27.5°	308.6
30°	282.2
32.5°	264.1
35°	254.4
37.5°	246.1
40°	240.5
42.5°	230.8
45°	216.9
47.5°	200.2
50°	182.1
52.5°	162.6
55°	144.6
57.5°	127.9
60°	114.0
62.5°	100.1
65°	89.0
67.5°	77.8
70°	68.1
72.5°	59.8
75°	52.8
77.5°	47.3
80°	41.7
82.5°	36.1
85°	32.0
87.5°	27.8
90°	23.6
92.5°	22.2
95°	19.5
97.5°	15.3
100°	11.1
102.5°	8.3
105°	5.6
107.5°	2.8
110°	1.4



TEST NUMBER: P229193

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9035-6LBW1LI-CF

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)