

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229135

Luminaire Tested: **340-6B-20-D010 / 340-EU6B-1020-9035-6LBW1LI-FF**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229135
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-10)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-20-D010 / 340-EU6B-1020-9035-6LBW1LI-FF
Description: FARALLON 6" LED GLASS DOWNLIGHT. FLARED FROSTED GLASS KIT.
Light Source: (1) 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1109.5 lumens
Efficiency: N/A
Efficacy: 53.3 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.81
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229135

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9035-6LBW1LI-FF

Luminous Intensity Polar Plot

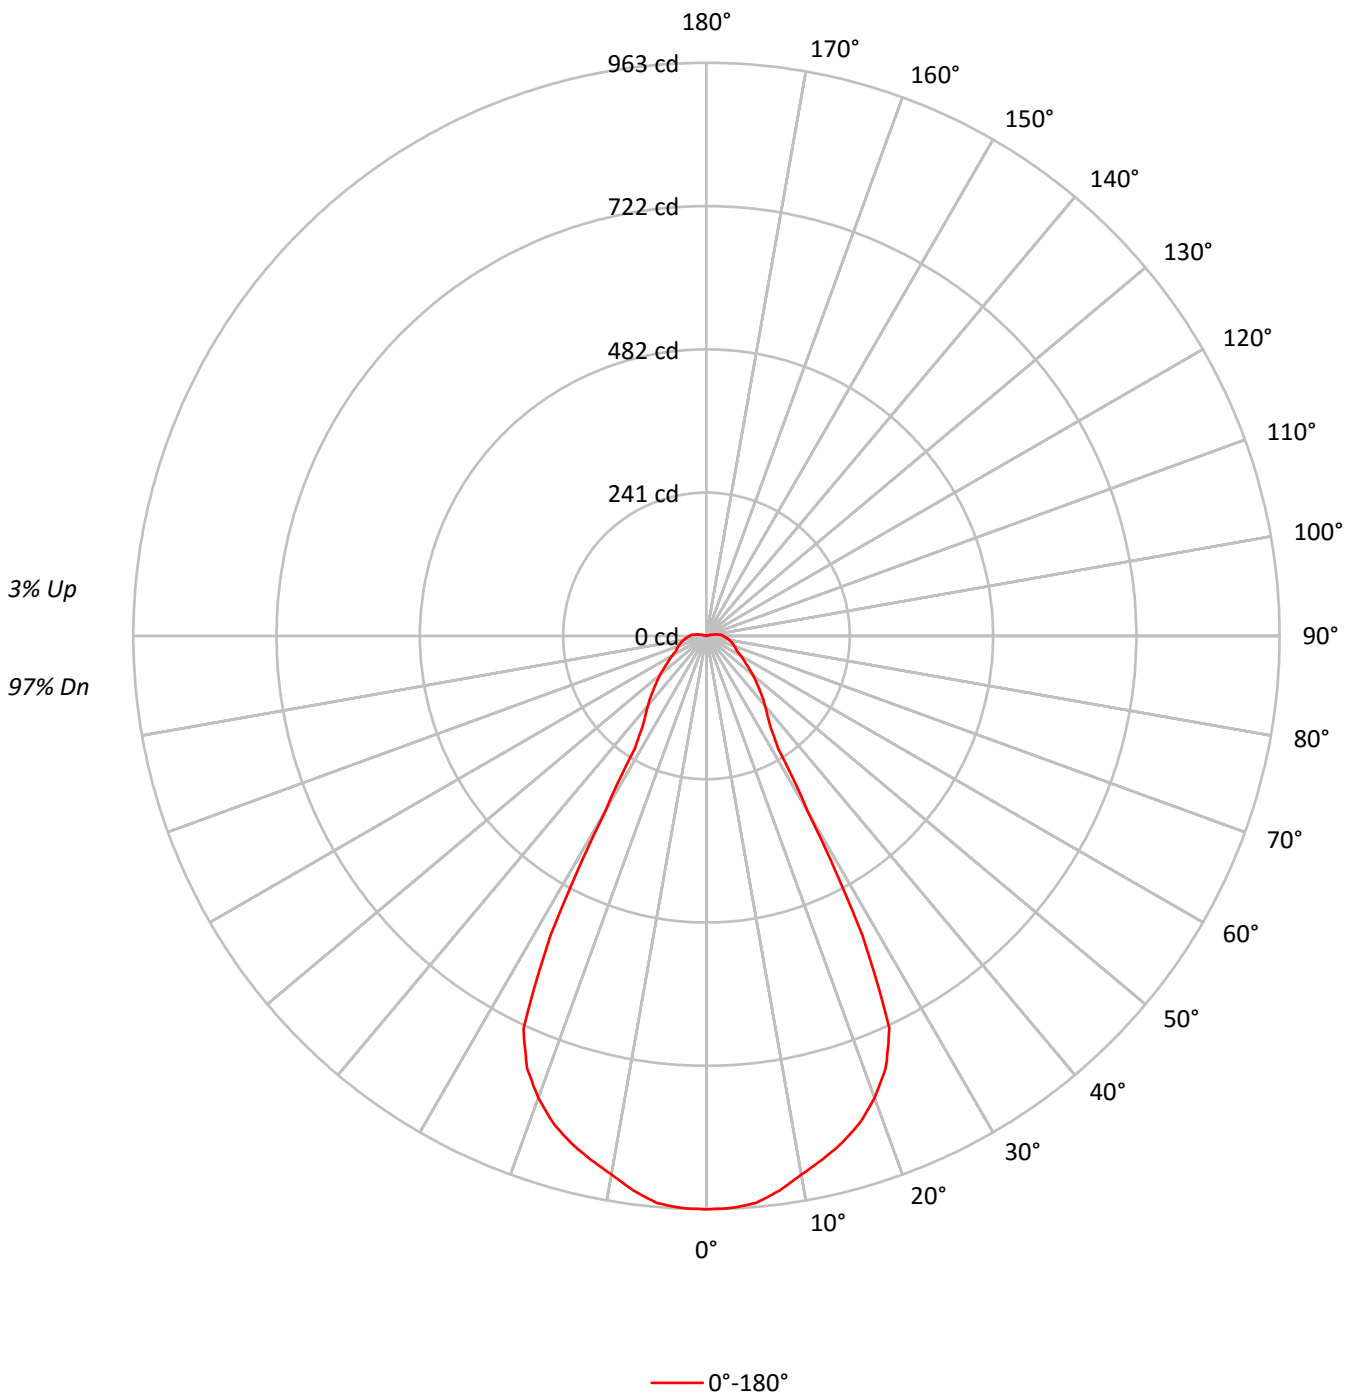



TEST NUMBER: P229135

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9035-6LBW1LI-FF

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	118	118	118	118	115	115	115	115	110	110	110	104	104	104	99	99	99	97
1	110	106	102	99	107	103	100	97	99	96	93	94	92	90	90	89	87	85
2	102	96	90	86	100	94	89	84	90	86	82	86	83	80	83	80	78	76
3	96	87	81	76	93	86	80	75	83	77	73	80	75	72	77	73	70	68
4	90	80	73	68	88	79	72	67	76	71	66	74	69	65	71	67	64	62
5	85	74	67	62	83	73	66	61	71	65	61	69	64	60	67	62	59	57
6	80	69	62	57	78	68	61	56	66	60	56	64	59	55	63	58	54	53
7	75	64	57	52	74	64	57	52	62	56	52	60	55	51	59	54	51	49
8	71	60	53	49	70	60	53	48	58	52	48	57	52	48	56	51	47	46
9	68	57	50	45	66	56	50	45	55	49	45	54	48	45	53	48	44	43
10	64	53	47	43	63	53	47	42	52	46	42	51	46	42	50	45	42	40

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	62853
5°	55974
10°	49100
15°	43631
20°	38350
25°	32028
30°	14373
35°	7657
40°	6081
45°	4891
50°	3931
55°	3116
60°	2594
65°	2191
70°	2014
75°	1846
80°	1677
85°	1511



TEST NUMBER: P229135

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9035-6LBW1LI-FF

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	90.0	8.1
10°-20°	247.6	22.3
20°-30°	302.0	27.2
30°-40°	127.9	11.5
40°-50°	97.0	8.7
50°-60°	73.5	6.6
60°-70°	56.1	5.1
70°-80°	47.0	4.2
80°-90°	36.4	3.3
90°-100°	24.3	2.2
100°-110°	7.2	0.7
110°-120°	0.5	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	639.6	57.6
0°-40°	767.5	69.2
0°-60°	937.9	84.5
0°-90°	1077.5	97.1
90°-120°	32.0	2.9
90°-150°	32.0	2.9
90°-180°	32.0	2.9
0°-180°	1109.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	963	
5°	956	90
15°	881	248
25°	727	302
35°	188	128
45°	125	97
55°	81	73
65°	56	56
75°	44	47
85°	33	28
90°	28	15
95°	24	17
105°	6	7
115°	0	1
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229135

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9035-6LBW1LI-FF

CANDELA DISTRIBUTION (FULL):

0°	
0°	963.4
2.5°	962.0
5°	956.4
7.5°	939.8
10°	918.9
12.5°	900.8
15°	881.4
17.5°	857.7
20°	825.8
22.5°	786.8
25°	727.1
27.5°	567.2
30°	340.6
32.5°	223.8
35°	187.7
37.5°	168.2
40°	152.9
42.5°	139.0
45°	125.1
47.5°	112.6
50°	101.5
52.5°	90.4
55°	80.6
57.5°	73.7
60°	66.7
62.5°	59.8
65°	55.6
67.5°	52.8
70°	50.0
72.5°	47.3
75°	44.5
77.5°	41.7
80°	38.9
82.5°	36.1
85°	33.4
87.5°	30.6
90°	27.8
92.5°	26.4
95°	23.6
97.5°	18.1
100°	13.9
102.5°	9.7
105°	5.6
107.5°	4.2
110°	1.4



TEST NUMBER: P229135

CATALOG NUMBER: 340-6B-20-D010 / 340-EU6B-1020-9035-6LBW1LI-FF

CANDELA DISTRIBUTION (continued):

	0°
112.5°	1.4
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)