

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229198

Luminaire Tested: **340-6B-30-D010 / 340-EU6B-3040-9030-6LBW1LI-CF**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229198
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-12)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-30-D010 / 340-EU6B-3040-9030-6LBW1LI-CF
Description: FARALLON 6" LED GLASS DOWNLIGHT. CYLINDRICAL FROSTED GLASS KIT.
Light Source: (1) 3000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1722.7 lumens
Efficiency: N/A
Efficacy: 61.5 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.55
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229198

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9030-6LBW1LI-CF

Luminous Intensity Polar Plot

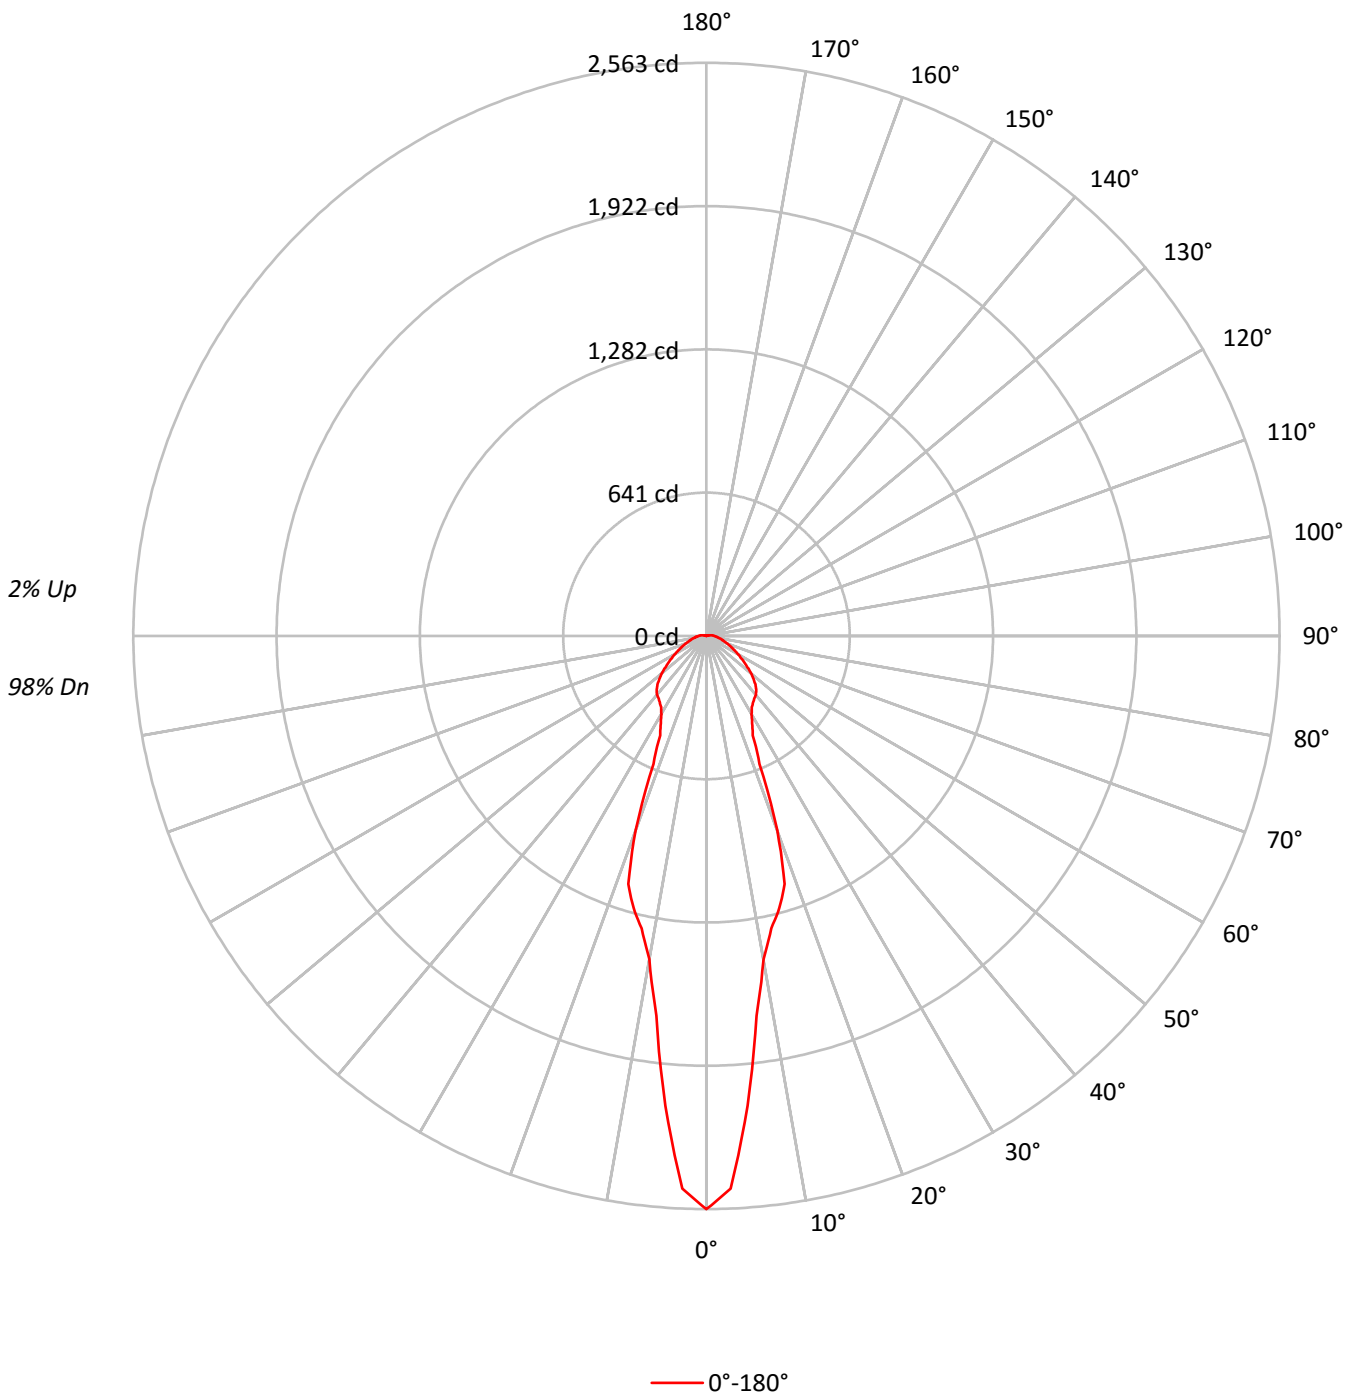



TEST NUMBER: P229198

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9030-6LBW1LI-CF

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	109	105	101	98	107	103	99	96	98	95	93	94	92	90	90	88	87	84
2	101	94	88	83	99	92	87	82	88	84	80	85	81	78	82	79	76	74
3	94	85	78	72	92	83	77	72	80	75	70	77	73	69	75	71	67	65
4	88	77	70	64	85	76	69	64	73	67	63	71	66	62	69	64	61	59
5	82	71	63	58	80	70	63	57	68	61	56	66	60	56	64	59	55	53
6	77	66	58	52	75	65	57	52	63	56	52	61	55	51	59	54	50	49
7	73	61	53	48	71	60	53	48	58	52	47	57	51	47	55	50	47	45
8	69	57	50	44	67	56	49	44	55	48	44	53	48	44	52	47	43	42
9	65	53	46	41	64	53	46	41	52	45	41	50	45	41	49	44	40	39
10	62	50	43	39	61	50	43	39	49	43	38	48	42	38	47	42	38	36

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	167218
5°	123378
10°	78456
15°	62358
20°	42998
25°	21619
30°	17019
35°	14833
40°	13670
45°	12119
50°	10081
55°	7987
60°	6334
65°	5014
70°	3922
75°	3132
80°	2570
85°	2068



TEST NUMBER: P229198

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9030-6LBW1LI-CF

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	179.5	10.4
10°-20°	344.6	20.0
20°-30°	250.3	14.5
30°-40°	229.6	13.3
40°-50°	236.8	13.7
50°-60°	186.1	10.8
60°-70°	126.6	7.3
70°-80°	81.1	4.7
80°-90°	50.1	2.9
90°-100°	29.0	1.7
100°-110°	8.7	0.5
110°-120°	0.3	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	774.4	45.0
0°-40°	1004.0	58.3
0°-60°	1426.9	82.8
0°-90°	1684.7	97.8
90°-120°	38.0	2.2
90°-150°	38.0	2.2
90°-180°	38.0	2.2
0°-180°	1722.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2563	
5°	2108	179
15°	1260	345
25°	491	250
35°	364	230
45°	310	237
55°	207	186
65°	127	127
75°	76	81
85°	46	40
90°	34	19
95°	28	20
105°	8	9
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0

TEST NUMBER: P229198

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9030-6LBW1LI-CF

CANDELA DISTRIBUTION (FULL):

0°	
0°	2563.1
2.5°	2473.7
5°	2108.1
7.5°	1712.7
10°	1468.3
12.5°	1339.2
15°	1259.7
17.5°	1162.3
20°	925.9
22.5°	619.9
25°	490.8
27.5°	441.1
30°	403.3
32.5°	377.5
35°	363.6
37.5°	351.7
40°	343.7
42.5°	329.8
45°	310.0
47.5°	286.1
50°	260.3
52.5°	232.5
55°	206.6
57.5°	182.8
60°	162.9
62.5°	143.1
65°	127.2
67.5°	111.3
70°	97.4
72.5°	85.4
75°	75.5
77.5°	67.6
80°	59.6
82.5°	51.7
85°	45.7
87.5°	39.7
90°	33.8
92.5°	31.8
95°	27.8
97.5°	21.9
100°	15.9
102.5°	11.9
105°	7.9
107.5°	4.0
110°	2.0



TEST NUMBER: P229198

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9030-6LBW1LI-CF

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)