

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: SHAPER

Report Number: P229256

Luminaire Tested: **340-6B-30-D010 / 340-EU6B-3040-9030-6LBW1LI-GFF**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P229256  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-14)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: SHAPER  
Catalog Number: 340-6B-30-D010 / 340-EU6B-3040-9030-6LBW1LI-GFF  
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, FROSTED INSIDE, FROSTED OUTSIDE GLASS KIT.  
Light Source: (1) 3000K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1628.3 lumens  
Efficiency: N/A  
Efficacy: 58.2 lumens/watt  
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.63  
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P229256

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9030-6LBW1LI-GFF

### Luminous Intensity Polar Plot

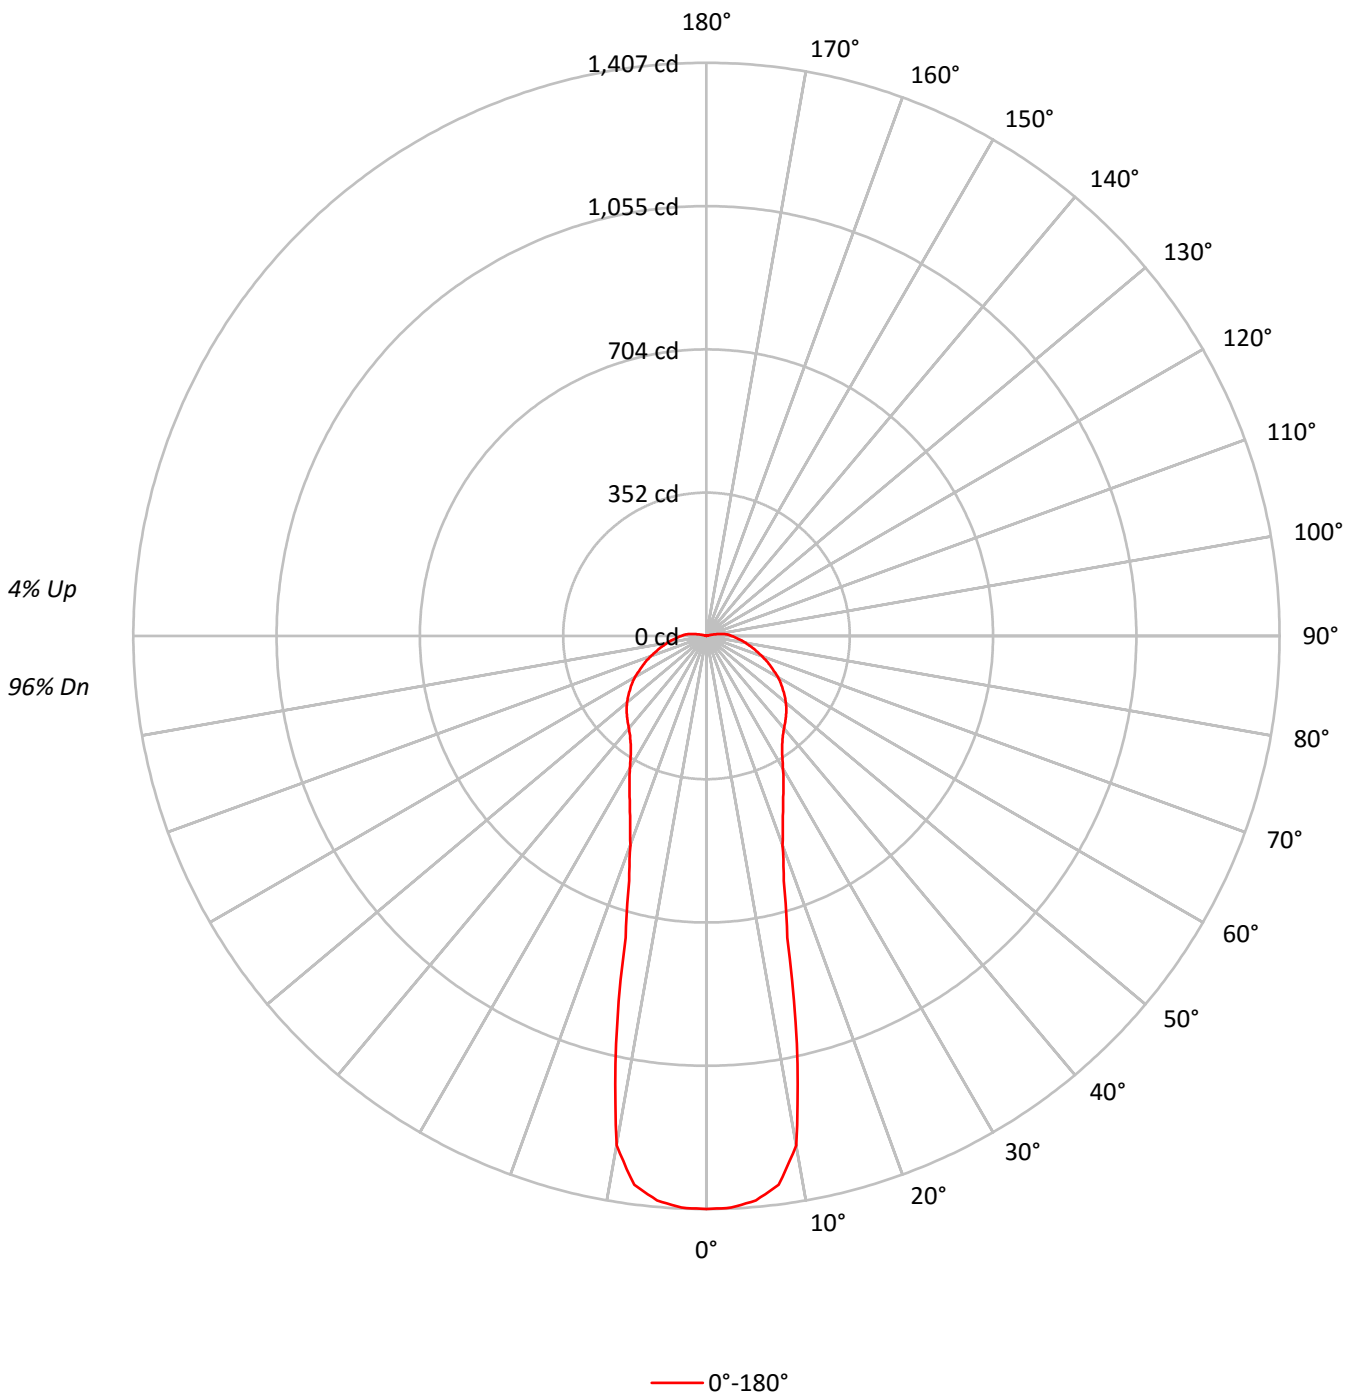



TEST NUMBER: P229256

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9030-6LBW1LI-GFF

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |    |    |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|----|----|----|----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20 |    |    |    |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10 | 0  |    |    |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50 | 30 | 10 | 0  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |    |    |    |    |
| 0   | 118 | 118 | 118 | 118 | 115 | 115 | 115 | 115 | 109 | 109 | 109 |  | 104 | 104 | 104 |  | 99 | 99 | 99 | 96 |
| 1   | 107 | 102 | 97  | 93  | 104 | 99  | 95  | 91  | 94  | 91  | 88  |  | 90  | 87  | 84  |  | 85 | 83 | 81 | 79 |
| 2   | 98  | 89  | 82  | 77  | 95  | 87  | 81  | 75  | 83  | 78  | 73  |  | 79  | 75  | 71  |  | 76 | 72 | 69 | 66 |
| 3   | 90  | 79  | 71  | 65  | 87  | 77  | 70  | 64  | 74  | 68  | 62  |  | 71  | 65  | 61  |  | 68 | 63 | 59 | 57 |
| 4   | 83  | 71  | 63  | 56  | 80  | 70  | 62  | 56  | 67  | 60  | 54  |  | 64  | 58  | 53  |  | 61 | 56 | 52 | 50 |
| 5   | 77  | 65  | 56  | 49  | 75  | 63  | 55  | 49  | 61  | 54  | 48  |  | 58  | 52  | 47  |  | 56 | 51 | 47 | 44 |
| 6   | 72  | 59  | 50  | 44  | 70  | 58  | 50  | 44  | 56  | 49  | 43  |  | 54  | 47  | 43  |  | 52 | 46 | 42 | 40 |
| 7   | 67  | 54  | 46  | 40  | 65  | 53  | 45  | 40  | 51  | 44  | 39  |  | 50  | 43  | 39  |  | 48 | 43 | 38 | 36 |
| 8   | 63  | 50  | 42  | 37  | 61  | 49  | 42  | 36  | 48  | 41  | 36  |  | 46  | 40  | 36  |  | 45 | 39 | 35 | 33 |
| 9   | 60  | 47  | 39  | 34  | 58  | 46  | 39  | 34  | 45  | 38  | 33  |  | 43  | 37  | 33  |  | 42 | 37 | 33 | 31 |
| 10  | 56  | 44  | 36  | 31  | 55  | 43  | 36  | 31  | 42  | 35  | 31  |  | 41  | 35  | 31  |  | 40 | 34 | 30 | 29 |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 91781 |
| 5°  | 81404 |
| 10° | 67844 |
| 15° | 37968 |
| 20° | 25374 |
| 25° | 19606 |
| 30° | 15845 |
| 35° | 13213 |
| 40° | 11777 |
| 45° | 10798 |
| 50° | 9848  |
| 55° | 8833  |
| 60° | 7882  |
| 65° | 6815  |
| 70° | 5839  |
| 75° | 4945  |
| 80° | 4200  |
| 85° | 3506  |



TEST NUMBER: P229256

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9030-6LBW1LI-GFF

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 129.3  | 7.9       |
| 10°-20°   | 225.2  | 13.8      |
| 20°-30°   | 206.5  | 12.7      |
| 30°-40°   | 205.3  | 12.6      |
| 40°-50°   | 213.3  | 13.1      |
| 50°-60°   | 205.0  | 12.6      |
| 60°-70°   | 171.5  | 10.5      |
| 70°-80°   | 126.4  | 7.8       |
| 80°-90°   | 85.6   | 5.3       |
| 90°-100°  | 49.6   | 3.0       |
| 100°-110° | 10.3   | 0.6       |
| 110°-120° | 0.3    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 561.0  | 34.5      |
| 0°-40°    | 766.3  | 47.1      |
| 0°-60°    | 1184.6 | 72.7      |
| 0°-90°    | 1568.1 | 96.3      |
| 90°-120°  | 60.2   | 3.7       |
| 90°-150°  | 60.2   | 3.7       |
| 90°-180°  | 60.0   | 3.7       |
| 0°-180°   | 1628.3 | 100.0     |

**CANDELA DISTRIBUTION:**

|      | 0°   | Flux |
|------|------|------|
| 0°   | 1407 |      |
| 5°   | 1391 | 129  |
| 15°  | 767  | 225  |
| 25°  | 445  | 207  |
| 35°  | 324  | 205  |
| 45°  | 276  | 213  |
| 55°  | 228  | 205  |
| 65°  | 173  | 171  |
| 75°  | 119  | 126  |
| 85°  | 78   | 68   |
| 90°  | 62   | 34   |
| 95°  | 48   | 34   |
| 105° | 8    | 10   |
| 115° | 0    | 0    |
| 125° | 0    | 0    |
| 135° | 0    | 0    |
| 145° | 0    | 0    |
| 155° | 0    | 0    |
| 165° | 0    | 0    |
| 175° | 0    | 0    |
| 180° | 0    | 0    |



TEST NUMBER: P229256

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9030-6LBW1LI-GFF

**CANDELA DISTRIBUTION (FULL):**

| 0°     |        |
|--------|--------|
| 0°     | 1406.8 |
| 2.5°   | 1404.8 |
| 5°     | 1390.9 |
| 7.5°   | 1359.1 |
| 10°    | 1269.7 |
| 12.5°  | 1025.3 |
| 15°    | 767.0  |
| 17.5°  | 629.9  |
| 20°    | 546.4  |
| 22.5°  | 488.8  |
| 25°    | 445.1  |
| 27.5°  | 409.3  |
| 30°    | 375.5  |
| 32.5°  | 345.7  |
| 35°    | 323.9  |
| 37.5°  | 308.0  |
| 40°    | 296.1  |
| 42.5°  | 286.1  |
| 45°    | 276.2  |
| 47.5°  | 266.2  |
| 50°    | 254.3  |
| 52.5°  | 242.4  |
| 55°    | 228.5  |
| 57.5°  | 216.6  |
| 60°    | 202.7  |
| 62.5°  | 186.8  |
| 65°    | 172.9  |
| 67.5°  | 159.0  |
| 70°    | 145.0  |
| 72.5°  | 131.1  |
| 75°    | 119.2  |
| 77.5°  | 107.3  |
| 80°    | 97.4   |
| 82.5°  | 87.4   |
| 85°    | 77.5   |
| 87.5°  | 69.5   |
| 90°    | 61.6   |
| 92.5°  | 55.6   |
| 95°    | 47.7   |
| 97.5°  | 35.8   |
| 100°   | 23.8   |
| 102.5° | 13.9   |
| 105°   | 7.9    |
| 107.5° | 4.0    |
| 110°   | 2.0    |



TEST NUMBER: P229256

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9030-6LBW1LI-GFF

**CANDELA DISTRIBUTION (continued):**

|        | 0°  |
|--------|-----|
| 112.5° | 0.0 |
| 115°   | 0.0 |
| 117.5° | 0.0 |
| 120°   | 0.0 |
| 122.5° | 0.0 |
| 125°   | 0.0 |
| 127.5° | 0.0 |
| 130°   | 0.0 |
| 132.5° | 0.0 |
| 135°   | 0.0 |
| 137.5° | 0.0 |
| 140°   | 0.0 |
| 142.5° | 0.0 |
| 145°   | 0.0 |
| 147.5° | 0.0 |
| 150°   | 0.0 |
| 152.5° | 0.0 |
| 155°   | 0.0 |
| 157.5° | 0.0 |
| 160°   | 0.0 |
| 162.5° | 0.0 |
| 165°   | 0.0 |
| 167.5° | 0.0 |
| 170°   | 0.0 |
| 172.5° | 0.0 |
| 175°   | 0.0 |
| 177.5° | 0.0 |
| 180°   | 0.0 |

(END OF REPORT)