

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229228

Luminaire Tested: **340-6B-30-D010 / 340-EU6B-3040-9035-6LBW1LI-CQ**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229228
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-13)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-30-D010 / 340-EU6B-3040-9035-6LBW1LI-CQ
Description: FARALLON 6" LED GLASS DOWNLIGHT CYLINDRICAL FROSTED, QUADRATE ETCHED GLASS KIT.
Light Source: (1) 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1726.4 lumens
Efficiency: N/A
Efficacy: 61.7 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.54
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229228

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9035-6LBW1LI-CQ

Luminous Intensity Polar Plot

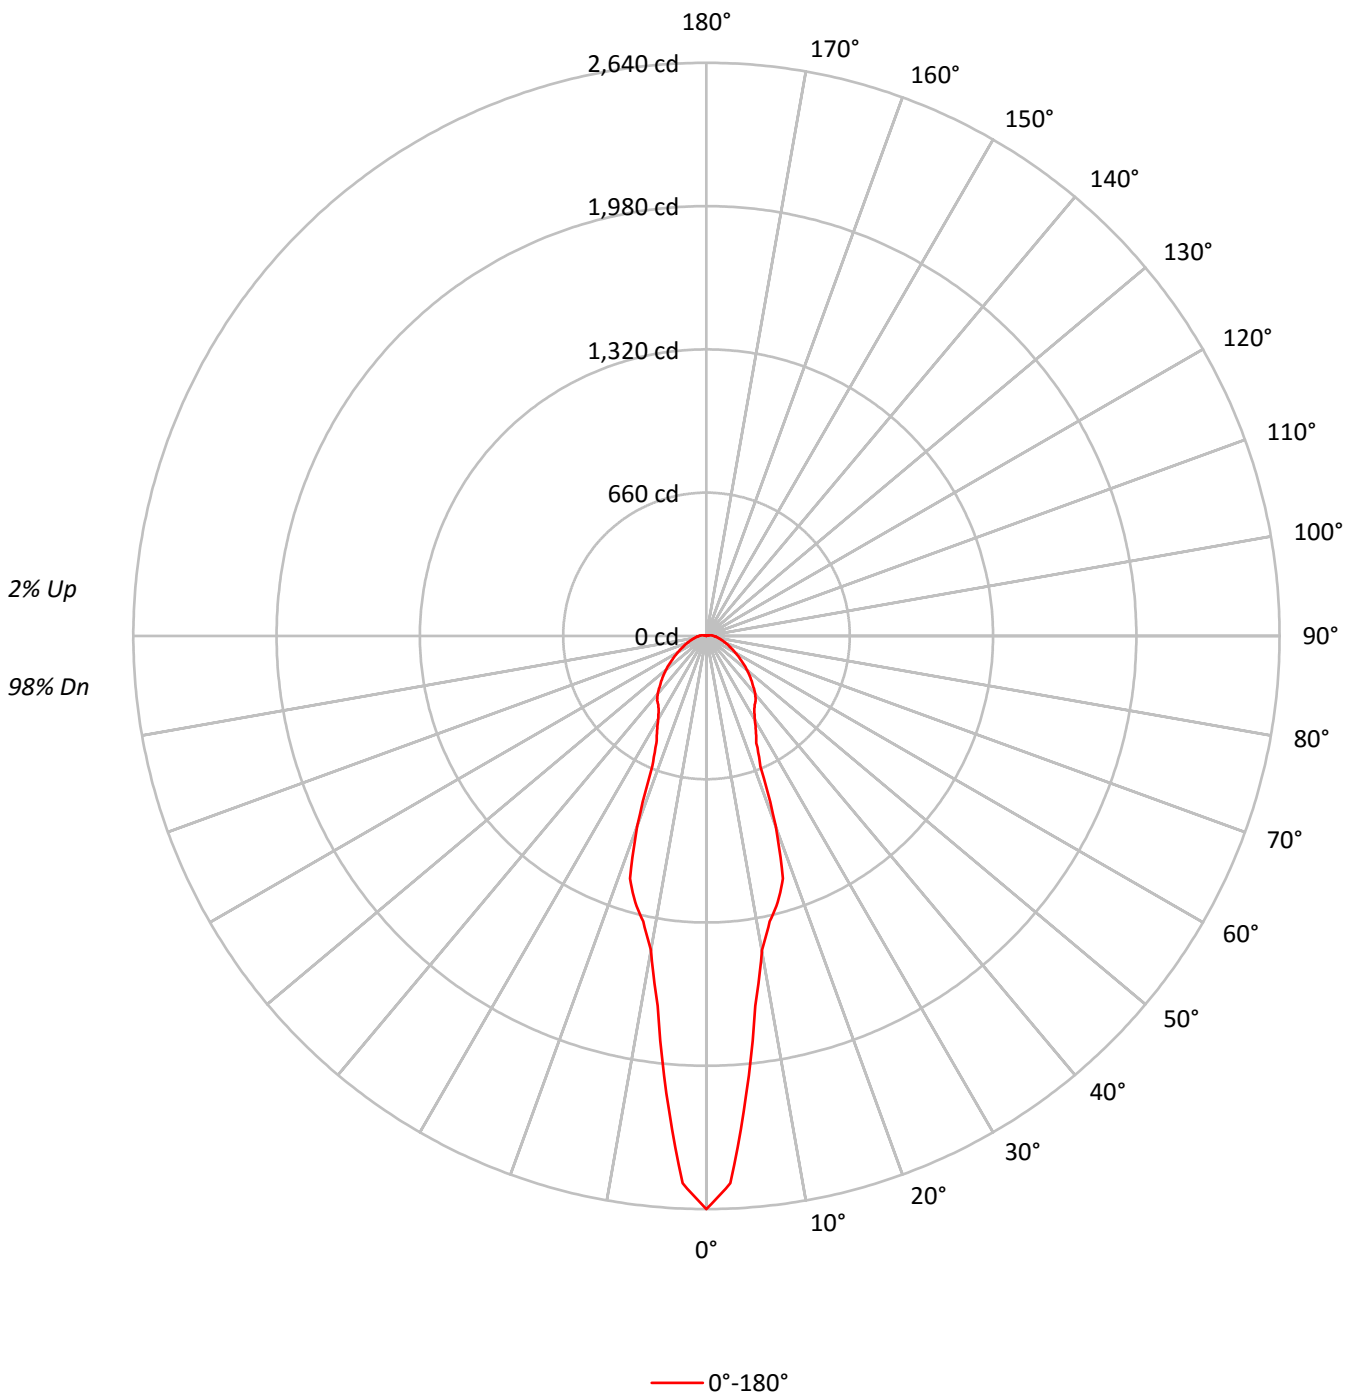



TEST NUMBER: P229228

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9035-6LBW1LI-CQ

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	110	105	102	98	107	103	100	97	98	96	93	94	92	90	90	89	87	85
2	102	95	89	84	99	93	87	83	89	84	81	85	82	78	82	79	76	74
3	95	86	79	73	92	84	78	72	81	75	71	78	73	70	75	71	68	66
4	88	78	71	65	86	77	70	64	74	68	63	72	67	62	69	65	61	59
5	83	72	64	58	81	71	63	58	68	62	57	66	61	57	64	60	56	54
6	78	66	59	53	76	65	58	53	63	57	52	62	56	52	60	55	51	49
7	73	62	54	49	71	61	54	49	59	53	48	58	52	48	56	51	47	46
8	69	58	50	45	68	57	50	45	55	49	45	54	48	44	53	48	44	42
9	66	54	47	42	64	53	47	42	52	46	42	51	45	41	50	45	41	40
10	62	51	44	40	61	50	44	39	49	43	39	48	43	39	47	42	39	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	172255
5°	123735
10°	78509
15°	62853
20°	43240
25°	23971
30°	18795
35°	15788
40°	13869
45°	11505
50°	9445
55°	7480
60°	5957
65°	4686
70°	3733
75°	3012
80°	2432
85°	2004



TEST NUMBER: P229228

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9035-6LBW1LI-CQ

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	180.7	10.5
10°-20°	346.7	20.1
20°-30°	269.2	15.6
30°-40°	244.9	14.2
40°-50°	227.2	13.2
50°-60°	174.9	10.1
60°-70°	119.6	6.9
70°-80°	77.7	4.5
80°-90°	48.3	2.8
90°-100°	28.0	1.6
100°-110°	8.9	0.5
110°-120°	0.3	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	796.6	46.1
0°-40°	1041.5	60.3
0°-60°	1443.6	83.6
0°-90°	1689.2	97.8
90°-120°	37.2	2.2
90°-150°	37.2	2.2
90°-180°	37.0	2.1
0°-180°	1726.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2640	
5°	2114	181
15°	1270	347
25°	544	269
35°	387	245
45°	294	227
55°	194	175
65°	119	120
75°	73	78
85°	44	39
90°	32	18
95°	26	19
105°	8	9
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229228

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9035-6LBW1LI-CQ

CANDELA DISTRIBUTION (FULL):

0°	
0°	2640.3
2.5°	2523.4
5°	2114.2
7.5°	1719.2
10°	1469.3
12.5°	1346.3
15°	1269.7
17.5°	1171.0
20°	931.1
22.5°	651.0
25°	544.2
27.5°	491.8
30°	445.4
32.5°	409.1
35°	387.0
37.5°	372.9
40°	348.7
42.5°	320.5
45°	294.3
47.5°	268.1
50°	243.9
52.5°	217.7
55°	193.5
57.5°	173.3
60°	153.2
62.5°	135.0
65°	118.9
67.5°	106.8
70°	92.7
72.5°	82.6
75°	72.6
77.5°	64.5
80°	56.4
82.5°	50.4
85°	44.3
87.5°	38.3
90°	32.2
92.5°	30.2
95°	26.2
97.5°	22.2
100°	16.1
102.5°	12.1
105°	8.1
107.5°	4.0
110°	2.0



TEST NUMBER: P229228

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9035-6LBW1LI-CQ

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)