

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229142

Luminaire Tested: **340-6B-30-D010 / 340-EU6B-3040-9040-6LBW1LI-FF**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229142
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-10)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-30-D010 / 340-EU6B-3040-9040-6LBW1LI-FF
Description: FARALLON 6" LED GLASS DOWNLIGHT. FLARED FROSTED GLASS KIT.
Light Source: (1) 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1611.0 lumens
Efficiency: N/A
Efficacy: 57.5 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.81
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229142

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9040-6LBW1LI-FF

Luminous Intensity Polar Plot

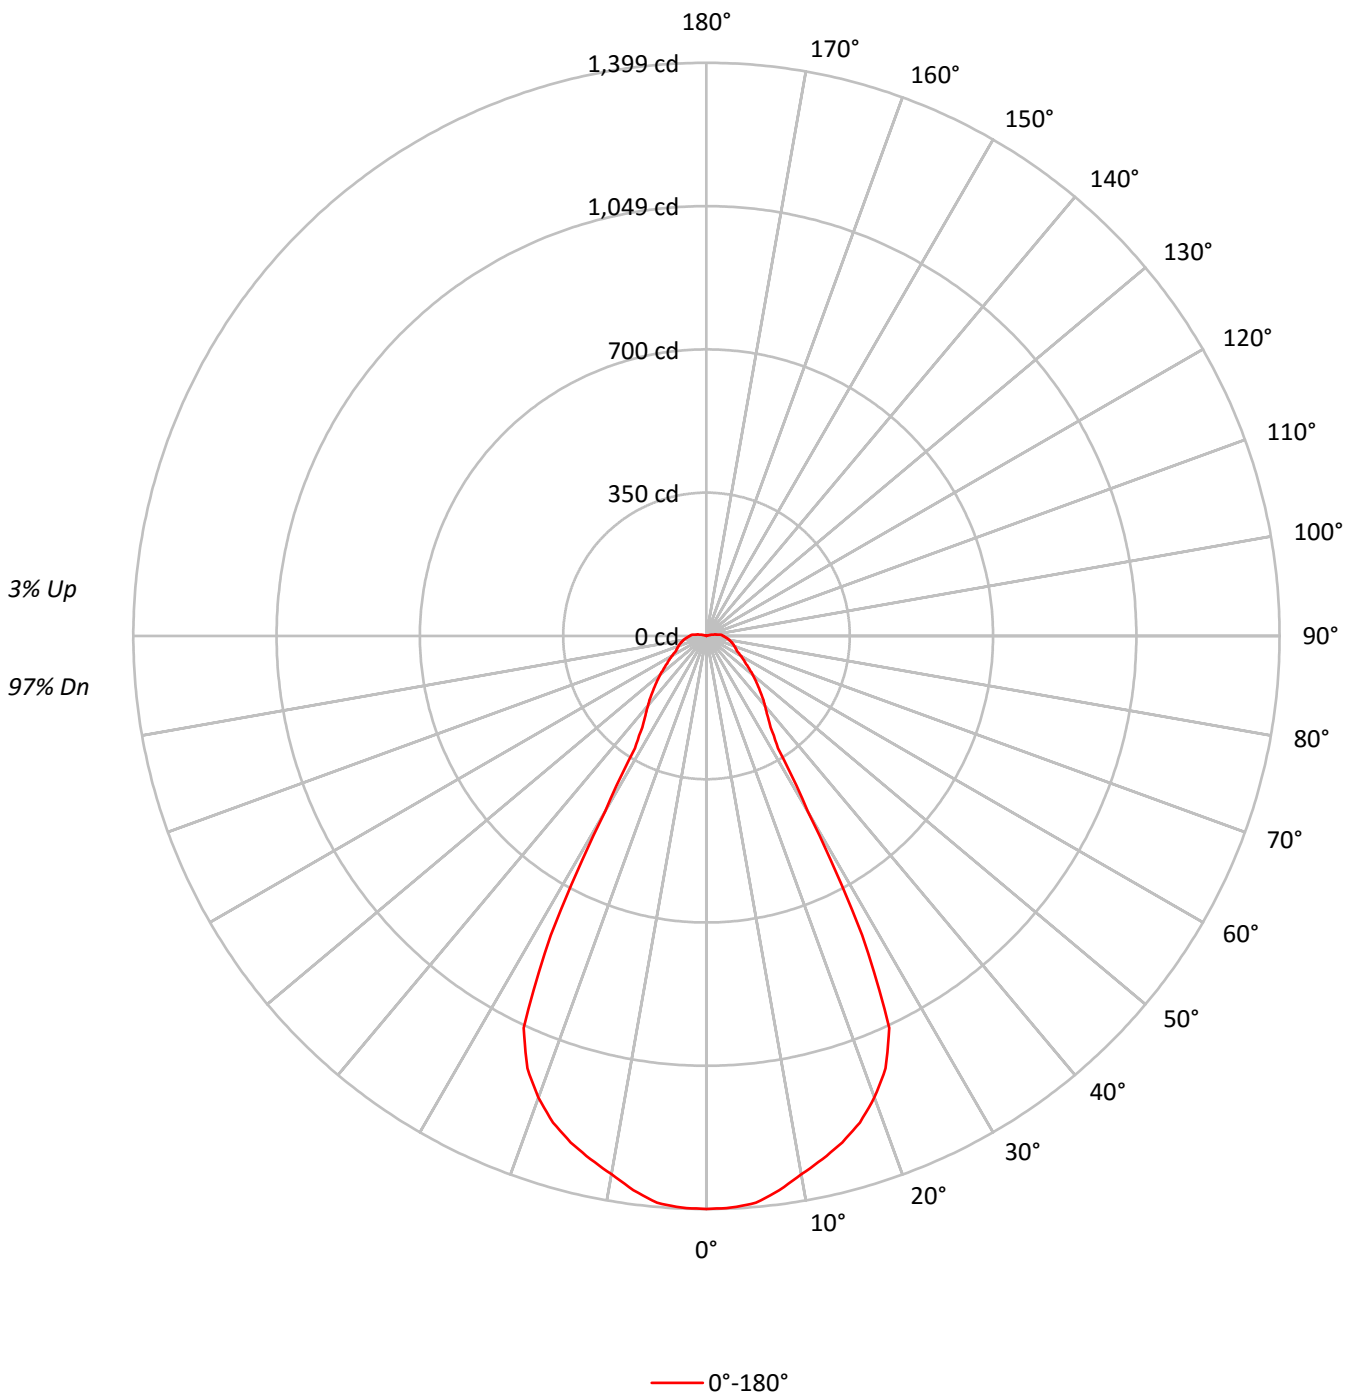



TEST NUMBER: P229142

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9040-6LBW1LI-FF

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	118	118	118	118	115	115	115	115	110	110	110	104	104	104	99	99	99	97
1	110	106	102	99	107	103	100	97	99	96	93	94	92	90	90	89	87	85
2	102	96	90	86	100	94	89	84	90	86	82	86	83	80	83	80	78	76
3	96	87	81	76	93	86	80	75	82	77	73	80	75	72	77	73	70	68
4	90	80	73	68	88	79	72	67	76	71	66	74	69	65	71	67	64	62
5	85	74	67	62	83	73	66	61	71	65	61	69	64	60	67	62	59	57
6	80	69	62	57	78	68	61	56	66	60	56	64	59	55	63	58	54	53
7	75	64	57	52	74	64	57	52	62	56	52	60	55	51	59	54	51	49
8	71	60	53	49	70	60	53	48	58	52	48	57	52	48	56	51	47	46
9	68	57	50	45	66	56	50	45	55	49	45	54	48	45	53	48	44	43
10	64	53	47	43	63	53	47	42	52	46	42	51	46	42	50	45	42	40

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	91259
5°	81281
10°	71296
15°	63353
20°	55681
25°	46503
30°	20867
35°	11117
40°	8830
45°	7103
50°	5708
55°	4527
60°	3768
65°	3181
70°	2928
75°	2680
80°	2436
85°	2190



TEST NUMBER: P229142

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9040-6LBW1LI-FF

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	130.7	8.1
10°-20°	359.5	22.3
20°-30°	438.5	27.2
30°-40°	185.6	11.5
40°-50°	140.9	8.7
50°-60°	106.7	6.6
60°-70°	81.5	5.1
70°-80°	68.3	4.2
80°-90°	52.8	3.3
90°-100°	35.3	2.2
100°-110°	10.5	0.7
110°-120°	0.8	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	928.7	57.6
0°-40°	1114.3	69.2
0°-60°	1361.9	84.5
0°-90°	1564.5	97.1
90°-120°	46.5	2.9
90°-150°	46.5	2.9
90°-180°	47.0	2.9
0°-180°	1611.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1399	
5°	1389	131
15°	1280	360
25°	1056	438
35°	272	186
45°	182	141
55°	117	107
65°	81	81
75°	65	68
85°	48	41
90°	40	22
95°	34	24
105°	8	10
115°	0	1
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229142

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9040-6LBW1LI-FF

CANDELA DISTRIBUTION (FULL):

0°	
0°	1398.8
2.5°	1396.8
5°	1388.8
7.5°	1364.5
10°	1334.3
12.5°	1308.0
15°	1279.8
17.5°	1245.4
20°	1199.0
22.5°	1142.5
25°	1055.7
27.5°	823.6
30°	494.5
32.5°	325.0
35°	272.5
37.5°	244.2
40°	222.0
42.5°	201.9
45°	181.7
47.5°	163.5
50°	147.4
52.5°	131.2
55°	117.1
57.5°	107.0
60°	96.9
62.5°	86.8
65°	80.7
67.5°	76.7
70°	72.7
72.5°	68.6
75°	64.6
77.5°	60.6
80°	56.5
82.5°	52.5
85°	48.4
87.5°	44.4
90°	40.4
92.5°	38.4
95°	34.3
97.5°	26.2
100°	20.2
102.5°	14.1
105°	8.1
107.5°	6.1
110°	2.0



TEST NUMBER: P229142

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9040-6LBW1LI-FF

CANDELA DISTRIBUTION (continued):

	0°
112.5°	2.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)