

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229316

Luminaire Tested: **340-6B-30-D010 / 340-EU6B-3040-9040-6LBW1LI-GCC**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229316
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-16)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-30-D010 / 340-EU6B-3040-9040-6LBW1LI-GCC
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE,
CLEAR OUTSIDE GLASS KIT.
Light Source: (1) 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2004.6 lumens
Efficiency: N/A
Efficacy: 71.6 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.89
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229316

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9040-6LBW1LI-GCC

Luminous Intensity Polar Plot

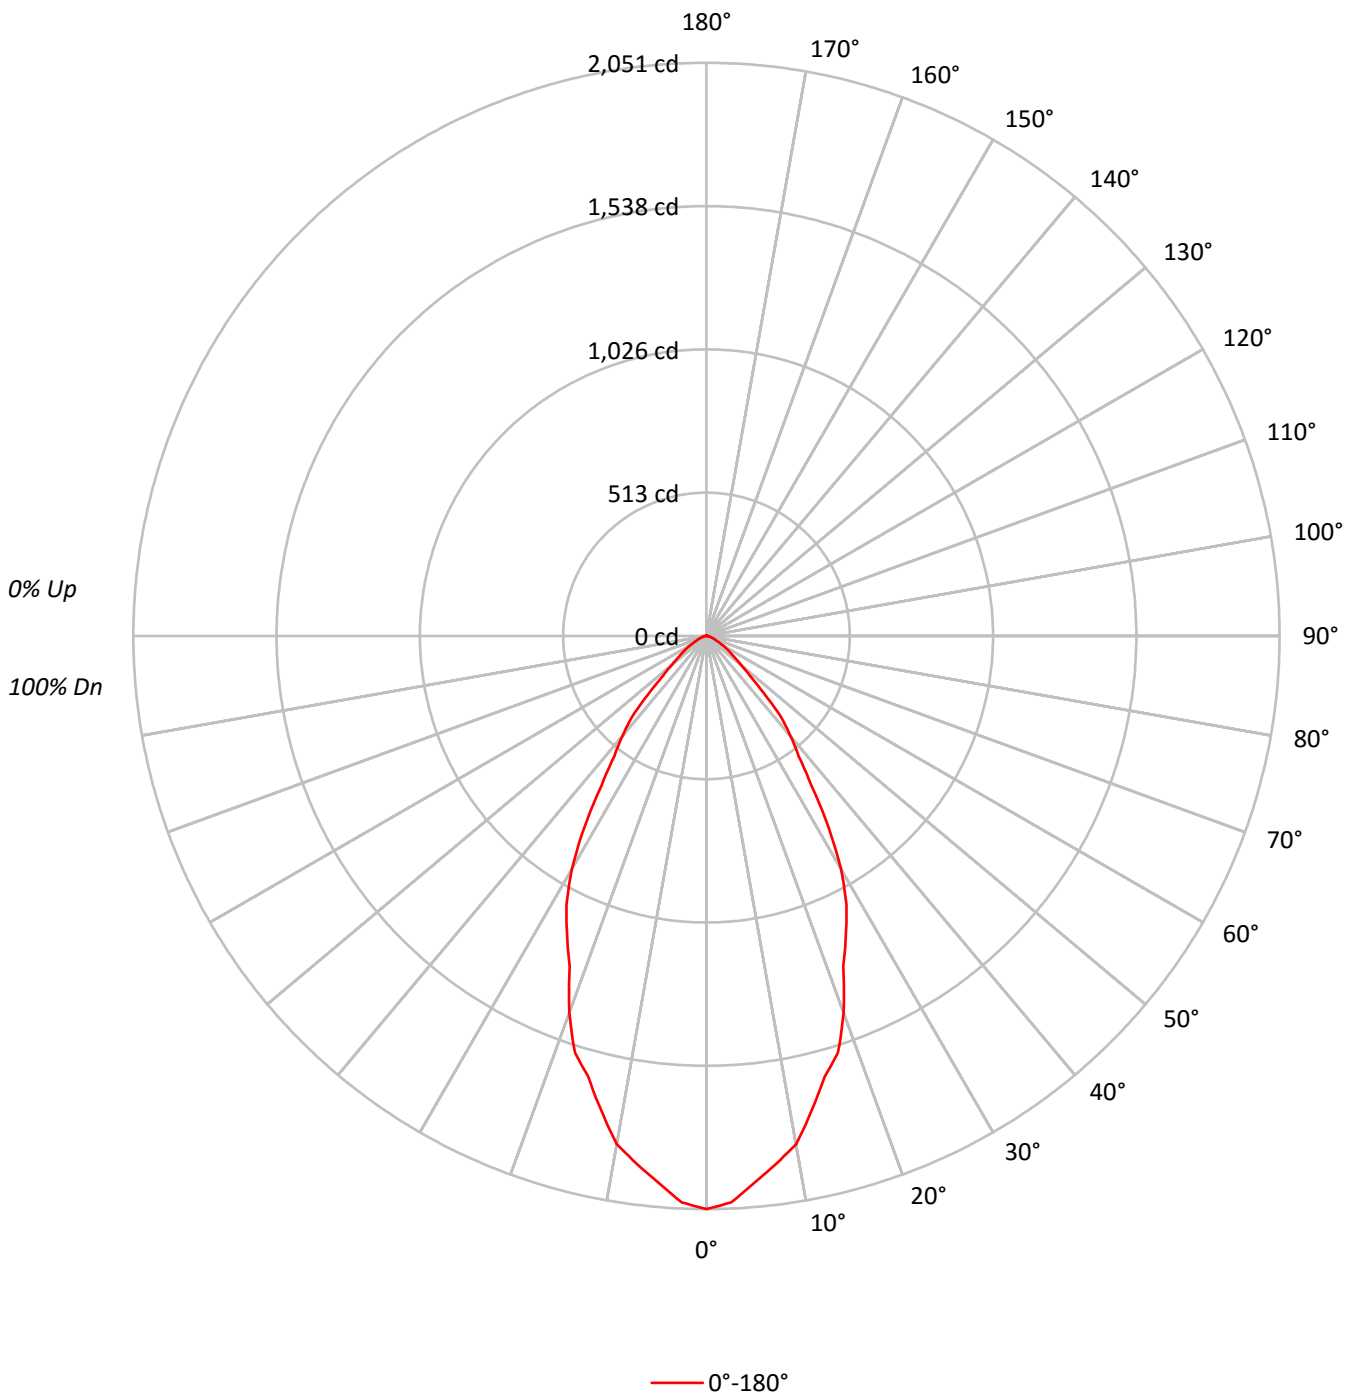



TEST NUMBER: P229316

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9040-6LBW1LI-GCC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	95	93	92
2	106	101	96	92	104	99	95	91	95	92	89		92	90	87		90	87	85	83
3	100	93	87	83	98	91	86	82	88	84	81		86	82	79		84	81	78	76
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78	74	71	70
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69	64	61	59
7	79	69	62	58	78	68	62	57	67	61	57		66	60	57		64	60	56	55
8	75	64	58	53	74	64	58	53	63	57	53		62	56	53		61	56	52	51
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57	52	49	48
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54	49	46	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	133795
5°	128622
10°	122358
15°	110296
20°	99643
25°	85000
30°	72531
35°	52247
40°	39883
45°	26821
50°	16595
55°	11943
60°	8690
65°	5928
70°	4998
75°	4058
80°	3795
85°	2994



TEST NUMBER: P229316

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9040-6LBW1LI-GCC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	184.0	9.2
10°-20°	460.6	23.0
20°-30°	542.9	27.1
30°-40°	422.1	21.1
40°-50°	231.6	11.6
50°-60°	96.5	4.8
60°-70°	40.8	2.0
70°-80°	17.5	0.9
80°-90°	4.9	0.2
90°-100°	2.2	0.1
100°-110°	1.3	0.1
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1187.5	59.2
0°-40°	1609.6	80.3
0°-60°	1937.7	96.7
0°-90°	2001.0	99.8
90°-120°	3.5	0.2
90°-150°	3.5	0.2
90°-180°	4.0	0.2
0°-180°	2004.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2051	
5°	1964	184
15°	1633	461
25°	1181	543
35°	656	422
45°	291	232
55°	105	97
65°	38	41
75°	16	18
85°	4	4
90°	2	1
95°	2	2
105°	2	1
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229316

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9040-6LBW1LI-GCC

CANDELA DISTRIBUTION (FULL):

0°	
0°	2050.8
2.5°	2028.6
5°	1964.0
7.5°	1905.5
10°	1847.0
12.5°	1740.0
15°	1633.0
17.5°	1564.4
20°	1435.2
22.5°	1279.7
25°	1180.8
27.5°	1084.0
30°	962.8
32.5°	815.5
35°	656.0
37.5°	541.0
40°	468.3
42.5°	397.7
45°	290.7
47.5°	209.9
50°	163.5
52.5°	129.2
55°	105.0
57.5°	84.8
60°	66.6
62.5°	48.4
65°	38.4
67.5°	32.3
70°	26.2
72.5°	20.2
75°	16.1
77.5°	12.1
80°	10.1
82.5°	6.1
85°	4.0
87.5°	2.0
90°	2.0
92.5°	2.0
95°	2.0
97.5°	2.0
100°	2.0
102.5°	2.0
105°	2.0
107.5°	0.0
110°	0.0



TEST NUMBER: P229316

CATALOG NUMBER: 340-6B-30-D010 / 340-EU6B-3040-9040-6LBW1LI-GCC

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)