

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: SHAPER

Report Number: P229320

Luminaire Tested: **340-6B-40-D010 / 340-EU6B-3040-9030-6LBW1LI-GCC**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P229320  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-16)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: SHAPER  
Catalog Number: 340-6B-40-D010 / 340-EU6B-3040-9030-6LBW1LI-GCC  
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE,  
CLEAR OUTSIDE GLASS KIT.  
Light Source: (1) 3000K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2789.5 lumens  
Efficiency: N/A  
Efficacy: 66.7 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.89  
Luminous Opening: Circular (Dia: 0.46' x H: 0')  
CIE Type: Direct


Input Watts (W): 41.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P229320

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9030-6LBW1LI-GCC

### Luminous Intensity Polar Plot

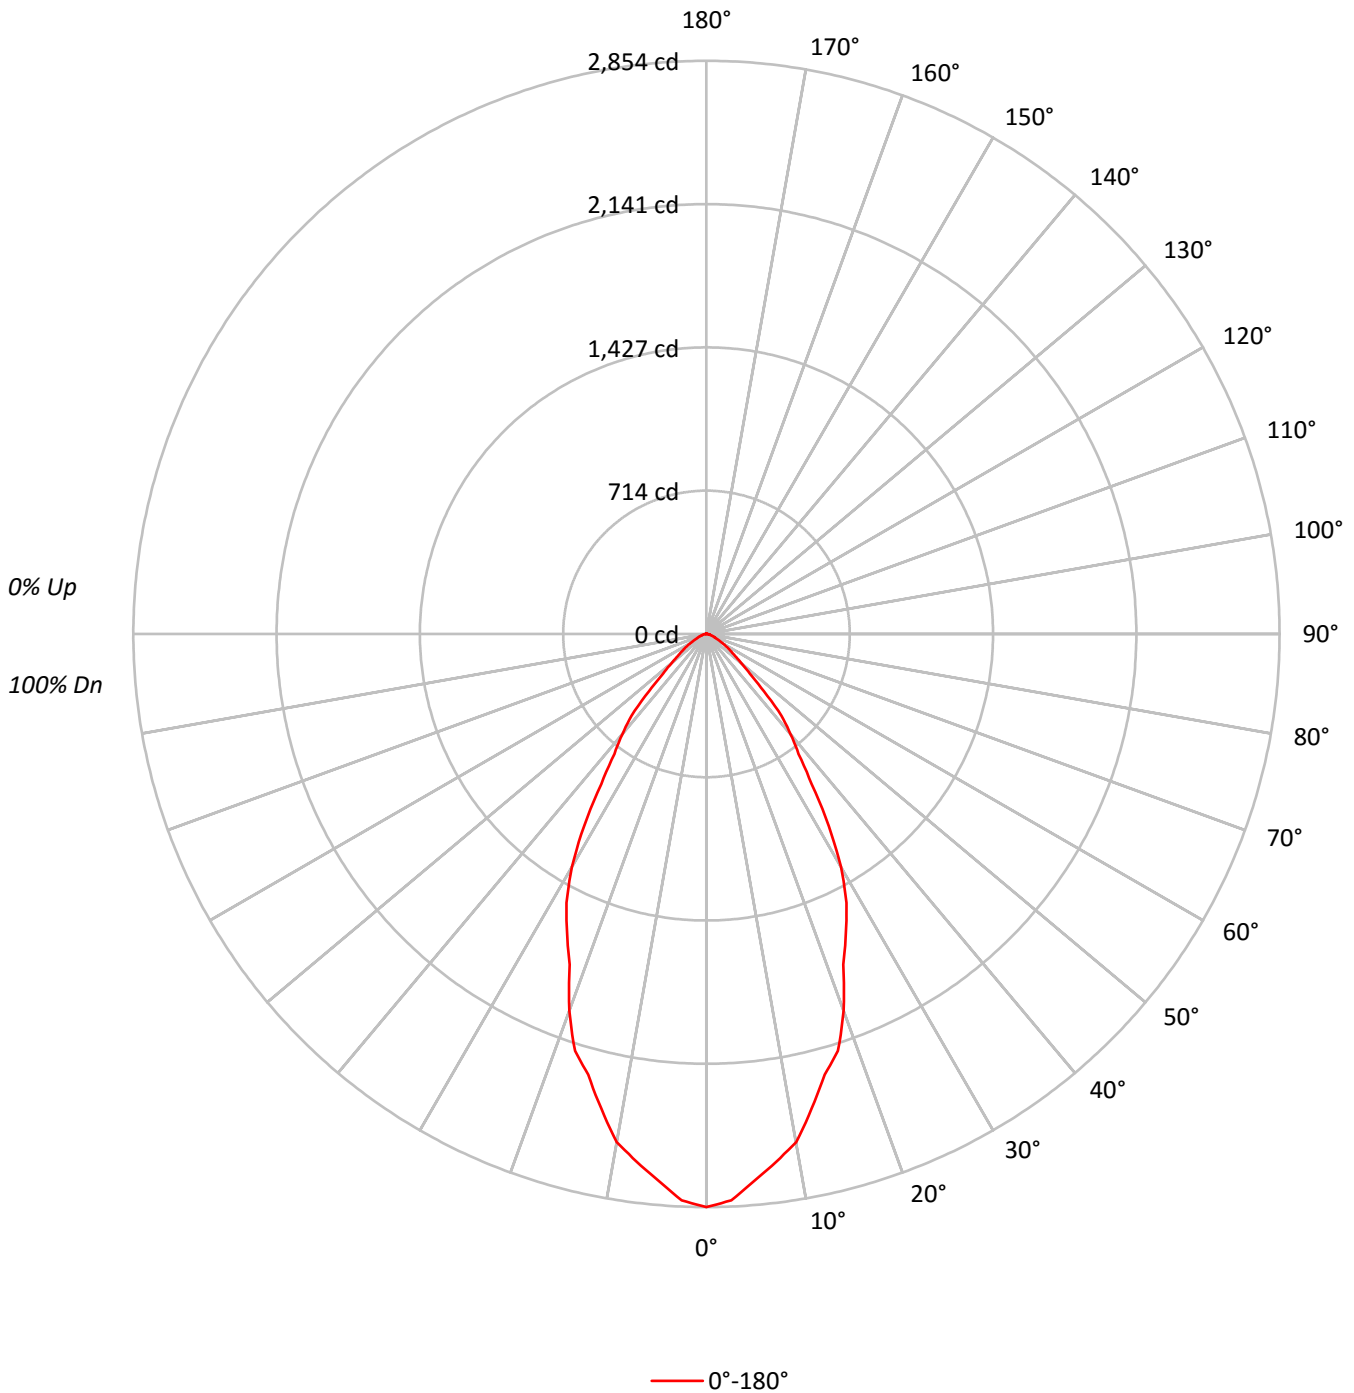



TEST NUMBER: P229320

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9030-6LBW1LI-GCC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96	95	93	92
2	106	101	96	92	104	99	95	91	95	92	89		92	90	87		90	87	85	83
3	100	93	87	83	98	91	86	82	88	84	81		86	82	79		84	81	78	76
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78	74	71	70
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69	64	61	59
7	79	69	62	58	78	68	62	57	67	61	57		66	60	57		64	60	56	55
8	75	64	58	53	74	64	58	53	63	57	53		62	56	53		61	56	52	51
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57	52	49	48
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54	49	46	44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	186190
5°	178990
10°	170268
15°	153483
20°	138661
25°	118286
30°	100939
35°	72707
40°	55502
45°	37321
50°	23090
55°	16618
60°	12096
65°	8243
70°	6962
75°	5672
80°	5260
85°	4192



TEST NUMBER: P229320

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9030-6LBW1LI-GCC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	256.0	9.2
10°-20°	641.0	23.0
20°-30°	755.6	27.1
30°-40°	587.4	21.1
40°-50°	322.2	11.6
50°-60°	134.4	4.8
60°-70°	56.8	2.0
70°-80°	24.4	0.9
80°-90°	6.9	0.2
90°-100°	3.1	0.1
100°-110°	1.9	0.1
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1652.5	59.2
0°-40°	2239.9	80.3
0°-60°	2696.5	96.7
0°-90°	2784.6	99.8
90°-120°	4.9	0.2
90°-150°	4.9	0.2
90°-180°	5.0	0.2
0°-180°	2789.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2854	
5°	2733	256
15°	2272	641
25°	1643	756
35°	913	587
45°	404	322
55°	146	134
65°	53	57
75°	22	24
85°	6	6
90°	3	2
95°	3	2
105°	3	2
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229320

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9030-6LBW1LI-GCC

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2853.9
2.5°	2823.0
5°	2733.1
7.5°	2651.6
10°	2570.2
12.5°	2421.3
15°	2272.4
17.5°	2176.9
20°	1997.2
22.5°	1780.9
25°	1643.2
27.5°	1508.4
30°	1339.9
32.5°	1134.8
35°	912.9
37.5°	752.8
40°	651.7
42.5°	553.4
45°	404.5
47.5°	292.1
50°	227.5
52.5°	179.8
55°	146.1
57.5°	118.0
60°	92.7
62.5°	67.4
65°	53.4
67.5°	44.9
70°	36.5
72.5°	28.1
75°	22.5
77.5°	16.9
80°	14.0
82.5°	8.4
85°	5.6
87.5°	2.8
90°	2.8
92.5°	2.8
95°	2.8
97.5°	2.8
100°	2.8
102.5°	2.8
105°	2.8
107.5°	0.0
110°	0.0



TEST NUMBER: P229320

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9030-6LBW1LI-GCC

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)