

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229291

Luminaire Tested: **340-6B-40-D010 / 340-EU6B-3040-9030-6LBW1LI-GFC**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229291
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-15)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-40-D010 / 340-EU6B-3040-9030-6LBW1LI-GFC
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, FROSTED INSIDE, CLEAR OUTSIDE GLASS KIT.
Light Source: (1) 3000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2470.1 lumens
Efficiency: N/A
Efficacy: 59.1 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.74
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229291

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9030-6LBW1LI-GFC

Luminous Intensity Polar Plot

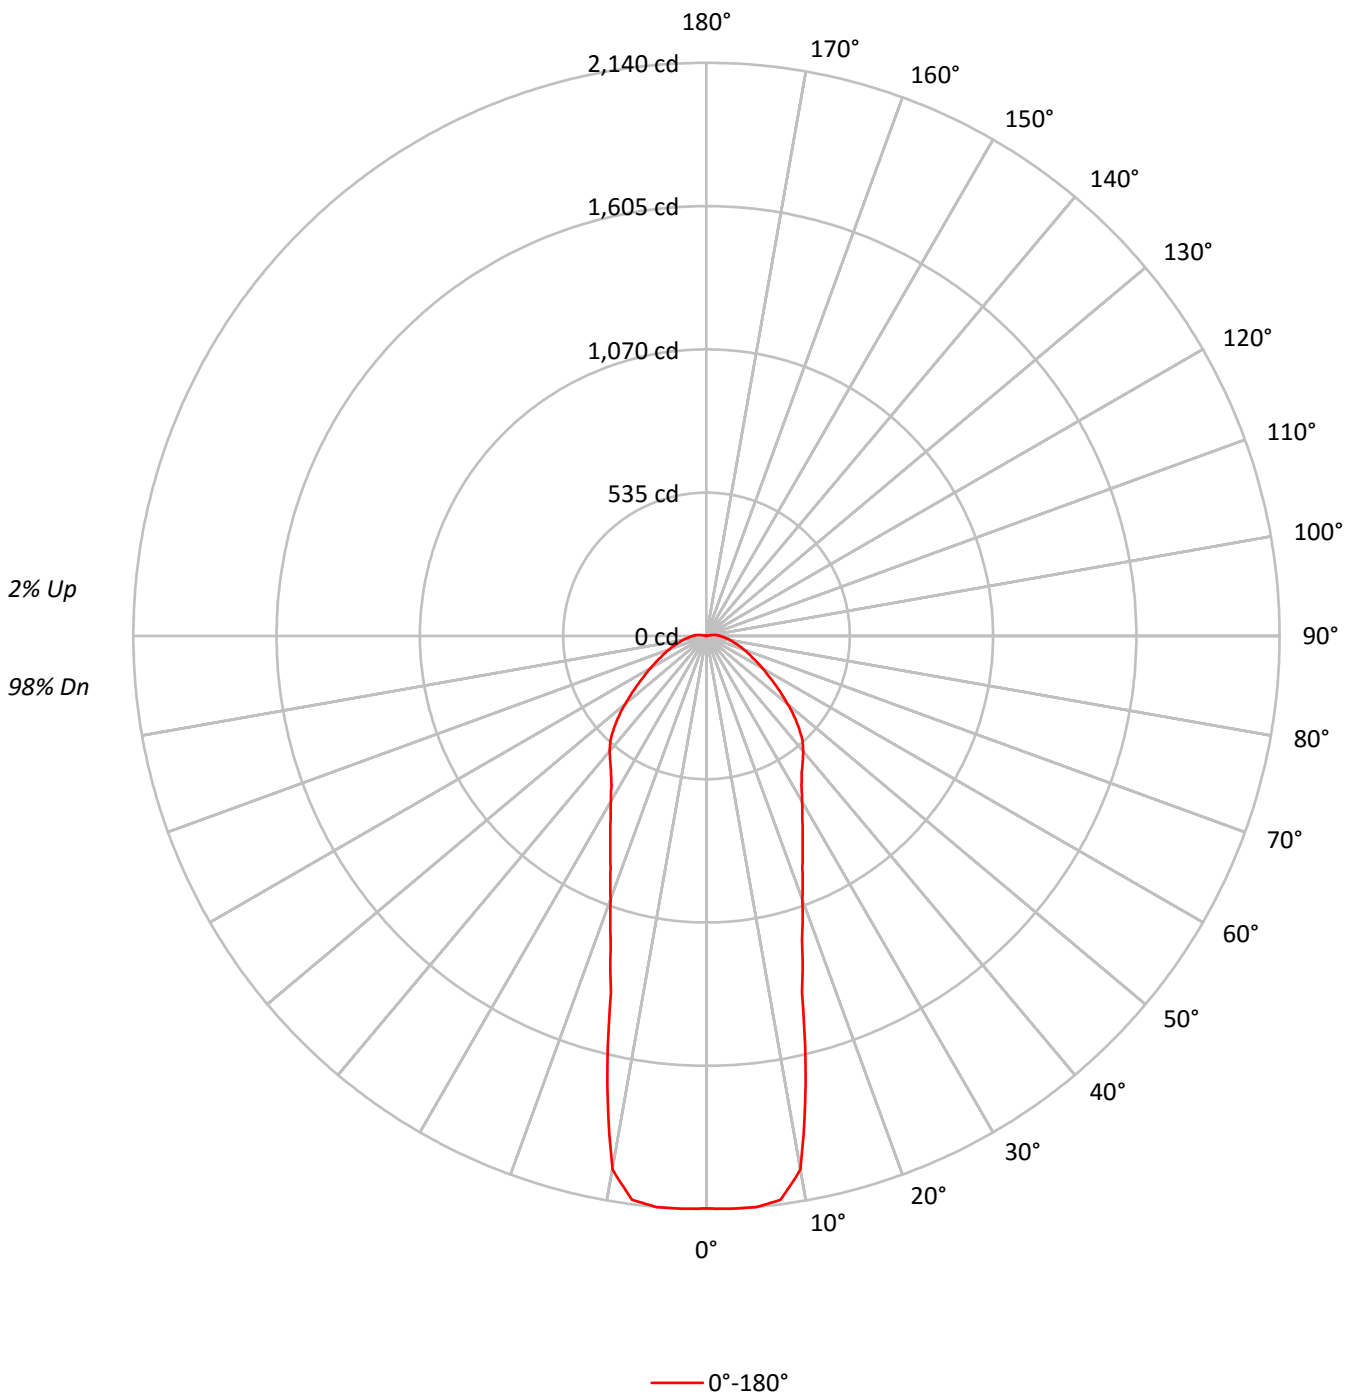



TEST NUMBER: P229291

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9030-6LBW1LI-GFC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	110	110	110		105	105	105		100	100	100	98
1	109	105	101	97	106	102	99	96	98	95	92		94	91	89		90	88	86	84
2	101	93	87	82	98	91	86	81	88	83	79		84	80	77		81	78	75	73
3	93	84	76	71	91	82	75	70	79	73	69		76	71	67		73	69	66	64
4	86	76	68	62	84	74	67	61	72	65	60		69	64	60		67	62	59	57
5	81	69	61	55	78	68	60	55	66	59	54		64	58	53		62	57	53	51
6	75	63	55	50	73	62	55	49	60	54	49		59	53	48		57	52	48	46
7	71	58	51	45	69	58	50	45	56	49	44		54	49	44		53	48	44	42
8	66	54	47	41	65	54	46	41	52	46	41		51	45	41		50	44	40	38
9	63	51	43	38	61	50	43	38	49	42	38		48	42	37		47	41	37	36
10	59	47	40	35	58	47	40	35	46	39	35		45	39	35		44	38	35	33

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	139458
5°	125269
10°	108063
15°	68135
20°	48654
25°	37367
30°	30108
35°	25325
40°	22345
45°	19109
50°	15340
55°	11945
60°	9394
65°	7418
70°	5996
75°	4779
80°	3876
85°	3049



TEST NUMBER: P229291

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9030-6LBW1LI-GFC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	201.2	8.1
10°-20°	397.3	16.1
20°-30°	393.6	15.9
30°-40°	392.1	15.9
40°-50°	374.3	15.2
50°-60°	279.4	11.3
60°-70°	189.4	7.7
70°-80°	123.5	5.0
80°-90°	75.1	3.0
90°-100°	39.1	1.6
100°-110°	5.3	0.2
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	992.1	40.2
0°-40°	1384.2	56.0
0°-60°	2037.9	82.5
0°-90°	2425.8	98.2
90°-120°	44.4	1.8
90°-150°	44.4	1.8
90°-180°	44.0	1.8
0°-180°	2470.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2138	
5°	2140	201
15°	1376	397
25°	848	394
35°	621	392
45°	489	374
55°	309	279
65°	188	189
75°	115	123
85°	67	60
90°	51	28
95°	36	26
105°	3	5
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229291

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9030-6LBW1LI-GFC

CANDELA DISTRIBUTION (FULL):

0°	
0°	2137.6
2.5°	2140.4
5°	2140.4
7.5°	2123.6
10°	2022.4
12.5°	1710.6
15°	1376.4
17.5°	1188.2
20°	1047.7
22.5°	935.4
25°	848.3
27.5°	775.3
30°	713.5
32.5°	660.1
35°	620.8
37.5°	589.9
40°	561.8
42.5°	530.9
45°	488.8
47.5°	443.8
50°	396.1
52.5°	351.1
55°	309.0
57.5°	272.5
60°	241.6
62.5°	213.5
65°	188.2
67.5°	168.5
70°	148.9
72.5°	132.0
75°	115.2
77.5°	101.1
80°	89.9
82.5°	78.7
85°	67.4
87.5°	59.0
90°	50.6
92.5°	44.9
95°	36.5
97.5°	28.1
100°	16.9
102.5°	8.4
105°	2.8
107.5°	0.0
110°	0.0



TEST NUMBER: P229291

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9030-6LBW1LI-GFC

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)