

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229234

Luminaire Tested: **340-6B-40-D010 / 340-EU6B-3040-9035-6LBW1LI-CQ**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229234
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-13)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-40-D010 / 340-EU6B-3040-9035-6LBW1LI-CQ
Description: FARALLON 6" LED GLASS DOWNLIGHT CYLINDRICAL FROSTED, QUADRATE ETCHED GLASS KIT.
Light Source: (1) 3500K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2440.5 lumens
Efficiency: N/A
Efficacy: 58.4 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.54
Luminous Opening: Vertical Cylinder (Dia: 0.46' x H: 0.49')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229234

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9035-6LBW1LI-CQ

Luminous Intensity Polar Plot

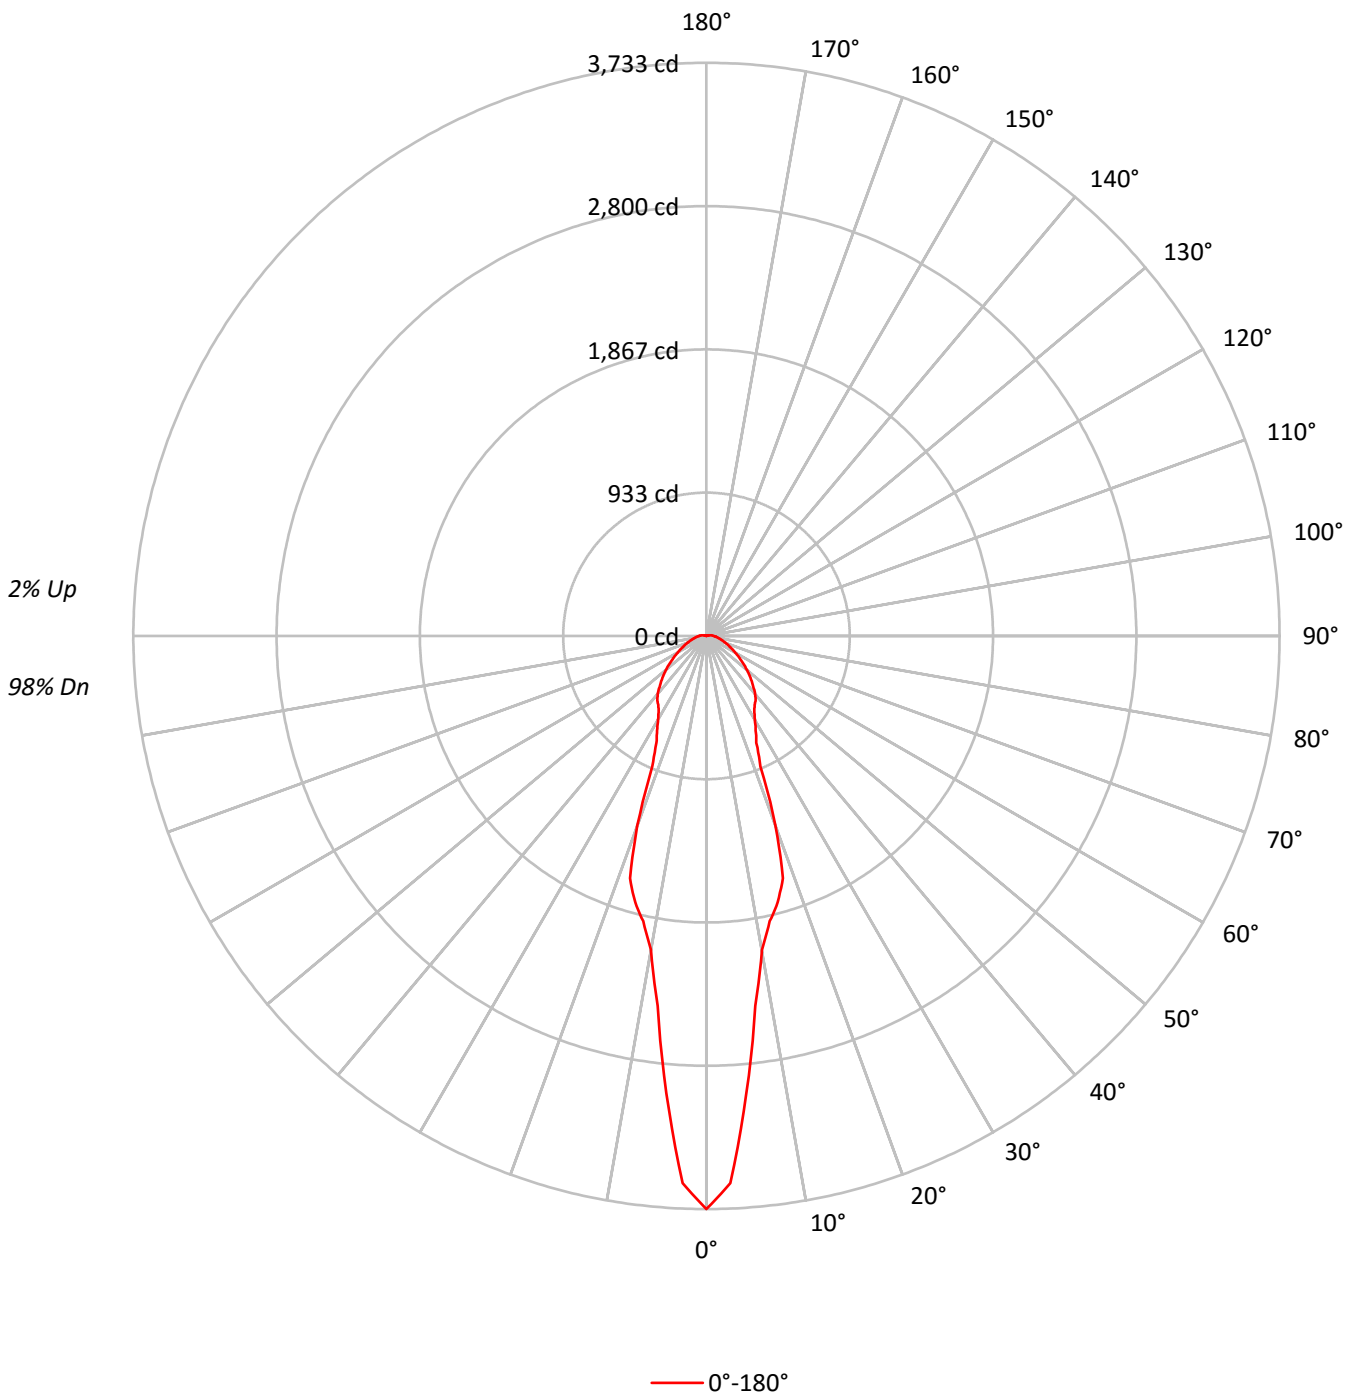



TEST NUMBER: P229234

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9035-6LBW1LI-CQ

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	110	105	102	98	107	103	100	97	98	96	93	94	92	90	90	89	87	85
2	102	95	89	84	99	93	87	83	89	84	81	85	82	78	82	79	76	74
3	95	86	79	73	92	84	78	72	81	75	71	78	73	70	75	71	68	66
4	88	78	71	65	86	77	70	64	74	68	63	72	67	62	69	65	61	59
5	83	72	64	58	81	71	63	58	68	62	57	66	61	57	64	60	56	54
6	78	66	59	53	76	65	58	53	63	57	52	62	56	52	60	55	51	49
7	73	62	54	49	71	61	54	49	59	53	48	58	52	48	56	51	47	46
8	69	58	50	45	68	57	50	45	55	49	45	54	48	44	53	48	44	42
9	66	54	47	42	64	53	47	42	52	46	42	51	45	41	50	45	41	40
10	62	51	44	40	61	50	44	39	49	43	39	48	43	39	47	42	39	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	243517
5°	174928
10°	110986
15°	88861
20°	61133
25°	33887
30°	26572
35°	22319
40°	19605
45°	16263
50°	13353
55°	10573
60°	8418
65°	6626
70°	5279
75°	4257
80°	3441
85°	2837



TEST NUMBER: P229234

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9035-6LBW1LI-CQ

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	255.5	10.5
10°-20°	490.2	20.1
20°-30°	380.5	15.6
30°-40°	346.2	14.2
40°-50°	321.2	13.2
50°-60°	247.2	10.1
60°-70°	169.2	6.9
70°-80°	109.8	4.5
80°-90°	68.3	2.8
90°-100°	39.6	1.6
100°-110°	12.5	0.5
110°-120°	0.4	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1126.2	46.1
0°-40°	1472.4	60.3
0°-60°	2040.7	83.6
0°-90°	2388.0	97.8
90°-120°	52.5	2.2
90°-150°	52.5	2.2
90°-180°	53.0	2.2
0°-180°	2440.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3733	
5°	2989	255
15°	1795	490
25°	769	381
35°	547	346
45°	416	321
55°	274	247
65°	168	169
75°	103	110
85°	63	55
90°	46	26
95°	37	28
105°	11	13
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229234

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9035-6LBW1LI-CQ

CANDELA DISTRIBUTION (FULL):

0°	
0°	3732.6
2.5°	3567.3
5°	2988.9
7.5°	2430.5
10°	2077.1
12.5°	1903.3
15°	1795.1
17.5°	1655.4
20°	1316.4
22.5°	920.3
25°	769.3
27.5°	695.2
30°	629.7
32.5°	578.4
35°	547.1
37.5°	527.1
40°	492.9
42.5°	453.0
45°	416.0
47.5°	379.0
50°	344.8
52.5°	307.7
55°	273.5
57.5°	245.0
60°	216.5
62.5°	190.9
65°	168.1
67.5°	151.0
70°	131.1
72.5°	116.8
75°	102.6
77.5°	91.2
80°	79.8
82.5°	71.2
85°	62.7
87.5°	54.1
90°	45.6
92.5°	42.7
95°	37.0
97.5°	31.3
100°	22.8
102.5°	17.1
105°	11.4
107.5°	5.7
110°	2.8



TEST NUMBER: P229234

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9035-6LBW1LI-CQ

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)