

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: SHAPER

Report Number: P229322

Luminaire Tested: **340-6B-40-D010 / 340-EU6B-3040-9040-6LBW1LI-GCC**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P229322
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-16)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: SHAPER
Catalog Number: 340-6B-40-D010 / 340-EU6B-3040-9040-6LBW1LI-GCC
Description: FARALLON 6" LED GLASS DOWNLIGHT. GLASS-IN-A-GLASS, CLEAR INSIDE,
CLEAR OUTSIDE GLASS KIT.
Light Source: (1) 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2834.0 lumens
Efficiency: N/A
Efficacy: 67.8 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.89
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P229322

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9040-6LBW1LI-GCC

Luminous Intensity Polar Plot

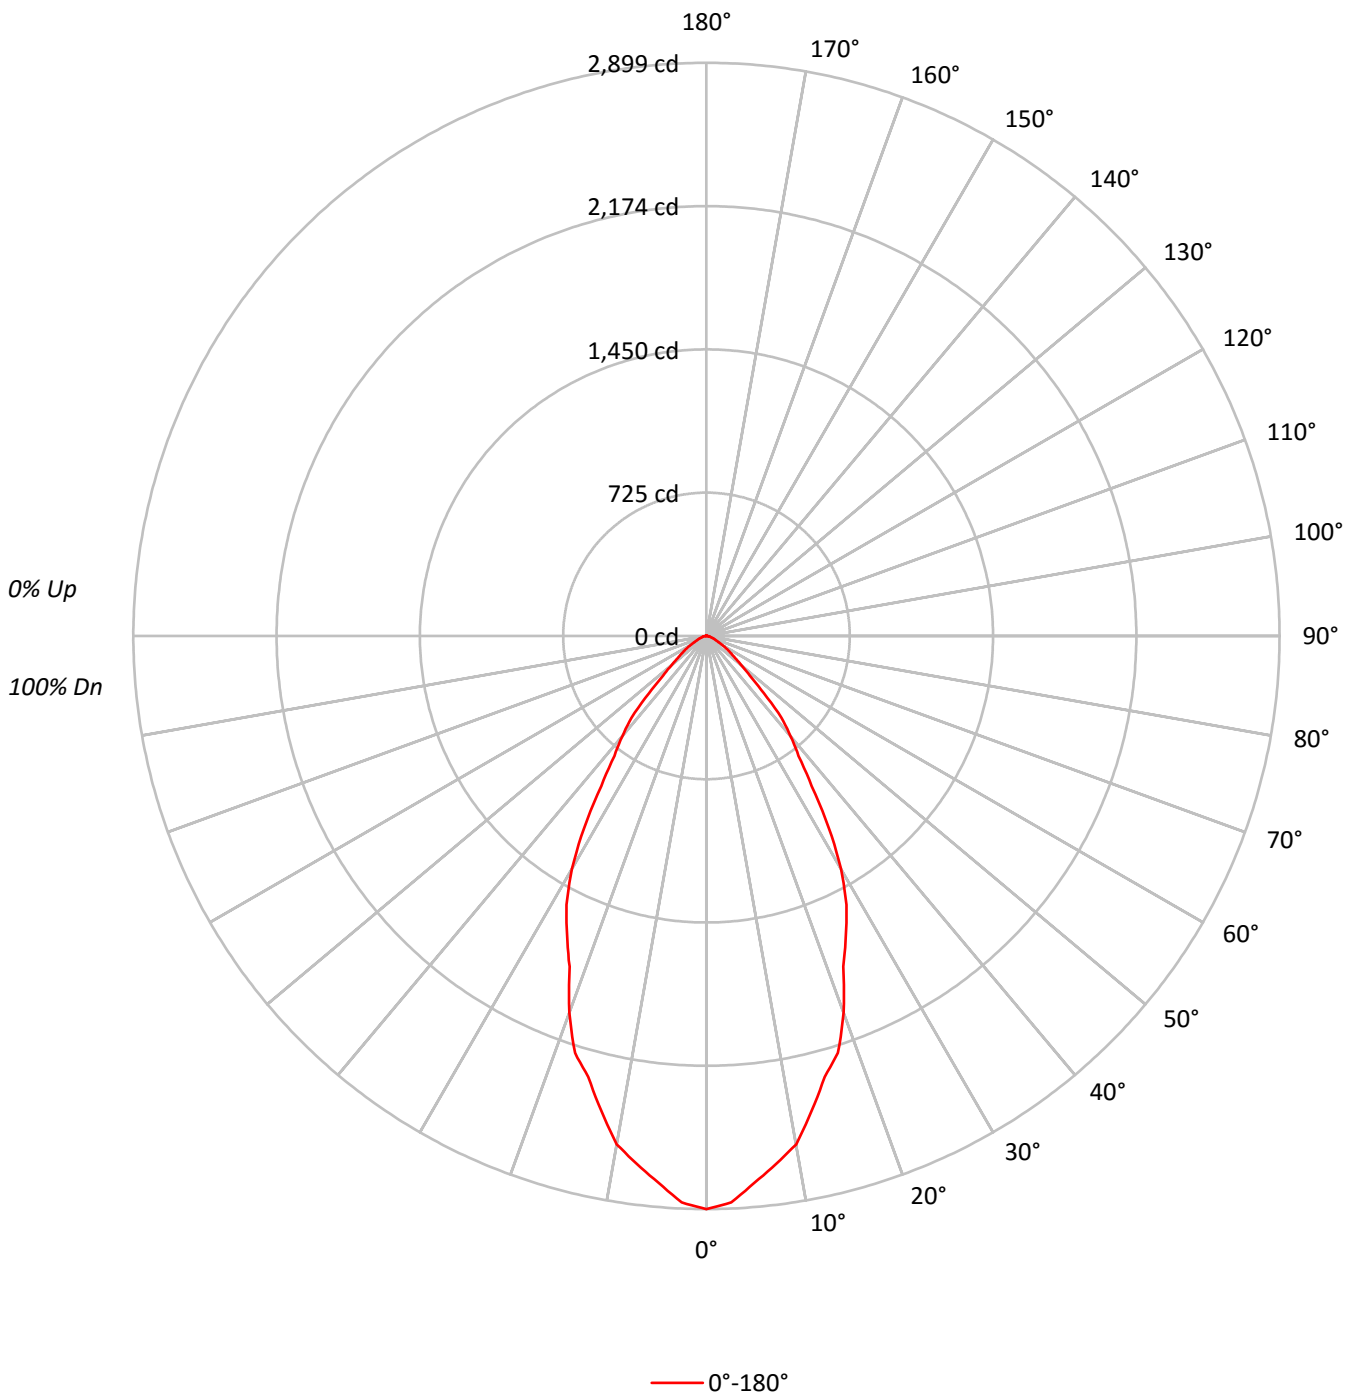



TEST NUMBER: P229322

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9040-6LBW1LI-GCC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83
3	100	93	87	83	98	91	86	82	88	84	81	86	82	79	84	81	78	76
4	94	86	79	75	92	84	79	74	82	77	73	80	76	72	78	74	71	70
5	89	79	73	68	87	78	72	68	76	71	67	75	70	66	73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59
7	79	69	62	58	78	68	62	57	67	61	57	66	60	57	64	60	56	55
8	75	64	58	53	74	64	58	53	63	57	53	62	56	53	61	56	52	51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48
10	67	57	51	46	66	56	50	46	56	50	46	55	50	46	54	49	46	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	189152
5°	181839
10°	172978
15°	155928
20°	140862
25°	120172
30°	102544
35°	73862
40°	56380
45°	37911
50°	23456
55°	16880
60°	12291
65°	8367
70°	7077
75°	5747
80°	5373
85°	4267



TEST NUMBER: P229322

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9040-6LBW1LI-GCC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	260.1	9.2
10°-20°	651.2	23.0
20°-30°	767.6	27.1
30°-40°	596.7	21.1
40°-50°	327.3	11.6
50°-60°	136.5	4.8
60°-70°	57.7	2.0
70°-80°	24.8	0.9
80°-90°	7.0	0.2
90°-100°	3.2	0.1
100°-110°	1.9	0.1
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1678.8	59.2
0°-40°	2275.6	80.3
0°-60°	2739.4	96.7
0°-90°	2828.9	99.8
90°-120°	5.1	0.2
90°-150°	5.1	0.2
90°-180°	5.0	0.2
0°-180°	2834.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2899	
5°	2777	260
15°	2309	651
25°	1669	768
35°	927	597
45°	411	327
55°	148	136
65°	54	58
75°	23	25
85°	6	6
90°	3	2
95°	3	2
105°	3	2
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229322

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9040-6LBW1LI-GCC

CANDELA DISTRIBUTION (FULL):

0°	
0°	2899.3
2.5°	2867.9
5°	2776.6
7.5°	2693.8
10°	2611.1
12.5°	2459.8
15°	2308.6
17.5°	2211.6
20°	2028.9
22.5°	1809.2
25°	1669.4
27.5°	1532.4
30°	1361.2
32.5°	1152.9
35°	927.4
37.5°	764.8
40°	662.0
42.5°	562.2
45°	410.9
47.5°	296.8
50°	231.1
52.5°	182.6
55°	148.4
57.5°	119.9
60°	94.2
62.5°	68.5
65°	54.2
67.5°	45.7
70°	37.1
72.5°	28.5
75°	22.8
77.5°	17.1
80°	14.3
82.5°	8.6
85°	5.7
87.5°	2.9
90°	2.9
92.5°	2.9
95°	2.9
97.5°	2.9
100°	2.9
102.5°	2.9
105°	2.9
107.5°	0.0
110°	0.0



TEST NUMBER: P229322

CATALOG NUMBER: 340-6B-40-D010 / 340-EU6B-3040-9040-6LBW1LI-GCC

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)