

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P256608

Luminaire Tested: **CST-6-3-D-U-T5R-7050**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P256608
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1808-894-1)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: CST-6-3-D-U-T5R-7050
Description: CELESTEON HIGH MAST LUMINAIRE
(6) 70 CRI, 5000K LEDS AND TYPE V ROUND OPTICS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 33931 lumens
Efficiency: N/A
Efficacy: 145.0 lumens/watt
Luminous Opening: Circular (Dia: 2.08' x H: 0')
IES Classification: Type V - Short - Full Cutoff
BUG Rating: B5 - U0 - G4

Input Watts (W): 234
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT




REPORT NUMBER: P256608

CATALOG NUMBER: CST-6-3-D-U-T5R-7050

Iso-Footcandle Lines of Horizontal Illumination

✕ Max cd
 - - - 1/2 Max cd

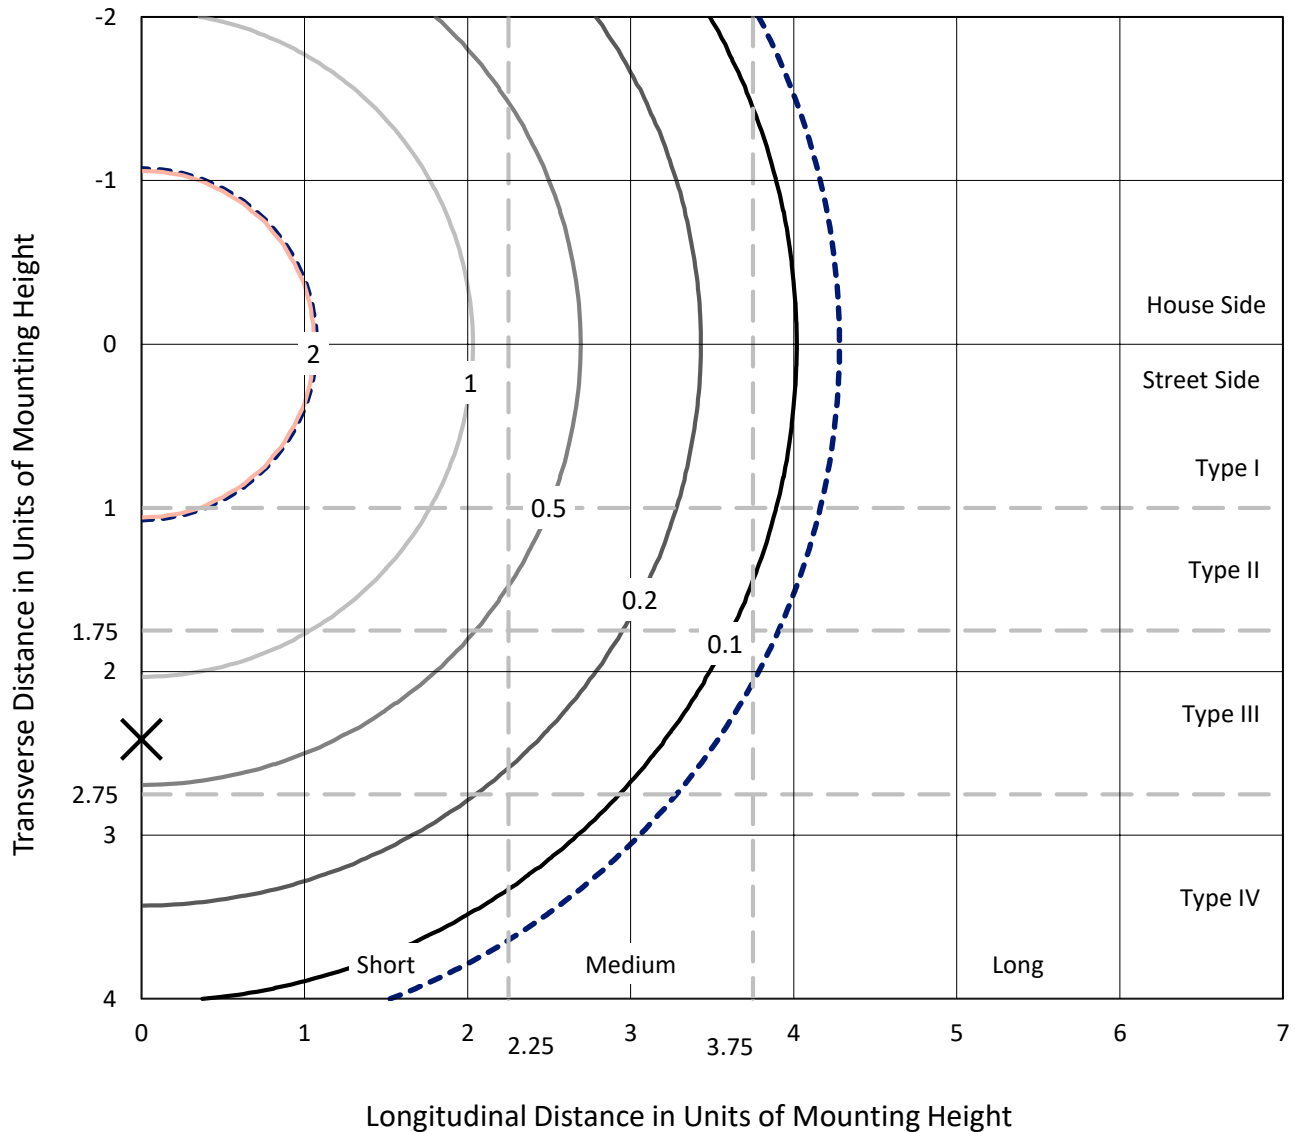


Based on 30 foot mounting height. Maximum calculated value = 2.5 fc
 Type V - Short - Full Cutoff

REPORT NUMBER: P256608

CATALOG NUMBER: CST-6-3-D-U-T5R-7050

Luminous Intensity Polar Plot

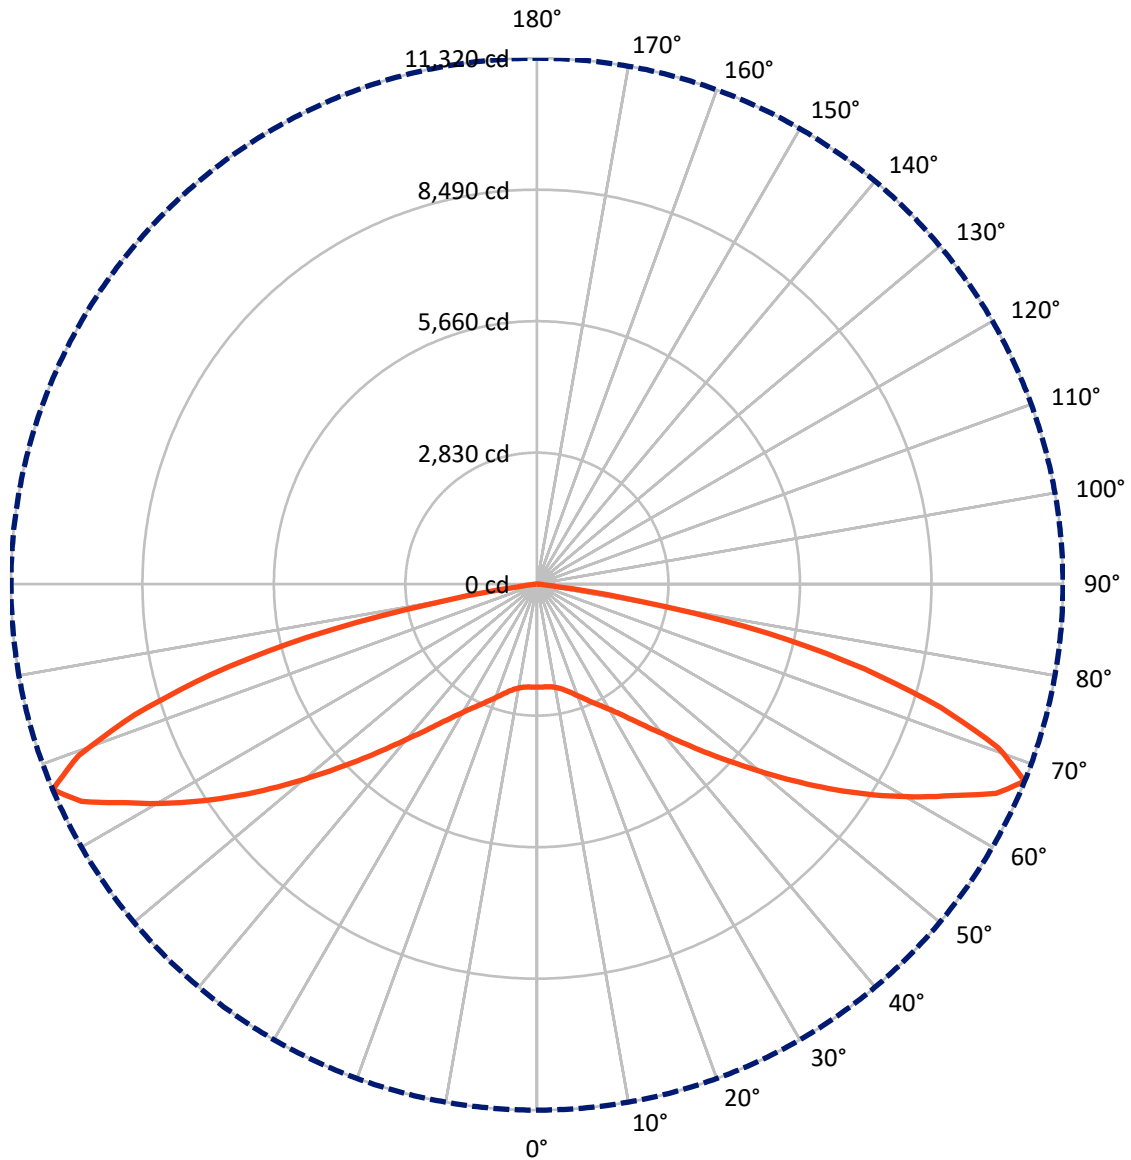

— Vertical Plane Through 0-Deg Lateral - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P256608

CATALOG NUMBER: CST-6-3-D-U-T5R-7050


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	16965.5	0.0	16965.5
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	16965.5	0.0	16965.5
	% Fixture	50.0	0.0	50.0
Total	Lumens	33931.0	0.0	33931.0
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	213.0	0.6
10°-20°	682.8	2.0
20°-30°	1320.8	3.9
30°-40°	2304.1	6.8
40°-50°	4089.9	12.1
50°-60°	7044.1	20.8
60°-70°	10461.4	30.8
70°-80°	7341.3	21.6
80°-90°	473.6	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	33931.0	100.0
0°-180°	33931.0	100.0

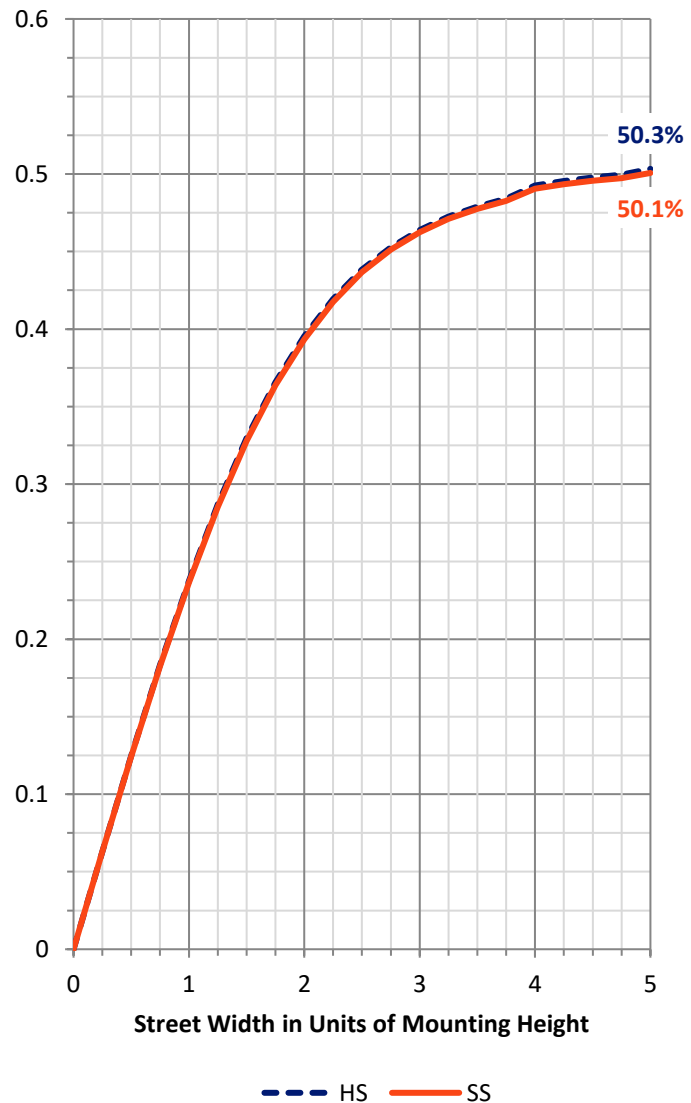

REPORT NUMBER: P256608


CATALOG NUMBER: CST-6-3-D-U-T5R-7050

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	1108.3	3.3			
FM	(30°-60°)	6719.0	19.8			
FH	(60°-80°)	8901.4	26.2			G4/12000
FVH	(80°-90°)	236.8	0.7			G3/500
BL	(0°-30°)	1108.3	3.3	B3/2500		
BM	(30°-60°)	6719.0	19.8	B4/8500		
BH	(60°-80°)	8901.4	26.2	B5		G4/12000
BVH	(80°-90°)	236.8	0.7			G3/500
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G4

Type V Short

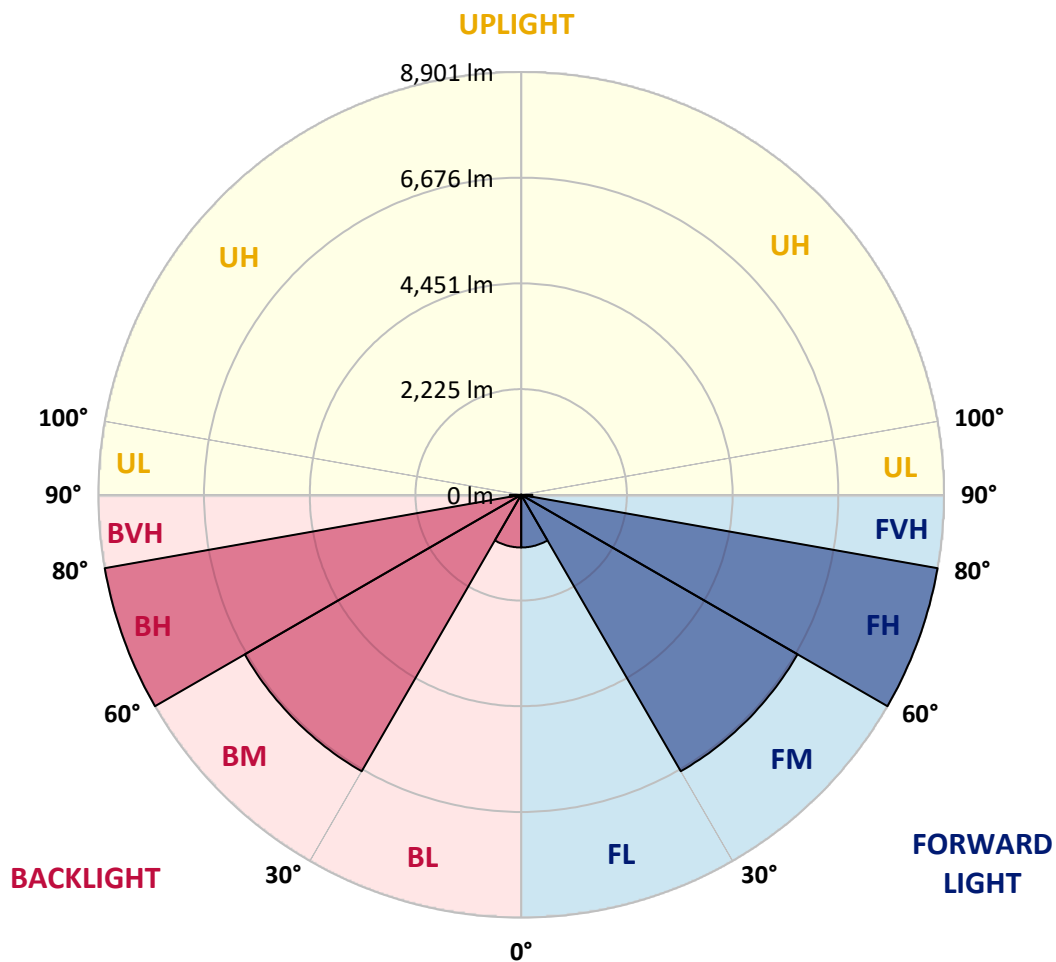



REPORT NUMBER: P256608

CATALOG NUMBER: CST-6-3-D-U-T5R-7050

CANDELA DISTRIBUTION (FULL):

	0°
0°	2213.3
2.5°	2216.3
5°	2218.3
7.5°	2230.4
10°	2260.8
12.5°	2308.2
15°	2376.9
17.5°	2467.8
20°	2573.9
22.5°	2693.1
25°	2825.4
27.5°	2971.9
30°	3141.6
32.5°	3349.7
35°	3608.3
37.5°	3918.4
40°	4271.0
42.5°	4703.3
45°	5207.4
47.5°	5766.0
50°	6392.3
52.5°	7084.3
55°	7811.6
57.5°	8555.1
60°	9295.5
62.5°	10020.8
65°	10857.3
67.5°	11319.9
70°	10530.0
72.5°	9093.5
75°	7281.3
77.5°	5091.2
80°	2290.0
82.5°	417.2
85°	127.3
87.5°	55.6
90°	0.0

(END OF REPORT)