

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: STREETWORKS

Report Number: P256613

Luminaire Tested: **CST-8-6-D-U-T5R-7050**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P256613
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1808-894-1)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: STREETWORKS
Catalog Number: CST-8-6-D-U-T5R-7050
Description: CELESTEON HIGH MAST LUMINAIRE
(8) 70 CRI, 5000K LEDS AND TYPE V ROUND OPTICS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 68188 lumens
Efficiency: N/A
Efficacy: 143.0 lumens/watt
Luminous Opening: Circular (Dia: 2.08' x H: 0')
IES Classification: Type V - Short - Full Cutoff
BUG Rating: B5 - U0 - G5


Input Watts (W): 477
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P256613
 CATALOG NUMBER: CST-8-6-D-U-T5R-7050

Iso-Footcandle Lines of Horizontal Illumination

✕ Max cd
 - - - 1/2 Max cd

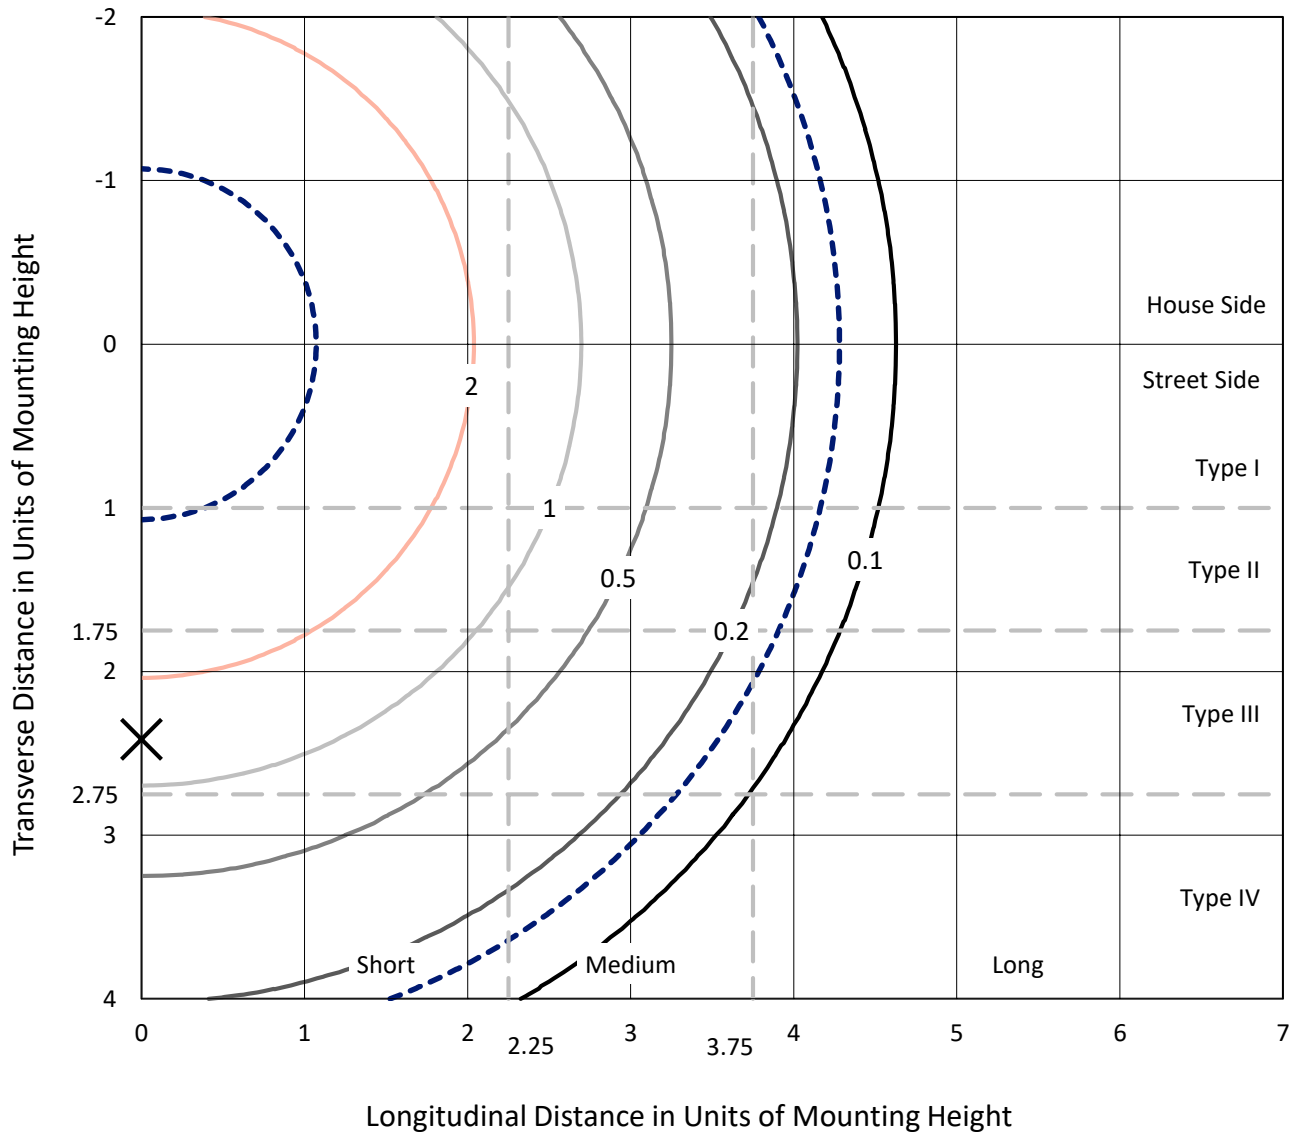


Based on 30 foot mounting height. Maximum calculated value = 4.9 fc
 Type V - Short - Full Cutoff

REPORT NUMBER: P256613

CATALOG NUMBER: CST-8-6-D-U-T5R-7050

Luminous Intensity Polar Plot

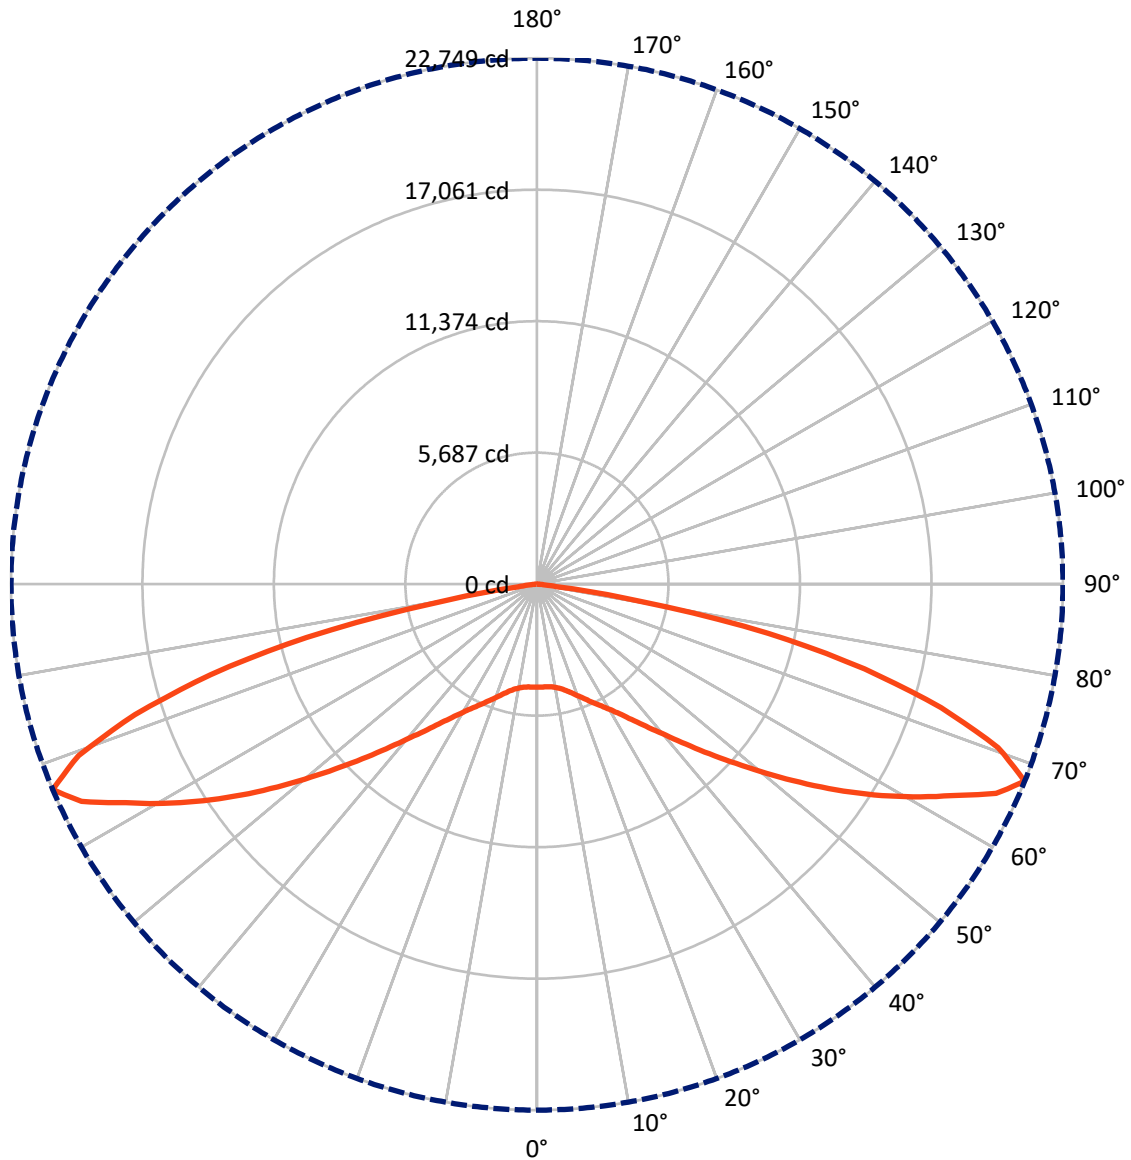

— Vertical Plane Through 0-Deg Lateral - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P256613

CATALOG NUMBER: CST-8-6-D-U-T5R-7050


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	34094.0	0.0	34094.0
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	34094.0	0.0	34094.0
	% Fixture	50.0	0.0	50.0
Total	Lumens	68188.0	0.0	68188.0
	% Fixture	100.0	0.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	428.1	0.6
10°-20°	1372.1	2.0
20°-30°	2654.3	3.9
30°-40°	4630.3	6.8
40°-50°	8219.0	12.1
50°-60°	14156.0	20.8
60°-70°	21023.4	30.8
70°-80°	14753.2	21.6
80°-90°	951.7	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	68188.0	100.0
0°-180°	68188.0	100.0

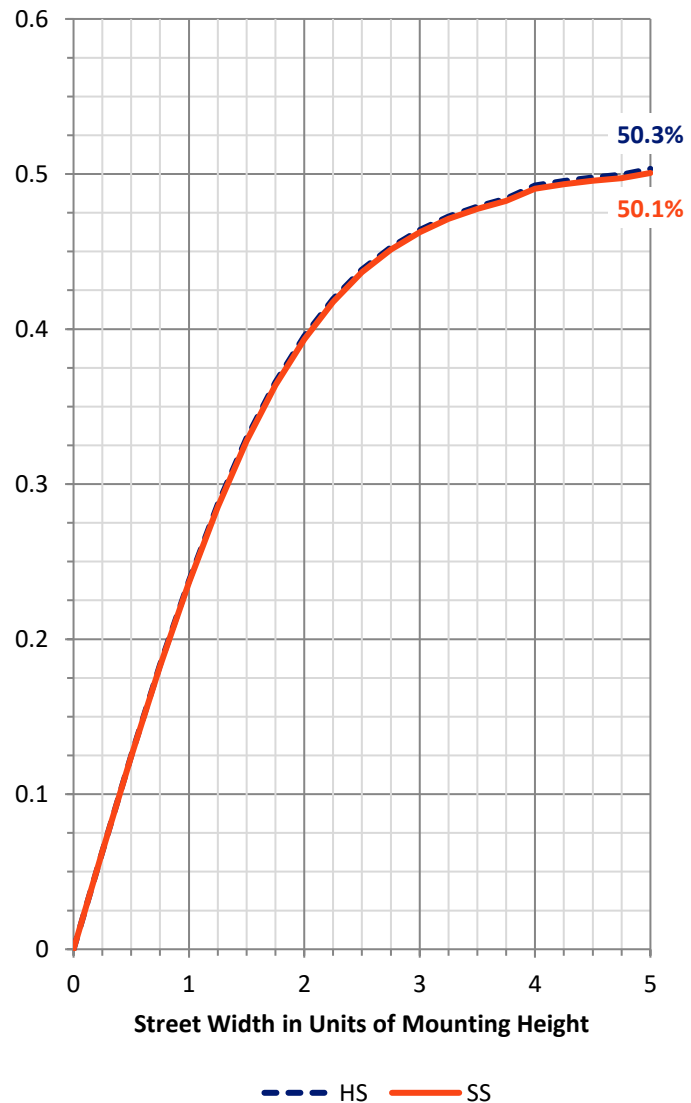

REPORT NUMBER: P256613


CATALOG NUMBER: CST-8-6-D-U-T5R-7050

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	2227.2	3.3			
FM	(30°-60°)	13502.6	19.8			
FH	(60°-80°)	17888.3	26.2			G5
FVH	(80°-90°)	475.8	0.7			G3/500
BL	(0°-30°)	2227.2	3.3	B3/2500		
BM	(30°-60°)	13502.6	19.8	B5		
BH	(60°-80°)	17888.3	26.2	B5		G5
BVH	(80°-90°)	475.8	0.7			G3/500
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B5-U0-G5

Type V Short

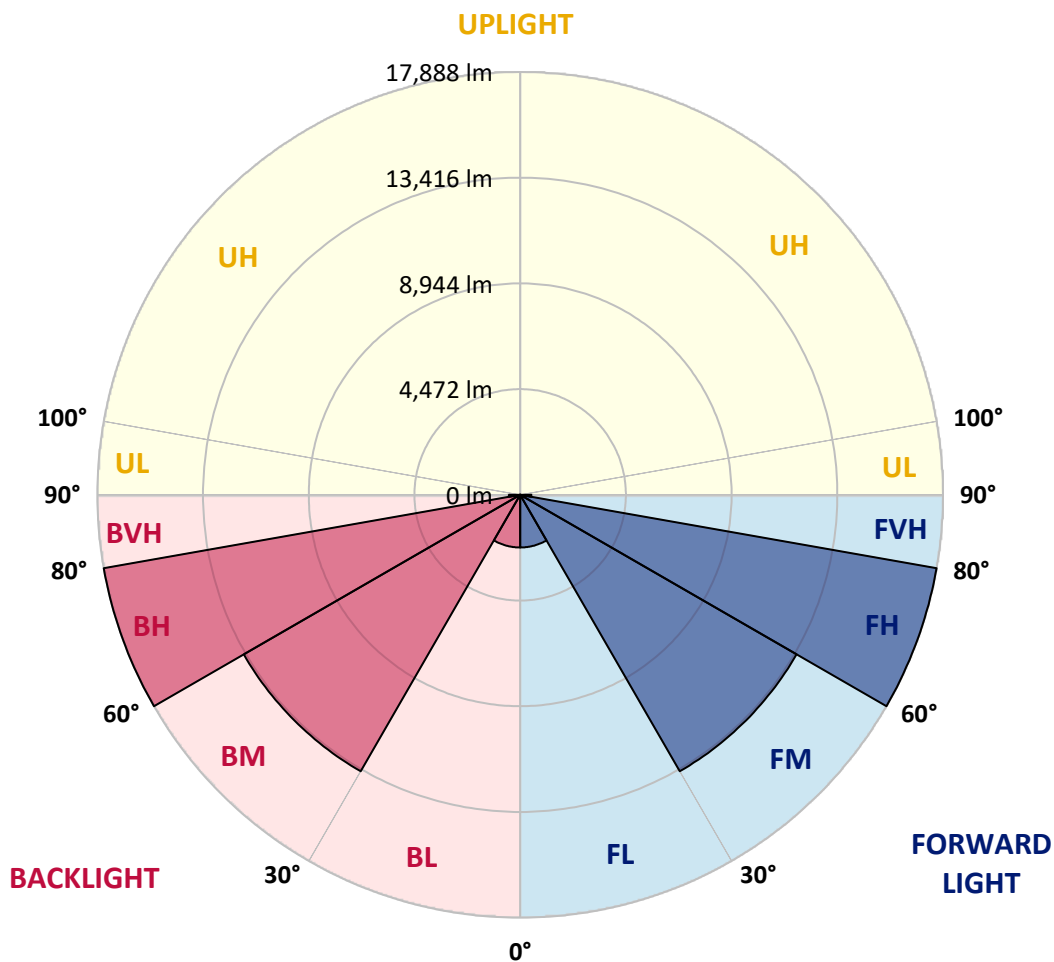



REPORT NUMBER: P256613

CATALOG NUMBER: CST-8-6-D-U-T5R-7050

CANDELA DISTRIBUTION (FULL):

	0°
0°	4447.8
2.5°	4453.9
5°	4458.0
7.5°	4482.3
10°	4543.2
12.5°	4638.6
15°	4776.7
17.5°	4959.4
20°	5172.5
22.5°	5412.1
25°	5678.0
27.5°	5972.4
30°	6313.4
32.5°	6731.6
35°	7251.3
37.5°	7874.5
40°	8583.0
42.5°	9451.9
45°	10464.8
47.5°	11587.4
50°	12846.1
52.5°	14236.6
55°	15698.3
57.5°	17192.4
60°	18680.4
62.5°	20138.0
65°	21818.8
67.5°	22748.6
70°	21161.1
72.5°	18274.4
75°	14632.5
77.5°	10231.4
80°	4602.1
82.5°	838.4
85°	255.8
87.5°	111.7
90°	0.0

(END OF REPORT)