

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P252760

Luminaire Tested: **LD6B10D010 EU6B10209035 6LBBA1MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P252760
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1712-453-2)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B10D010 EU6B10209035 6LBBA1MW
Description: PORTFOLIO 6 INCH BAFFLE RECESSED DOWNLIGHT, WITH MATTE WHITE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1172.0 lumens
Efficiency: N/A
Efficacy: 116.6 lumens/watt
Spacing Criteria (0/90/45): 1.03 / 1.03 / 1
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 10.05
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P252760

CATALOG NUMBER: LD6B10D010 EU6B10209035 6LBBA1MW

Luminous Intensity Polar Plot

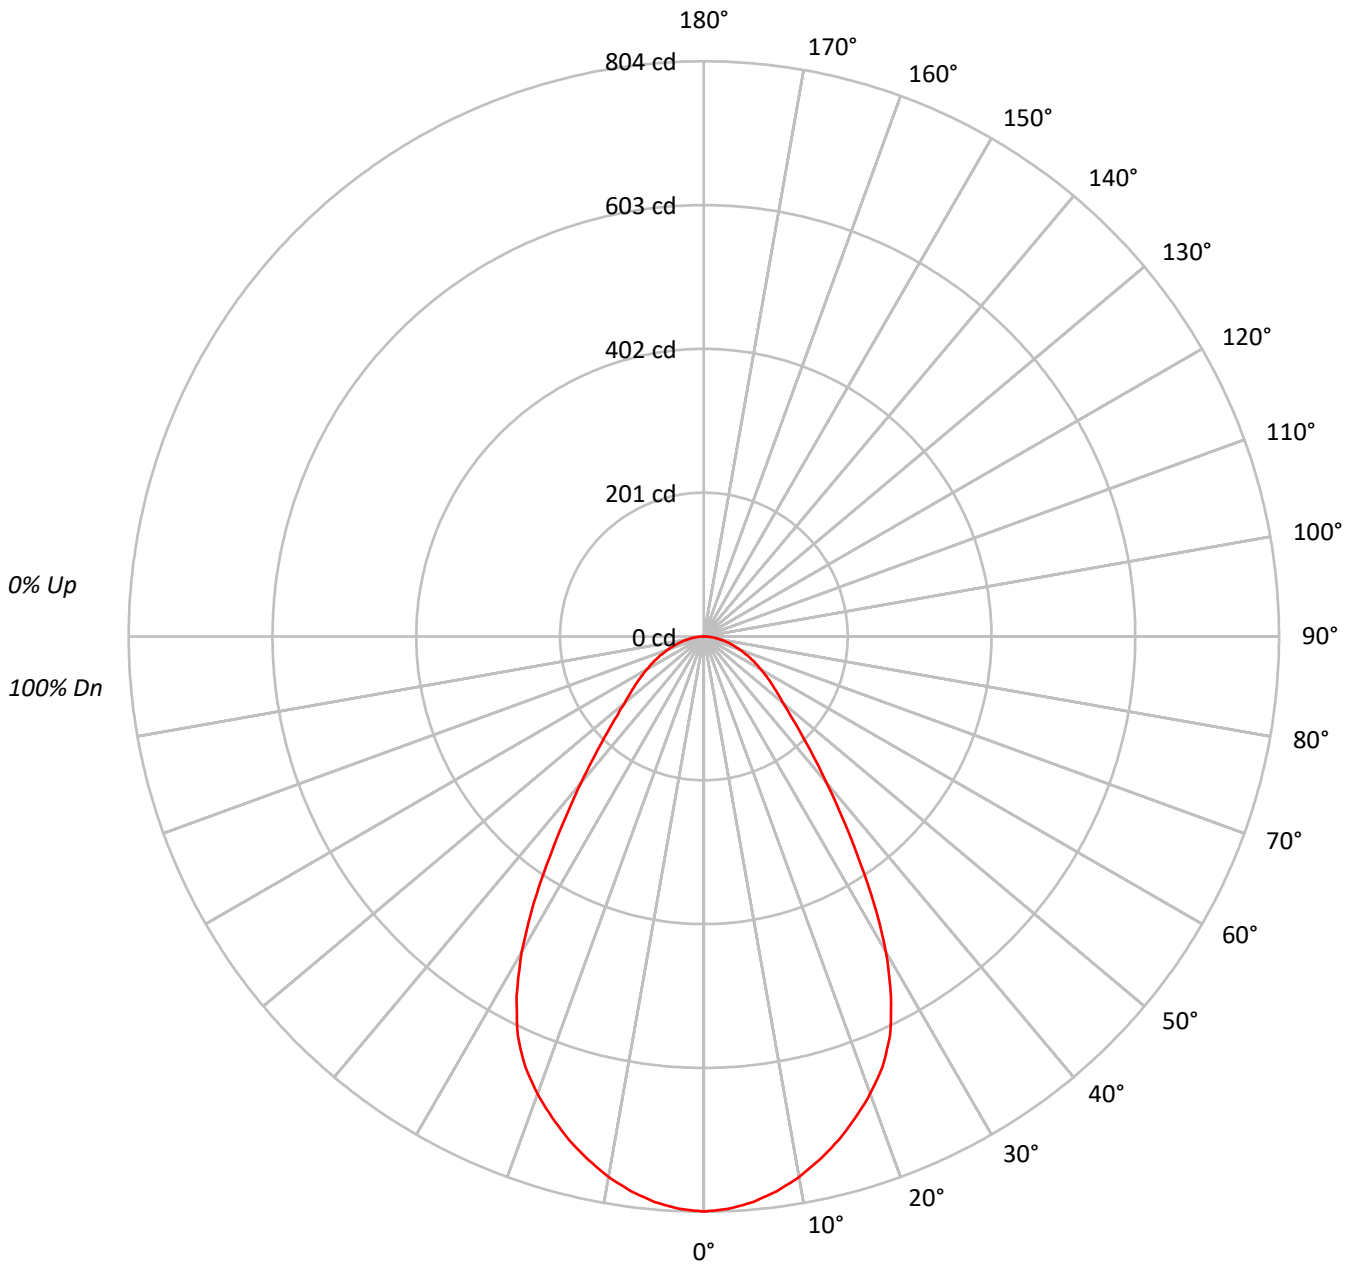



TEST NUMBER: P252760

CATALOG NUMBER: LD6B10D010 EU6B10209035 6LBBA1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | |
| 1 | 111 | 107 | 104 | 101 | 108 | 105 | 102 | 99 | 101 | 98 | 96 | 97 | 95 | 93 | 94 | 92 | 90 | 88 | | | |
| 2 | 103 | 97 | 91 | 87 | 101 | 95 | 90 | 86 | 91 | 87 | 84 | 88 | 85 | 82 | 85 | 83 | 80 | 78 | | | |
| 3 | 96 | 87 | 81 | 76 | 94 | 86 | 80 | 75 | 83 | 78 | 74 | 81 | 76 | 72 | 78 | 74 | 71 | 69 | | | |
| 4 | 90 | 80 | 72 | 67 | 87 | 78 | 72 | 66 | 76 | 70 | 66 | 74 | 69 | 65 | 72 | 68 | 64 | 62 | | | |
| 5 | 84 | 73 | 65 | 60 | 82 | 72 | 65 | 60 | 70 | 64 | 59 | 68 | 63 | 58 | 66 | 62 | 58 | 56 | | | |
| 6 | 78 | 67 | 60 | 54 | 77 | 66 | 59 | 54 | 65 | 58 | 54 | 63 | 57 | 53 | 62 | 57 | 53 | 51 | | | |
| 7 | 74 | 62 | 55 | 49 | 72 | 61 | 54 | 49 | 60 | 53 | 49 | 59 | 53 | 49 | 57 | 52 | 48 | 47 | | | |
| 8 | 69 | 58 | 50 | 45 | 68 | 57 | 50 | 45 | 56 | 49 | 45 | 55 | 49 | 45 | 53 | 48 | 44 | 43 | | | |
| 9 | 65 | 54 | 46 | 42 | 64 | 53 | 46 | 42 | 52 | 46 | 41 | 51 | 45 | 41 | 50 | 45 | 41 | 39 | | | |
| 10 | 62 | 50 | 43 | 39 | 61 | 50 | 43 | 39 | 49 | 43 | 38 | 48 | 42 | 38 | 47 | 42 | 38 | 37 | | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|-------|
| | 0° |
| 0° | 52447 |
| 5° | 51960 |
| 10° | 50818 |
| 15° | 49204 |
| 20° | 47218 |
| 25° | 44328 |
| 30° | 38352 |
| 35° | 29867 |
| 40° | 22697 |
| 45° | 17696 |
| 50° | 14676 |
| 55° | 13172 |
| 60° | 11991 |
| 65° | 11069 |
| 70° | 10167 |
| 75° | 9427 |
| 80° | 8529 |
| 85° | 7785 |



TEST NUMBER: P252760

CATALOG NUMBER: LD6B10D010 EU6B10209035 6LBBA1MW

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 74.9 | 6.4 |
| 10°-20° | 204.7 | 17.5 |
| 20°-30° | 278.8 | 23.8 |
| 30°-40° | 235.9 | 20.1 |
| 40°-50° | 151.3 | 12.9 |
| 50°-60° | 104.1 | 8.9 |
| 60°-70° | 71.1 | 6.1 |
| 70°-80° | 39.6 | 3.4 |
| 80°-90° | 11.6 | 1.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 558.3 | 47.6 |
| 0°-40° | 794.2 | 67.8 |
| 0°-60° | 1049.7 | 89.6 |
| 0°-90° | 1172.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1172.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 804 | |
| 5° | 793 | 75 |
| 15° | 728 | 205 |
| 25° | 616 | 279 |
| 35° | 375 | 236 |
| 45° | 192 | 151 |
| 55° | 116 | 104 |
| 65° | 72 | 71 |
| 75° | 37 | 40 |
| 85° | 10 | 12 |
| 90° | 0 | |



TEST NUMBER: P252760

CATALOG NUMBER: LD6B10D010 EU6B10209035 6LBBA1MW

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 803.9 |
| 2.5° | 800.8 |
| 5° | 793.4 |
| 7.5° | 781.8 |
| 10° | 767.1 |
| 12.5° | 748.7 |
| 15° | 728.5 |
| 17.5° | 705.2 |
| 20° | 680.1 |
| 22.5° | 651.9 |
| 25° | 615.8 |
| 27.5° | 566.7 |
| 30° | 509.1 |
| 32.5° | 443.0 |
| 35° | 375.0 |
| 37.5° | 315.5 |
| 40° | 266.5 |
| 42.5° | 225.5 |
| 45° | 191.8 |
| 47.5° | 165.4 |
| 50° | 144.6 |
| 52.5° | 128.7 |
| 55° | 115.8 |
| 57.5° | 103.5 |
| 60° | 91.9 |
| 62.5° | 81.5 |
| 65° | 71.7 |
| 67.5° | 61.9 |
| 70° | 53.3 |
| 72.5° | 44.7 |
| 75° | 37.4 |
| 77.5° | 30.0 |
| 80° | 22.7 |
| 82.5° | 16.5 |
| 85° | 10.4 |
| 87.5° | 4.3 |
| 90° | 0.0 |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)