

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204390

Luminaire Tested: **LD6B30D010 EU6B30509040 6LBSGPH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204390  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6B30D010 EU6B30509040 6LBSGPH1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH GRAPHITE HAZE TRIM  
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W  
DL3-29.67 W DLE-29.73 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2450.0 lumens  
Efficiency: N/A  
Efficacy: 87.5 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.26  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204390

CATALOG NUMBER: LD6B30D010 EU6B30509040 6LBSGPH1

### Luminous Intensity Polar Plot

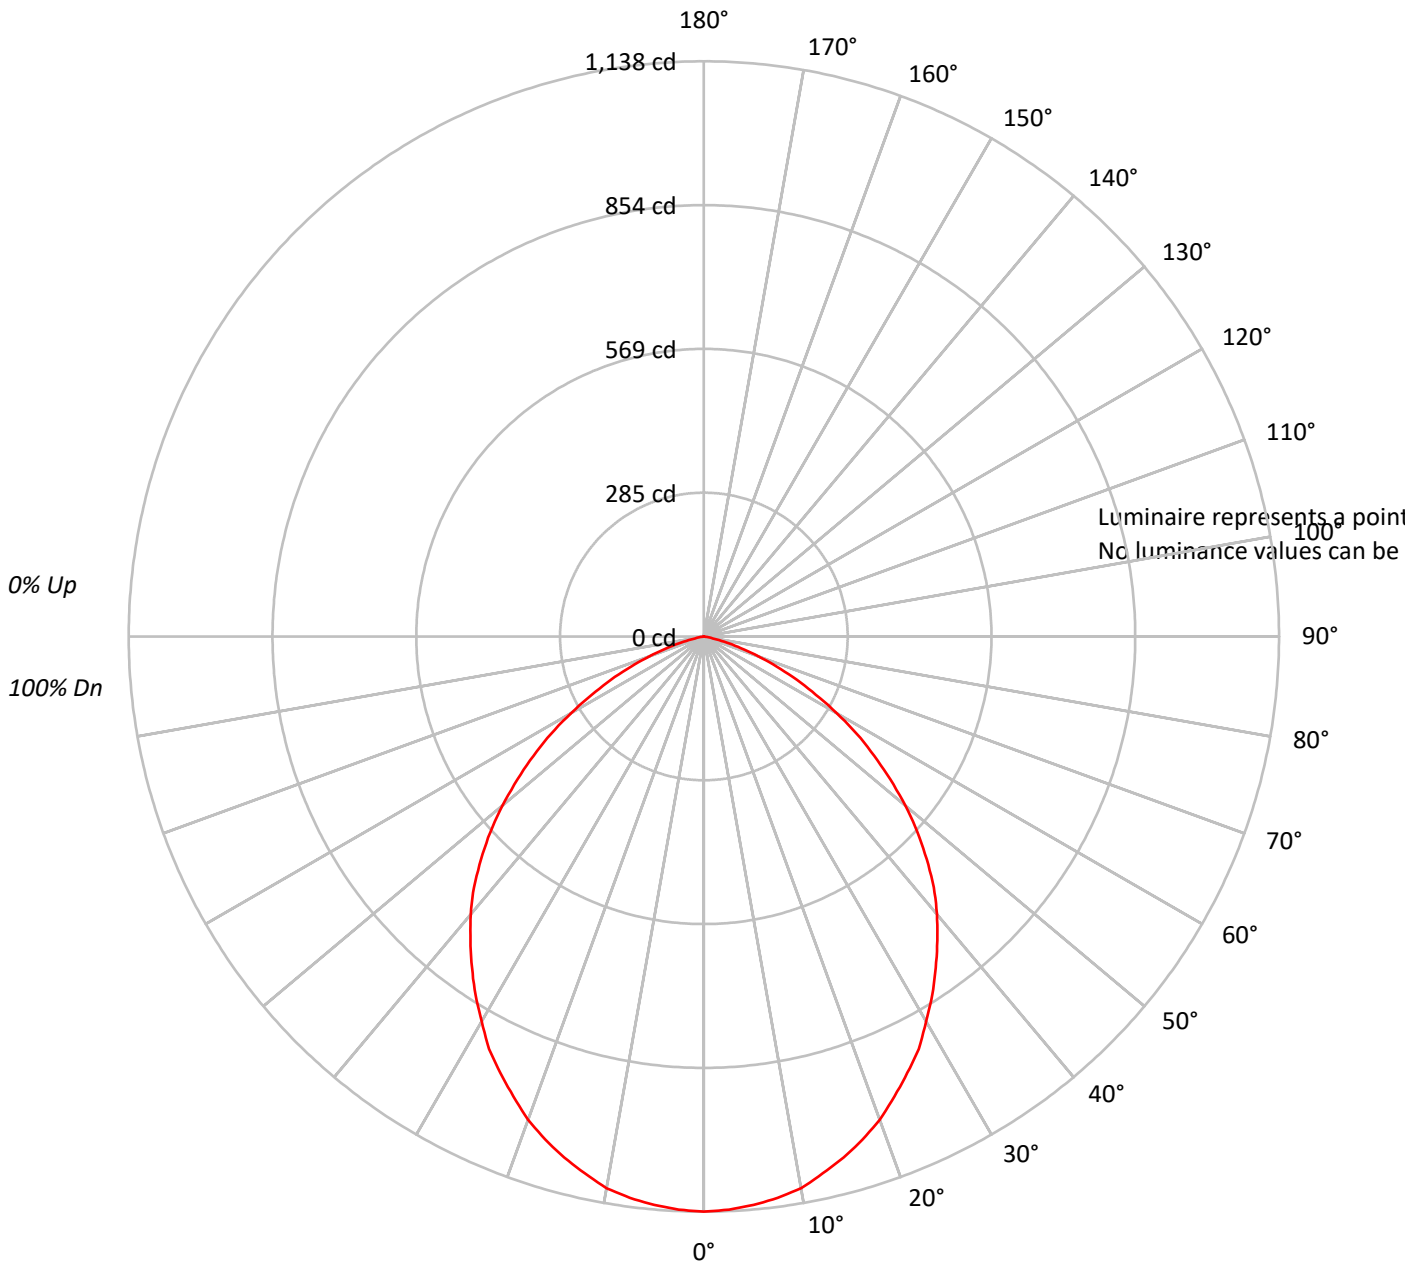



TEST NUMBER: P204390

CATALOG NUMBER: LD6B30D010 EU6B30509040 6LBSGPH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	103	100	108	105	102	99	101	98	96	97	95	93	93	91	90	88			
2	102	95	89	84	100	93	88	83	90	85	82	87	83	80	84	81	78	76			
3	94	85	78	72	92	83	77	71	80	75	70	78	73	69	75	71	68	66			
4	87	76	68	62	85	75	67	62	72	66	61	70	65	60	68	63	59	57			
5	80	68	60	54	78	67	60	54	65	59	53	63	58	53	62	56	52	50			
6	74	62	54	48	73	61	53	48	59	52	47	58	52	47	56	51	47	45			
7	69	57	48	43	68	56	48	43	54	47	42	53	47	42	52	46	42	40			
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36			
9	60	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	32			
10	57	44	37	32	56	44	36	32	43	36	31	42	36	31	41	35	31	30			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204390

CATALOG NUMBER: LD6B30D010 EU6B30509040 6LBSGPH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	107.1	4.4
10°-20°	300.7	12.3
20°-30°	438.6	17.9
30°-40°	500.2	20.4
40°-50°	479.8	19.6
50°-60°	367.5	15.0
60°-70°	201.7	8.2
70°-80°	53.6	2.2
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	846.5	34.6
0°-40°	1346.7	55.0
0°-60°	2194.0	89.5
0°-90°	2450.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2450.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1138	
5°	1129	107
15°	1067	301
25°	953	439
35°	800	500
45°	623	480
55°	412	367
65°	203	202
75°	47	54
85°	0	1
90°	0	



TEST NUMBER: P204390

CATALOG NUMBER: LD6B30D010 EU6B30509040 6LBSGPH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1137.9
2.5°	1135.0
5°	1129.1
7.5°	1120.3
10°	1108.5
12.5°	1087.9
15°	1067.4
17.5°	1043.8
20°	1017.4
22.5°	985.0
25°	952.7
27.5°	920.3
30°	879.2
32.5°	840.9
35°	799.8
37.5°	758.6
40°	717.5
42.5°	673.3
45°	623.4
47.5°	573.4
50°	520.4
52.5°	464.6
55°	411.7
57.5°	358.7
60°	302.9
62.5°	249.9
65°	202.9
67.5°	155.8
70°	114.7
72.5°	76.4
75°	47.0
77.5°	20.6
80°	5.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)