

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179608

Luminaire Tested: **LDA6A45927D010TE LARH30NF 6LFC1H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P179608
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26666)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA6A45927D010TE LARH30NF 6LFC1H
Description: PORTFOLIO 6" Flat Cone, Self-flanged, 30° Narrow Flood
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3649.9 lumens
Efficiency: N/A
Efficacy: 68.9 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.55
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 53
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P179608

CATALOG NUMBER: LDA6A45927D010TE LARH30NF 6LFC1H

Luminous Intensity Polar Plot

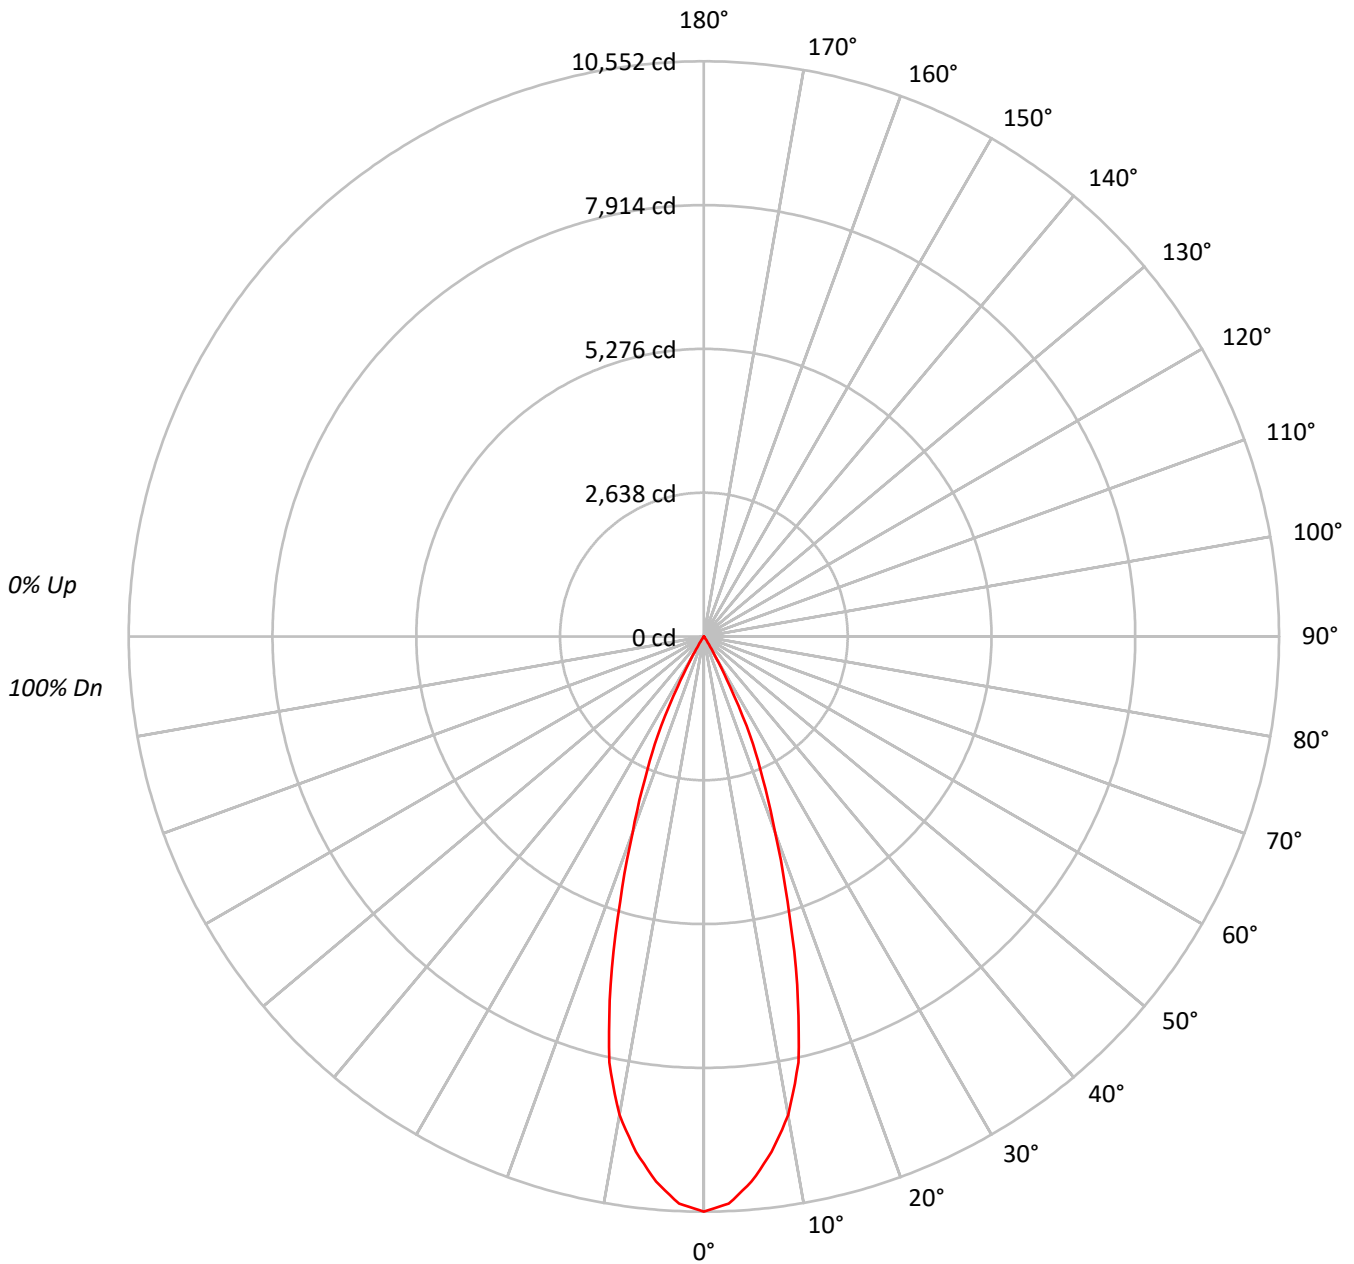



TEST NUMBER: P179608

CATALOG NUMBER: LDA6A45927D010TE LARH30NF 6LFC1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96		
2	111	107	104	101	109	105	103	100	102	100	98	99	98	96	97	95	94	93		
3	107	102	98	95	105	101	97	95	98	95	93	96	94	92	94	92	90	89		
4	103	98	94	90	102	97	93	90	95	91	89	93	90	88	91	89	87	86		
5	100	94	89	86	99	93	89	86	91	88	85	90	87	84	88	86	84	83		
6	97	90	86	83	96	89	85	82	88	85	82	87	84	81	86	83	81	80		
7	94	87	82	79	93	86	82	79	85	81	79	84	81	78	83	80	78	77		
8	91	84	79	76	90	83	79	76	82	79	76	81	78	76	81	78	75	74		
9	88	81	77	74	87	81	76	74	80	76	73	79	76	73	78	75	73	72		
10	85	78	74	71	85	78	74	71	77	73	71	77	73	71	76	73	71	70		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	578440
5°	552359
10°	496205
15°	375405
20°	223004
25°	121652
30°	27536
35°	2570
40°	1102
45°	535
50°	392
55°	296
60°	252
65°	195
70°	128
75°	169
80°	0
85°	0



TEST NUMBER: P179608

CATALOG NUMBER: LDA6A45927D010TE LARH30NF 6LFC1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	922.8	25.3
10°-20°	1771.4	48.5
20°-30°	877.6	24.0
30°-40°	66.6	1.8
40°-50°	6.1	0.2
50°-60°	3.0	0.1
60°-70°	1.7	0.0
70°-80°	0.7	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3571.7	97.9
0°-40°	3638.3	99.7
0°-60°	3647.5	99.9
0°-90°	3649.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3649.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10552	
5°	10038	923
15°	6615	1771
25°	2011	878
35°	38	67
45°	7	6
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P179608

CATALOG NUMBER: LDA6A45927D010TE LARH30NF 6LFC1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	10551.6
2.5°	10414.9
5°	10037.5
7.5°	9534.9
10°	8914.0
12.5°	8007.9
15°	6614.6
17.5°	5100.6
20°	3822.6
22.5°	2815.1
25°	2011.2
27.5°	1033.6
30°	435.0
32.5°	166.0
35°	38.4
37.5°	23.1
40°	15.4
42.5°	10.0
45°	6.9
47.5°	5.4
50°	4.6
52.5°	3.8
55°	3.1
57.5°	3.1
60°	2.3
62.5°	2.3
65°	1.5
67.5°	1.5
70°	0.8
72.5°	0.8
75°	0.8
77.5°	0.8
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)