

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179734

Luminaire Tested: **LDA6A55835D010TE LARH20SP 6LAL1LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P179734
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26678)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA6A55835D010TE LARH20SP 6LAL1LI
Description: PORTFOLIO 6" Lensed Adjustable, Self-flanged, 20° Spot
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4439.0 lumens
Efficiency: N/A
Efficacy: 72.8 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.45
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 61
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P179734

CATALOG NUMBER: LDA6A55835D010TE LARH20SP 6LAL1LI

Luminous Intensity Polar Plot

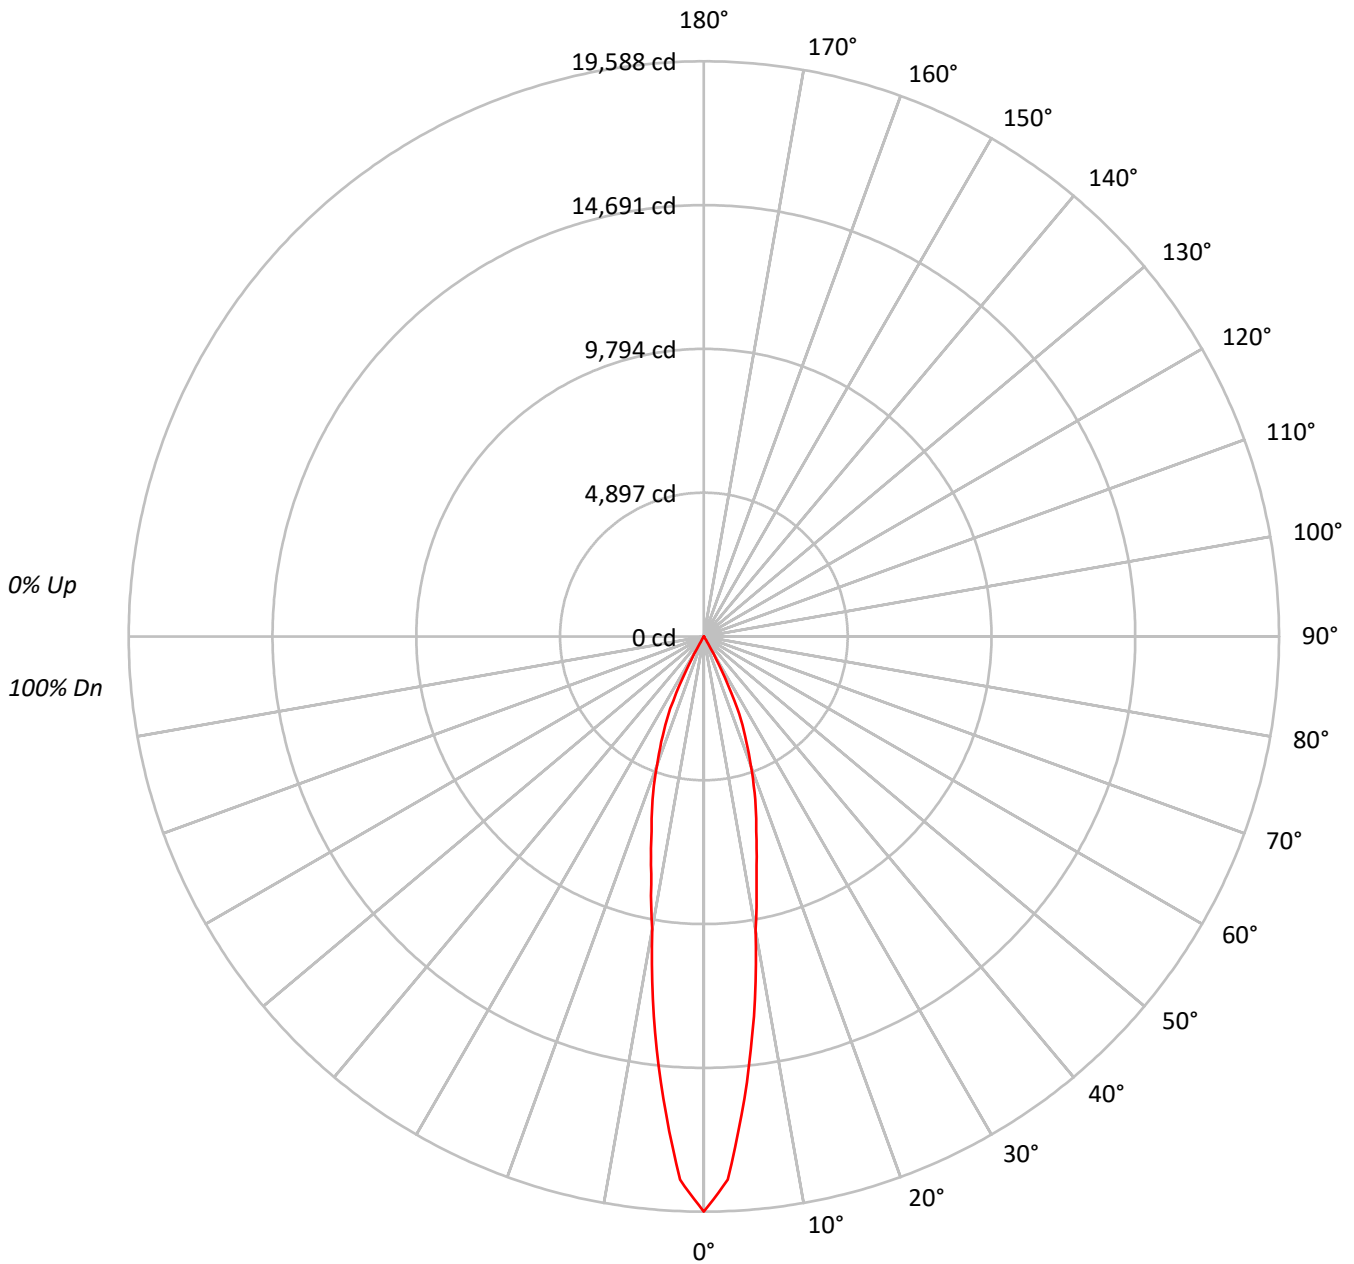



TEST NUMBER: P179734

CATALOG NUMBER: LDA6A55835D010TE LARH20SP 6LAL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96	96	96	96
2	111	107	104	102	109	106	103	100	102	100	98	100	98	96	97	96	94	93	93	93	93
3	107	103	99	96	105	101	98	95	99	96	94	96	94	92	94	92	91	90	90	90	90
4	104	98	94	91	102	97	94	91	95	92	90	93	91	89	92	89	88	86	86	86	86
5	101	94	90	87	99	94	90	87	92	89	86	91	88	85	89	87	85	83	83	83	83
6	97	91	87	84	96	90	86	83	89	85	83	88	85	82	87	84	82	81	81	81	81
7	95	88	84	80	93	87	83	80	86	83	80	85	82	80	84	81	79	78	78	78	78
8	92	85	81	78	91	84	80	78	83	80	77	83	79	77	82	79	77	76	76	76	76
9	89	82	78	75	88	82	78	75	81	77	75	80	77	75	80	77	74	73	73	73	73
10	87	80	75	73	86	79	75	73	79	75	72	78	75	72	77	74	72	71	71	71	71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1073817
5°	869753
10°	564034
15°	390388
20°	272720
25°	163915
30°	17281
35°	1673
40°	1002
45°	620
50°	597
55°	860
60°	987
65°	778
70°	641
75°	635
80°	631
85°	629



TEST NUMBER: P179734

CATALOG NUMBER: LDA6A55835D010TE LARH20SP 6LAL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1335.6	30.1
10°-20°	1934.8	43.6
20°-30°	1110.8	25.0
30°-40°	32.6	0.7
40°-50°	7.0	0.2
50°-60°	7.6	0.2
60°-70°	6.3	0.1
70°-80°	3.4	0.1
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4381.3	98.7
0°-40°	4413.8	99.4
0°-60°	4428.5	99.8
0°-90°	4439.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4439.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	19588	
5°	15805	###
15°	6879	1935
25°	2710	1111
35°	25	33
45°	8	7
55°	9	8
65°	6	6
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P179734

CATALOG NUMBER: LDA6A55835D010TE LARH20SP 6LAL1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	19588.0
2.5°	18518.0
5°	15805.2
7.5°	13050.3
10°	10132.5
12.5°	8269.6
15°	6878.6
17.5°	5817.7
20°	4674.8
22.5°	3664.8
25°	2709.9
27.5°	1282.9
30°	273.0
32.5°	34.0
35°	25.0
37.5°	18.0
40°	14.0
42.5°	11.0
45°	8.0
47.5°	7.0
50°	7.0
52.5°	8.0
55°	9.0
57.5°	9.0
60°	9.0
62.5°	8.0
65°	6.0
67.5°	5.0
70°	4.0
72.5°	4.0
75°	3.0
77.5°	3.0
80°	2.0
82.5°	1.0
85°	1.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)