

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179814

Luminaire Tested: **LDA6A55835D010TE LARH40FL 6LFC1H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P179814
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26683)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA6A55835D010TE LARH40FL 6LFC1H
Description: PORTFOLIO 6" Flat Cone, Self-flanged, 40° Flood
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5646.0 lumens
Efficiency: N/A
Efficacy: 92.6 lumens/watt
Spacing Criteria (0/90/45): 0.67 / 0.67 / 0.61
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 61
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P179814

CATALOG NUMBER: LDA6A55835D010TE LARH40FL 6LFC1H

Luminous Intensity Polar Plot

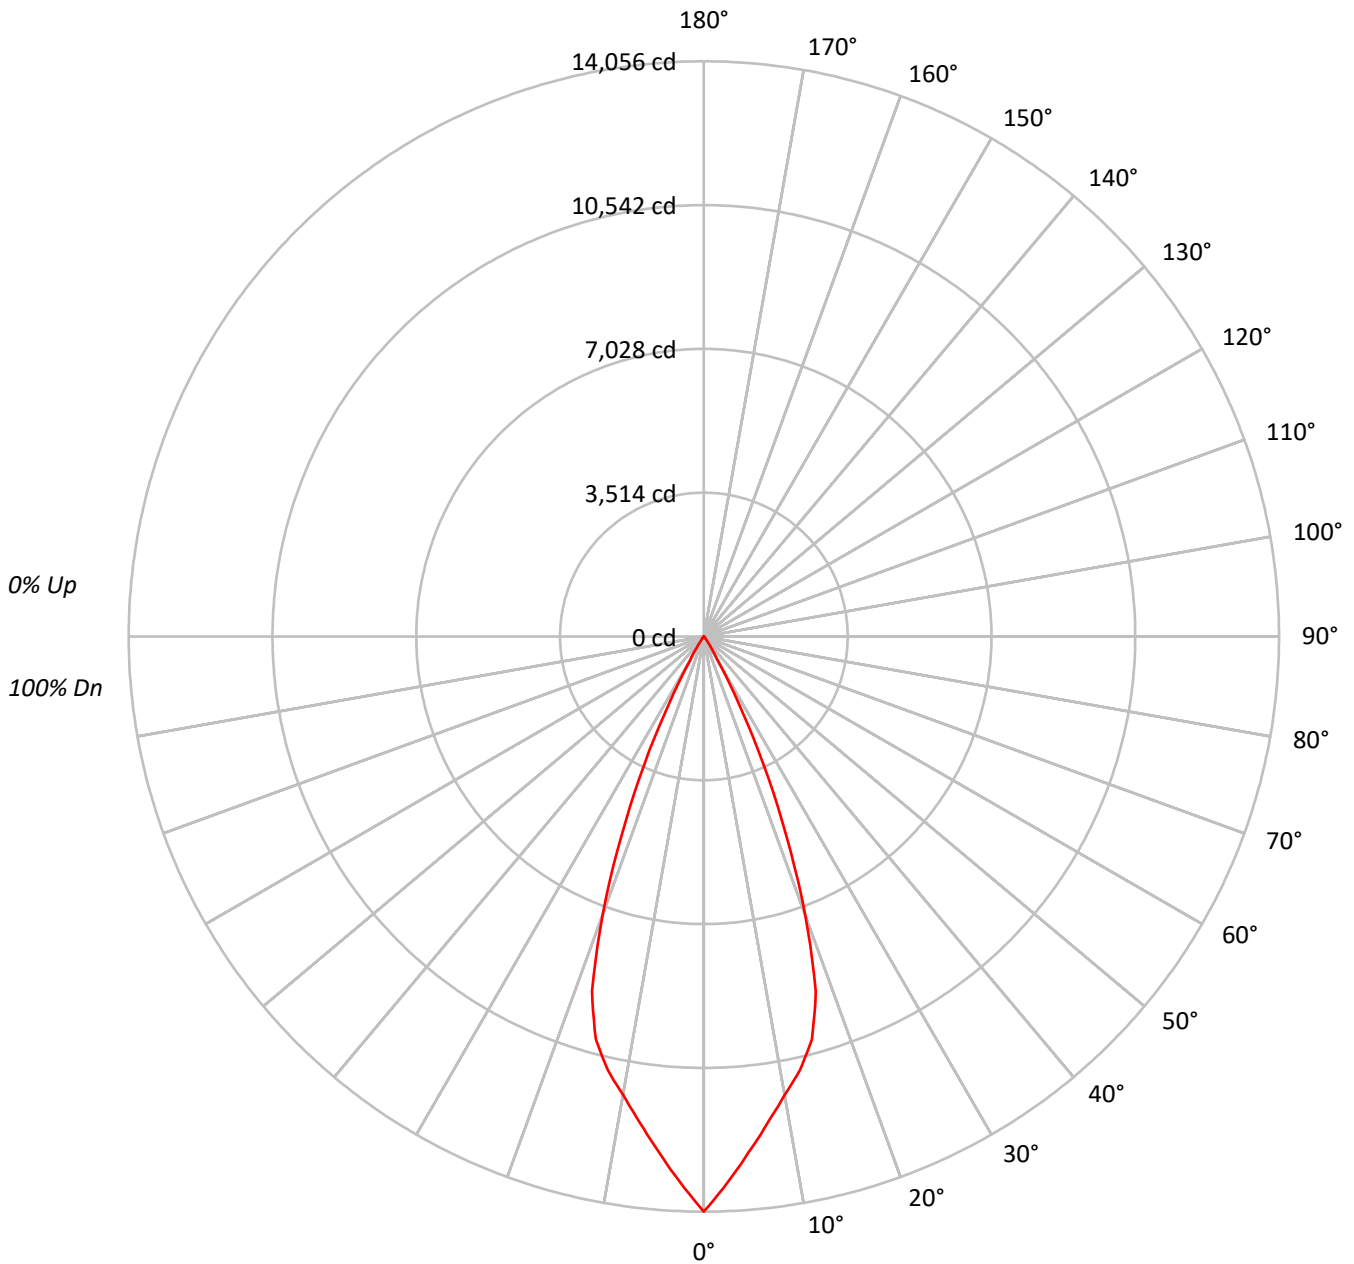



TEST NUMBER: P179814

CATALOG NUMBER: LDA6A55835D010TE LARH40FL 6LFC1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	112	110	108	112	110	108	107	106	105	104	103	101	100	99	98	98	96			
2	110	107	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92			
3	106	101	97	94	105	100	97	94	98	95	92	95	93	91	93	91	89	88			
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84			
5	99	93	88	85	98	92	88	84	90	86	84	89	85	83	87	84	82	81			
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78			
7	92	85	81	77	91	85	80	77	83	80	77	82	79	76	81	78	76	75			
8	89	82	77	74	88	81	77	74	80	77	74	80	76	73	79	76	73	72			
9	86	79	74	71	85	78	74	71	78	74	71	77	73	71	76	73	70	69			
10	84	76	72	69	83	76	71	68	75	71	68	74	71	68	74	70	68	67			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	770525
5°	695706
10°	633110
15°	578738
20°	422382
25°	208022
30°	45070
35°	8566
40°	2290
45°	1008
50°	597
55°	478
60°	439
65°	389
70°	321
75°	212
80°	0
85°	0



TEST NUMBER: P179814

CATALOG NUMBER: LDA6A55835D010TE LARH40FL 6LFC1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1169.3	20.7
10°-20°	2739.3	48.5
20°-30°	1580.2	28.0
30°-40°	137.4	2.4
40°-50°	11.5	0.2
50°-60°	4.6	0.1
60°-70°	2.7	0.0
70°-80°	1.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5488.8	97.2
0°-40°	5626.2	99.6
0°-60°	5642.2	99.9
0°-90°	5646.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5646.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	14056	
5°	12642	###
15°	10197	2739
25°	3439	1580
35°	128	137
45°	13	11
55°	5	5
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P179814

CATALOG NUMBER: LDA6A55835D010TE LARH40FL 6LFC1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	14055.5
2.5°	13350.4
5°	12642.4
7.5°	11980.4
10°	11373.4
12.5°	10850.4
15°	10197.3
17.5°	9090.3
20°	7240.2
22.5°	5241.2
25°	3439.1
27.5°	1782.1
30°	712.0
32.5°	374.0
35°	128.0
37.5°	53.0
40°	32.0
42.5°	20.0
45°	13.0
47.5°	8.0
50°	7.0
52.5°	6.0
55°	5.0
57.5°	4.0
60°	4.0
62.5°	3.0
65°	3.0
67.5°	2.0
70°	2.0
72.5°	1.0
75°	1.0
77.5°	1.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)