

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P179690

Luminaire Tested: **LDA6A55935D010TE LARH20SP 6LA1LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P179690
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26676)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA6A55935D010TE LARH20SP 6LA1LI
Description: PORTFOLIO 6" Adjustable Reflector, Angle-cut Trim, Self-flanged, 20° Spot
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4169.6 lumens
Efficiency: N/A
Efficacy: 68.4 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.48
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 61
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P179690

CATALOG NUMBER: LDA6A55935D010TE LARH20SP 6LA1LI

Luminous Intensity Polar Plot

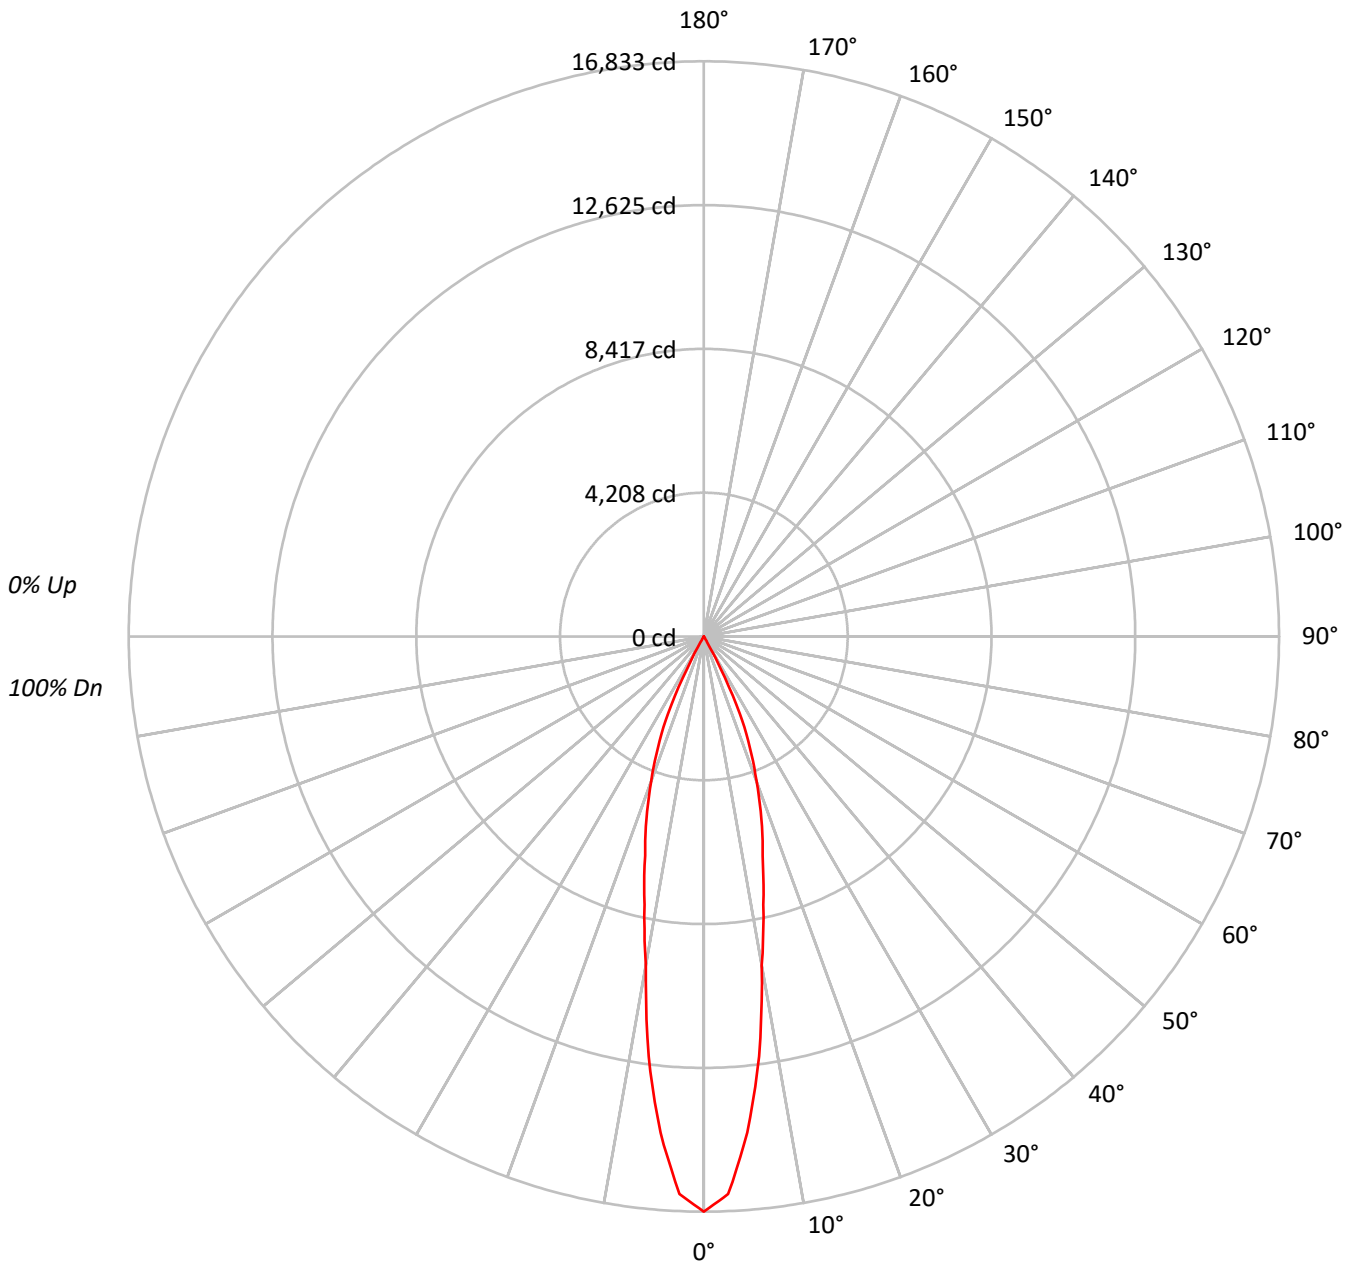



TEST NUMBER: P179690

CATALOG NUMBER: LDA6A55935D010TE LARH20SP 6LA1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96				96															
2	111	107	104	102	109	106	103	101	103	100	98	100	98	96	97	96	94	93				93															
3	107	103	99	96	106	101	98	95	99	96	94	97	94	92	94	93	91	90				90															
4	104	98	94	91	102	97	94	91	95	92	90	94	91	89	92	90	88	87				87															
5	101	95	90	87	99	94	90	87	92	89	86	91	88	86	89	87	85	84				84															
6	98	91	87	84	96	91	87	84	89	86	83	88	85	83	87	84	82	81				81															
7	95	88	84	81	94	87	83	81	86	83	80	85	82	80	84	82	79	78				78															
8	92	85	81	78	91	85	81	78	84	80	78	83	80	77	82	79	77	76				76															
9	89	82	78	75	88	82	78	75	81	78	75	80	77	75	80	77	75	74				74															
10	87	80	76	73	86	80	76	73	79	75	73	78	75	73	78	75	72	71				71															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	922788
5°	802249
10°	543588
15°	376818
20°	262599
25°	151110
30°	11850
35°	970
40°	487
45°	333
50°	290
55°	248
60°	285
65°	337
70°	272
75°	191
80°	284
85°	0



TEST NUMBER: P179690

CATALOG NUMBER: LDA6A55935D010TE LARH20SP 6LA1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1240.7	29.8
10°-20°	1868.7	44.8
20°-30°	1029.5	24.7
30°-40°	21.3	0.5
40°-50°	3.4	0.1
50°-60°	2.6	0.1
60°-70°	2.2	0.1
70°-80°	1.1	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4138.9	99.3
0°-40°	4160.2	99.8
0°-60°	4166.2	99.9
0°-90°	4169.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4169.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	16833	
5°	14578	###
15°	6640	1869
25°	2498	1029
35°	14	21
45°	4	3
55°	3	3
65°	3	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P179690

CATALOG NUMBER: LDA6A55935D010TE LARH20SP 6LA1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	16833.0
2.5°	16329.5
5°	14578.5
7.5°	12391.6
10°	9765.2
12.5°	8041.6
15°	6639.5
17.5°	5597.3
20°	4501.3
22.5°	3520.7
25°	2498.2
27.5°	1066.1
30°	187.2
32.5°	23.9
35°	14.5
37.5°	9.4
40°	6.8
42.5°	5.1
45°	4.3
47.5°	3.4
50°	3.4
52.5°	3.4
55°	2.6
57.5°	2.6
60°	2.6
62.5°	2.6
65°	2.6
67.5°	1.7
70°	1.7
72.5°	0.9
75°	0.9
77.5°	0.9
80°	0.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)