

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: LUMIERE

Report Number: G2-1802-569-26

Luminaire Tested: **203-SS-8LED4010-12-BK-LVR**

Test Date: 04/06/18

**Test Information**

Test Method: LM-79-08  
Report Number: G2-1802-569-26  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1802-569-26)  
Test Lab: INNOVATION CENTER(G2)  
Test Date: 04/06/18  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: LUMIERE  
Catalog Number: 203-SS-8LED4010-12-BK-LVR  
Description: CAMBRIA 203 LED LUMINAIRE, 8 WATT, 4000K CCT, 10 DEGREE SPOT OPTIC,  
REGRESSED HOOD BLACK, HEX CELL LOUVER  
Light Source: (1) SORAA 4000K 95 CRI 10°NSP LED  
SM16-07-10D-940-03  
Ballast/Driver: CHROMA POWER SUPPLY IN0004

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 235.3 lumens  
Efficiency: N/A  
Efficacy: 29.4 lumens/watt  
Spacing Criteria (0/90/45): 0.21 / 0.21 / 0.19  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 8  
Input Voltage (V): 12.0  
Input Current (Ain): 0.709  
Voltage Rise (V): NR  
Power Factor: 0.9468  
Total Harmonic Distortion (THDi): 27.5  
Frequency (hertz): 60  
Stabilization Time: 0.5 HR  
Operation Time: 9 HR  
Ambient Temperature (°C): 24.9  
Test Distance: 25 FT



TEST NUMBER: G2-1802-569-26  
CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

### Luminous Intensity Polar Plot

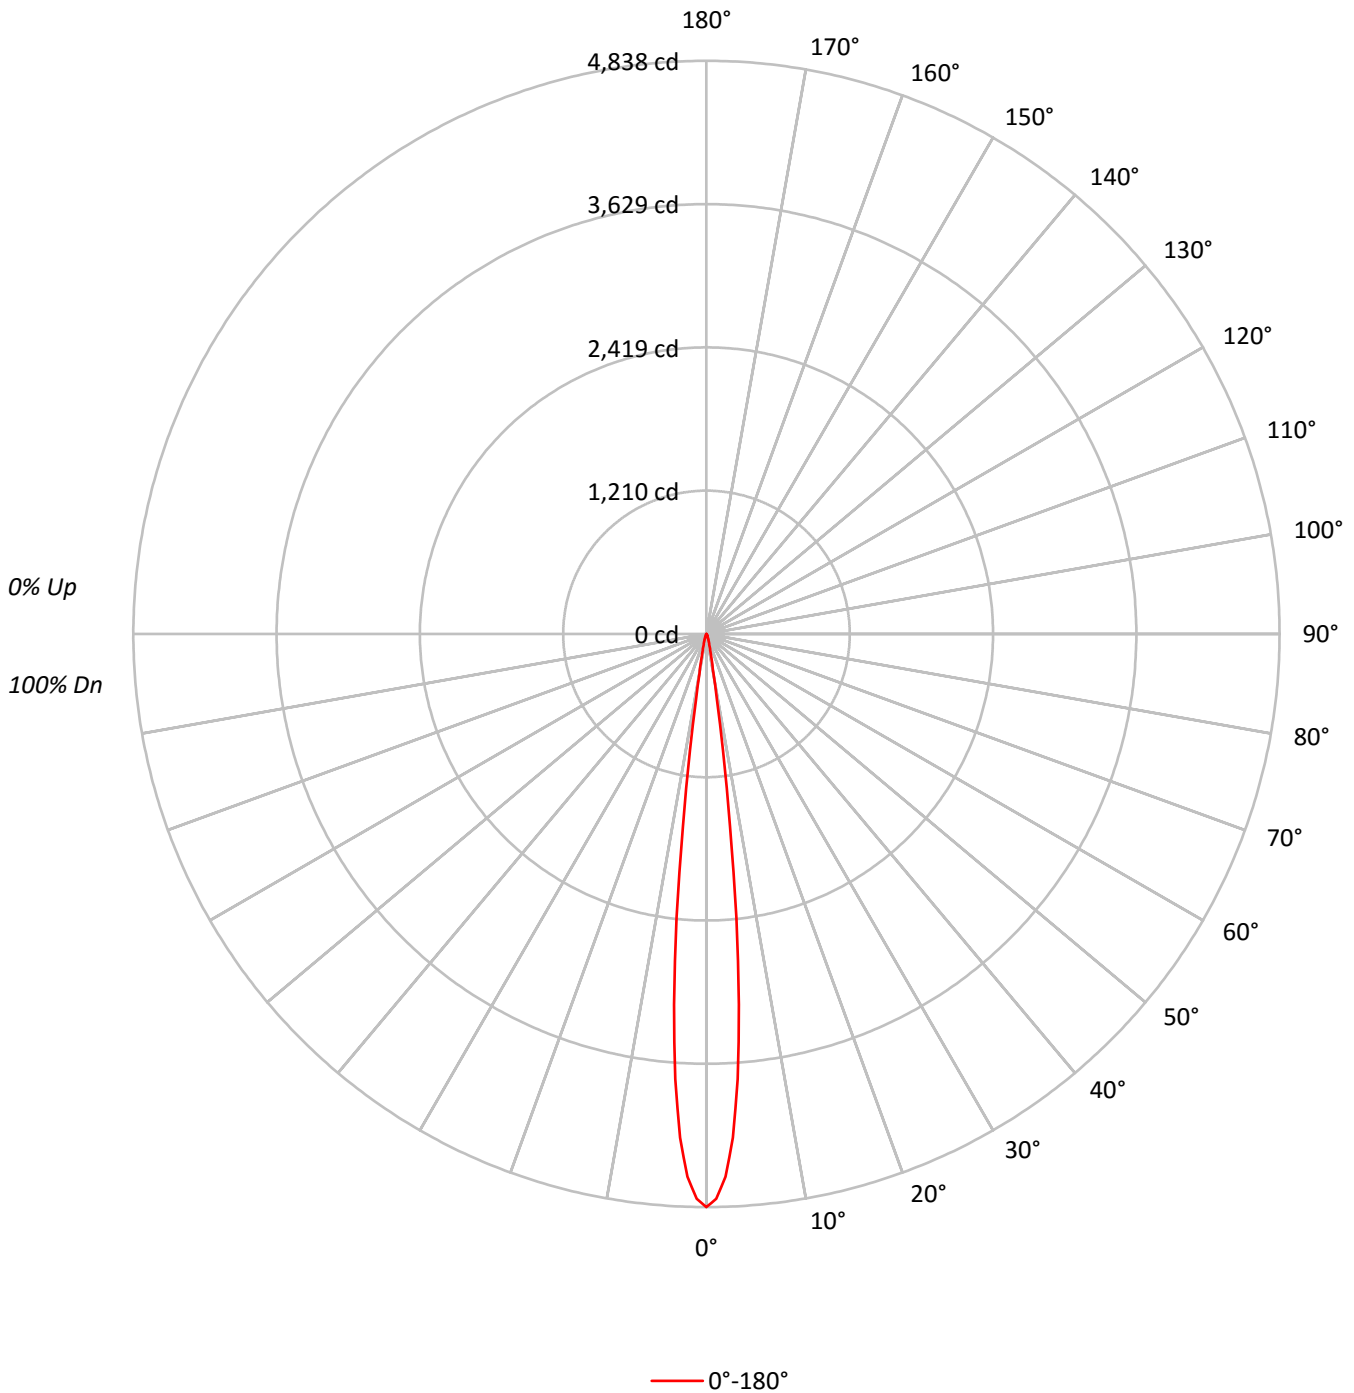



TEST NUMBER: G2-1802-569-26

CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20							
RC	80				70				50				30				10							
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10				
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	111	106	106	106	106	102	102	102	102	100	100	100	100
1	116	115	113	112	114	112	111	110	108	108	107	107	105	104	103	103	102	101	101	101	99	99	99	99
2	114	111	109	107	112	109	107	106	106	105	103	103	104	102	101	101	101	100	99	99	98	98	98	98
3	111	108	105	103	110	107	104	103	104	103	101	101	102	101	99	99	100	99	98	98	97	97	97	97
4	109	106	103	101	108	105	102	100	103	101	99	99	101	99	98	98	100	98	97	97	96	96	96	96
5	108	104	101	99	107	103	100	98	101	99	98	98	100	98	97	97	99	97	96	96	95	95	95	95
6	106	102	99	97	105	101	99	97	100	98	96	96	99	97	96	96	98	96	95	95	94	94	94	94
7	105	101	98	96	104	100	97	96	99	97	95	95	98	96	95	95	97	96	94	94	94	94	94	94
8	104	99	97	95	103	99	96	95	98	96	94	94	97	95	94	94	97	95	94	94	93	93	93	93
9	102	98	96	94	102	98	95	94	97	95	93	93	97	95	93	93	96	94	93	93	92	92	92	92
10	101	97	95	93	101	97	94	93	96	94	93	93	96	94	92	92	95	94	92	92	92	92	92	92

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2386970
5°	1555130
10°	166329
15°	47503
20°	19952
25°	9255
30°	5697
35°	3614
40°	1932
45°	1395
50°	768
55°	860
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: G2-1802-569-26

CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	189.4	80.5
10°-20°	31.5	13.4
20°-30°	8.7	3.7
30°-40°	3.9	1.7
40°-50°	1.3	0.6
50°-60°	0.5	0.2
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	229.5	97.5
0°-40°	233.5	99.2
0°-60°	235.3	100.0
0°-90°	235.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	235.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4838	
5°	3140	189
15°	93	31
25°	17	9
35°	6	4
45°	2	1
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: G2-1802-569-26  
CATALOG NUMBER: 203-SS-8LED4010-12-BK-LVR

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4838
1°	4768
2°	4584
3°	4259
4°	3768
5°	3140
6°	2406
7°	1637
8°	991
9°	557
10°	332
12.5°	155
15°	93
17.5°	62
20°	38
22.5°	24
25°	17
27.5°	13
30°	10
32.5°	8
35°	6
37.5°	5
40°	3
42.5°	2
45°	2
47.5°	1
50°	1
52.5°	1
55°	1
57.5°	0
60°	0
62.5°	0
65°	0
67.5°	0
70°	0
72.5°	0
75°	0
77.5°	0
80°	0
82.5°	0
85°	0
87.5°	0
90°	0

(END OF REPORT)