

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: SHAPER

Report Number: P229150

Luminaire Tested: **340-6B-10-D010 / 340-EU6B-1020-9024-6LBW1LI-CC**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P229150  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1705-068-11)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: SHAPER  
Catalog Number: 340-6B-10-D010 / 340-EU6B-1020-9024-6LBW1LI-CC  
Description: FARALLON 6" LED GLASS DOWNLIGHT. CYLINDRICAL CLEAR GLASS KIT.  
Light Source: (1) 2400K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 555.0 lumens  
Efficiency: N/A  
Efficacy: 56.1 lumens/watt  
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.71  
Luminous Opening: Circular (Dia: 0.46' x H: 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P229150

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9024-6LBW1LI-CC

### Luminous Intensity Polar Plot

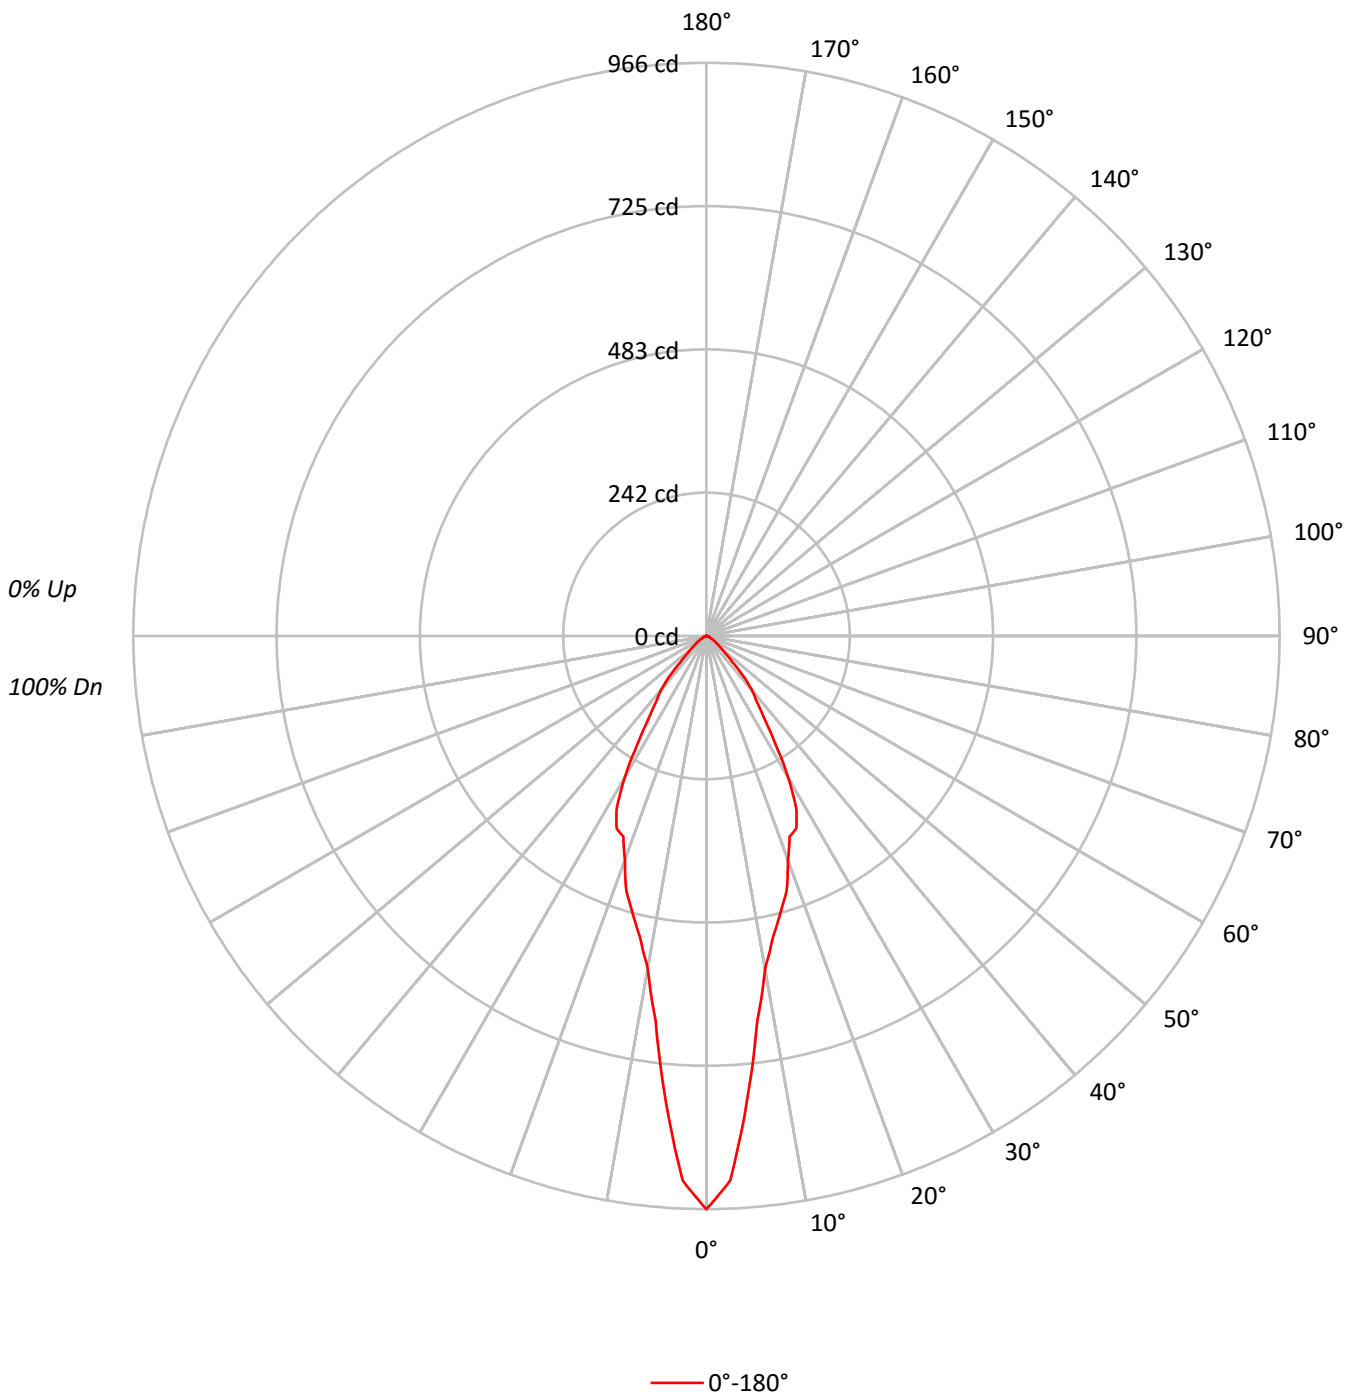



TEST NUMBER: P229150

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9024-6LBW1LI-CC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97	96	94	93
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91	89	87	85
3	101	95	89	85	99	93	88	84	90	86	83		88	85	82		86	83	80	79
4	96	88	82	78	94	87	81	77	85	80	76		83	79	75		81	77	74	73
5	91	82	76	71	89	81	75	71	79	74	70		78	73	70		76	72	69	68
6	86	77	71	66	85	76	70	66	74	69	65		73	68	65		72	68	64	63
7	82	72	66	61	80	71	65	61	70	65	61		69	64	61		68	63	60	59
8	78	68	62	57	76	67	61	57	66	61	57		65	60	57		64	60	56	55
9	74	64	58	54	73	63	58	54	62	57	53		62	57	53		61	56	53	52
10	70	60	54	50	69	60	54	50	59	54	50		58	53	50		58	53	50	49

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	63042
5°	51475
10°	37714
15°	32569
20°	27889
25°	25785
30°	20784
35°	13492
40°	10203
45°	5693
50°	3319
55°	2207
60°	1501
65°	942
70°	801
75°	605
80°	451
85°	449



TEST NUMBER: P229150

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9024-6LBW1LI-CC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	68.0	12.2
10°-20°	134.9	24.3
20°-30°	159.5	28.7
30°-40°	111.6	20.1
40°-50°	52.1	9.4
50°-60°	18.1	3.3
60°-70°	6.9	1.2
70°-80°	2.8	0.5
80°-90°	0.7	0.1
90°-100°	0.4	0.1
100°-110°	0.2	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	362.4	65.3
0°-40°	474.0	85.4
0°-60°	544.2	98.1
0°-90°	554.5	99.9
90°-120°	0.6	0.1
90°-150°	0.6	0.1
90°-180°	1.0	0.2
0°-180°	555.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	966	
5°	786	68
15°	482	135
25°	358	160
35°	169	112
45°	62	52
55°	19	18
65°	6	7
75°	2	3
85°	1	1
90°	0	0
95°	0	0
105°	0	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P229150

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9024-6LBW1LI-CC

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	966.3
2.5°	918.5
5°	786.0
7.5°	655.3
10°	569.3
12.5°	518.5
15°	482.2
17.5°	449.5
20°	401.7
22.5°	366.1
25°	358.2
27.5°	327.9
30°	275.9
32.5°	217.2
35°	169.4
37.5°	138.6
40°	119.8
42.5°	93.2
45°	61.7
47.5°	43.0
50°	32.7
52.5°	24.8
55°	19.4
57.5°	15.1
60°	11.5
62.5°	8.5
65°	6.1
67.5°	5.4
70°	4.2
72.5°	3.6
75°	2.4
77.5°	1.8
80°	1.2
82.5°	0.6
85°	0.6
87.5°	0.6
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.6
100°	0.6
102.5°	0.6
105°	0.0
107.5°	0.0
110°	0.0



TEST NUMBER: P229150

CATALOG NUMBER: 340-6B-10-D010 / 340-EU6B-1020-9024-6LBW1LI-CC

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)