

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204557

Luminaire Tested: **LD6B10D010 EU6B10209035 6LBSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204557
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B10D010 EU6B10209035 6LBSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1000.6 lumens
Efficiency: N/A
Efficacy: 101.1 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204557

CATALOG NUMBER: LD6B10D010 EU6B10209035 6LBSMW1

Luminous Intensity Polar Plot

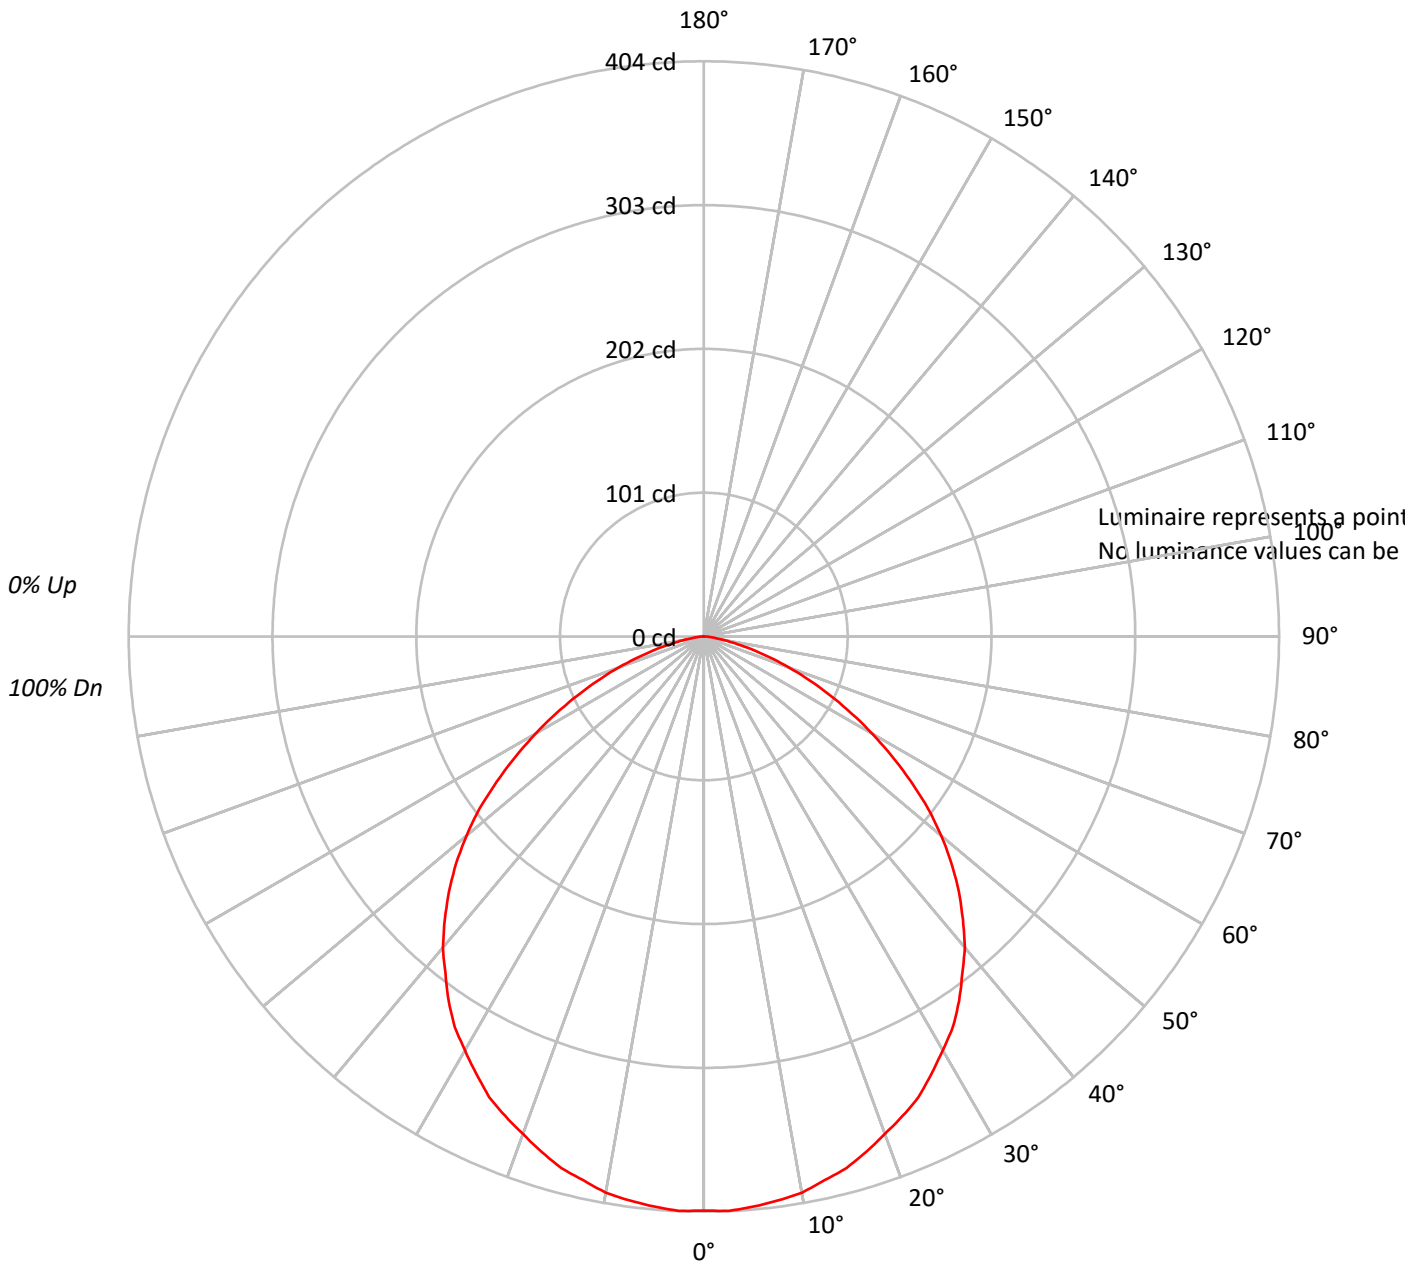



TEST NUMBER: P204557

CATALOG NUMBER: LD6B10D010 EU6B10209035 6LBSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86																																				
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74																																				
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63																																				
4	85	74	66	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54																																				
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47																																				
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42																																				
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37																																				
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33																																				
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30																																				
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27																																				

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204557

CATALOG NUMBER: LD6B10D010 EU6B10209035 6LBSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.2	3.8
10°-20°	108.9	10.9
20°-30°	164.0	16.4
30°-40°	195.1	19.5
40°-50°	194.8	19.5
50°-60°	158.4	15.8
60°-70°	97.4	9.7
70°-80°	37.7	3.8
80°-90°	6.0	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	311.1	31.1
0°-40°	506.2	50.6
0°-60°	859.4	85.9
0°-90°	1000.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1000.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	403	
5°	402	38
15°	387	109
25°	357	164
35°	312	195
45°	253	195
55°	177	158
65°	98	97
75°	34	38
85°	5	6
90°	0	



TEST NUMBER: P204557

CATALOG NUMBER: LD6B10D010 EU6B10209035 6LBSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	403.2
2.5°	403.8
5°	402.0
7.5°	399.6
10°	396.7
12.5°	391.3
15°	386.6
17.5°	379.5
20°	371.8
22.5°	364.6
25°	356.9
27.5°	346.3
30°	335.6
32.5°	325.5
35°	312.5
37.5°	298.2
40°	285.2
42.5°	269.2
45°	253.2
47.5°	236.0
50°	217.6
52.5°	198.6
55°	177.3
57.5°	156.5
60°	136.4
62.5°	116.8
65°	97.8
67.5°	80.0
70°	63.4
72.5°	48.0
75°	34.4
77.5°	22.5
80°	13.6
82.5°	8.3
85°	4.7
87.5°	2.4
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)